
VKP 150 mini

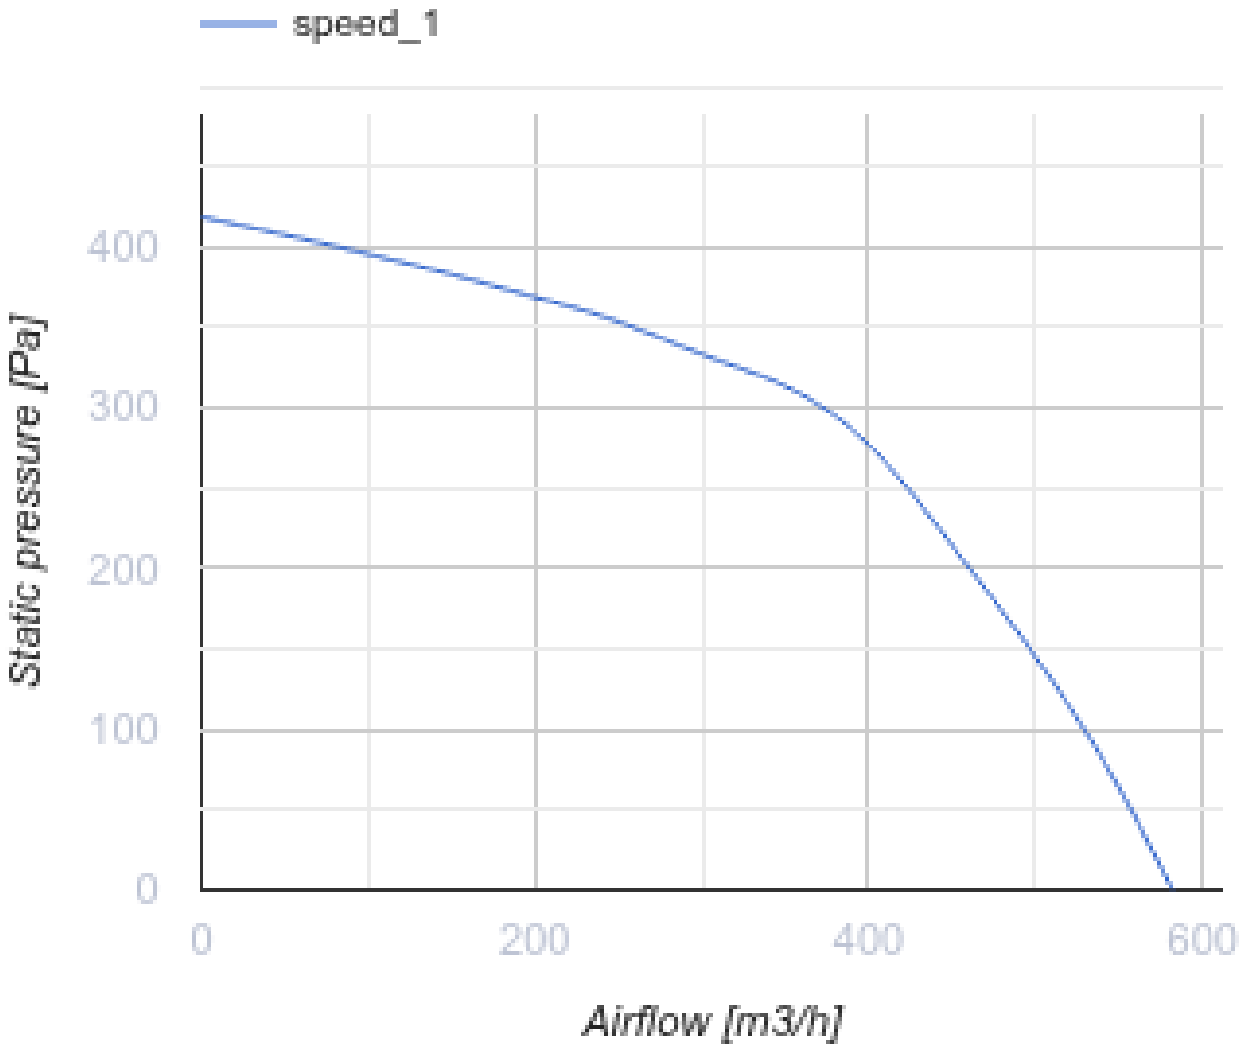


Centrifugal inline fans

• Sound pressure level LpA at 3 m: 46
• Impeller type: Centrifugal impeller with forward curved blades
• Casing material: Coated steel
• Installation in any position


	Unit of measurement	VKP 150 mini
Connected air duct size	mm	150
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	113
Unit current	A	0.52
Maximum airflow	m^3/h	536
Rotation speed at 50hz	-	1050
Sound pressure level LpA at 3 m	dB(A)	46
Weight	kg	7.1
Transported air temperature (max)	°C	50
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44
Impeller material	-	Plastic


speed_1
Static pressure [Pa]
400
300
200
100
0
0
200
400
600
Airflow [m3/h]

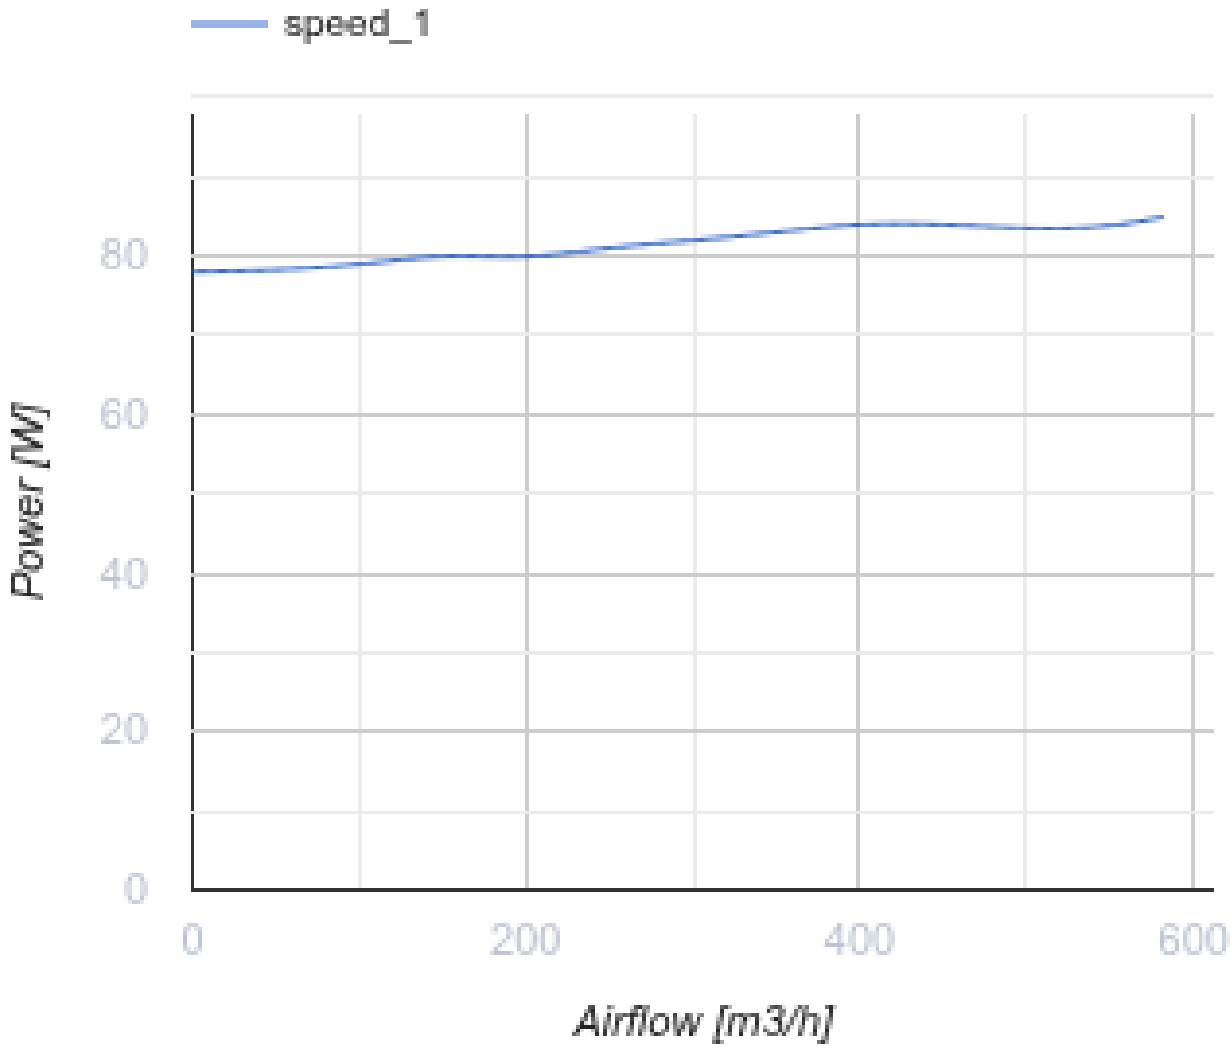


Dimensions

ØD	ØD1	B	H	L	L2
149	149	340	207	447	350

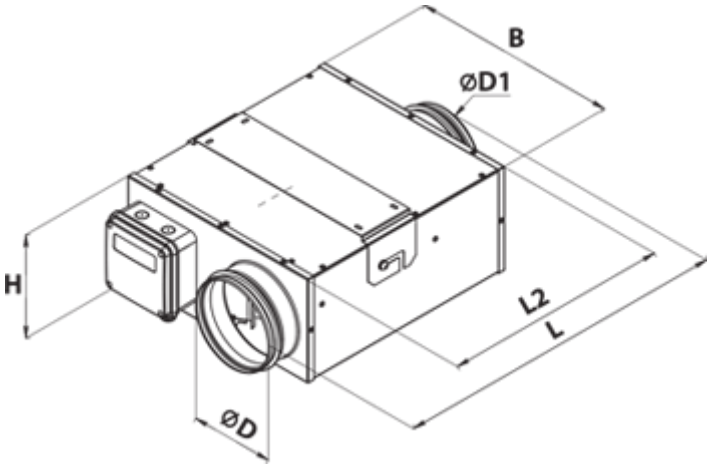
B
ØD1
H
L2
L
ØD

Ecodesign

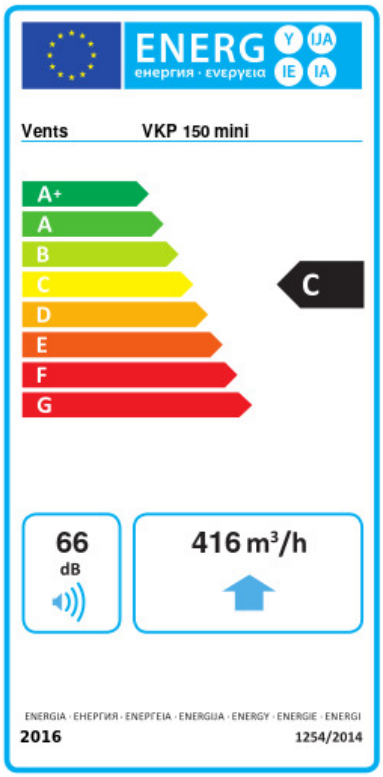

Trademark	Vents					
Model	VKP 150 mini					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold		Average		Warm	
	-51	A+	-24	C	-8.5	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	416					
Electric power input (W)	102.8					
Reference flow rate (m³/s)	0.081					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m³/h))	0.326					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	66					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	173		173		173	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	5536		2830		1280	