



# VKPF 4D 600x300



Inline centrifugal fans for rectangular ducts

- Maximum airflow: 3740
- Sound pressure level LpA at 3 m: 57
- Motor type: AC
- Impeller type: Centrifugal forward curved blades
- Casing material: Galvanized steel
- Installation in any position

	Unit of measurement	VKPF 4D 600x300
Connected air duct size	mm	600x300
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	1560
Unit current	A	2.73
Maximum airflow	m <sup>3</sup> /h	3740
Sound pressure level LpA at 3 m	dB(A)	57
Weight	kg	35
Transported air temperature (max)	°C	65
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

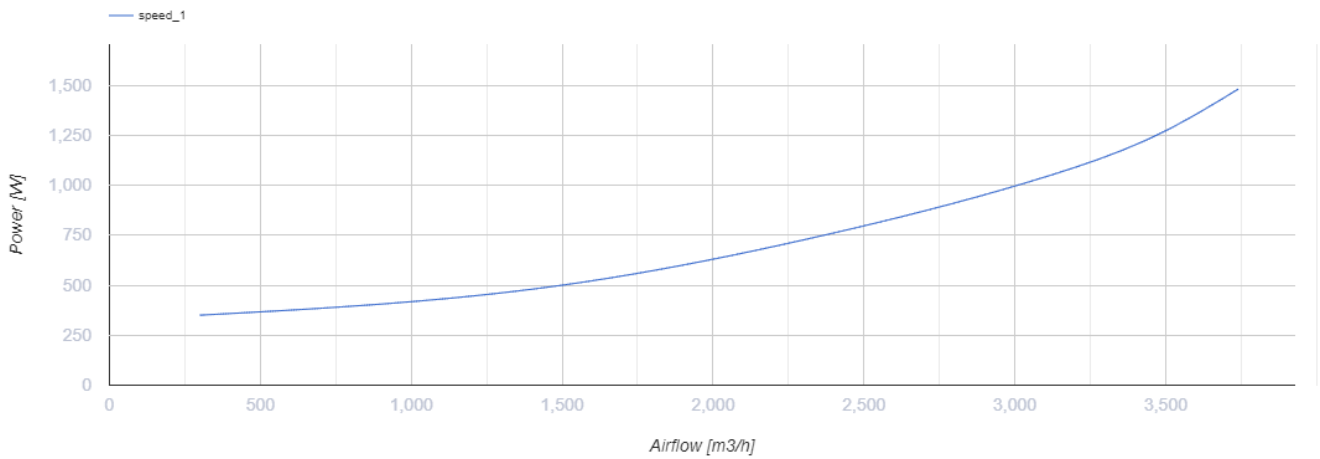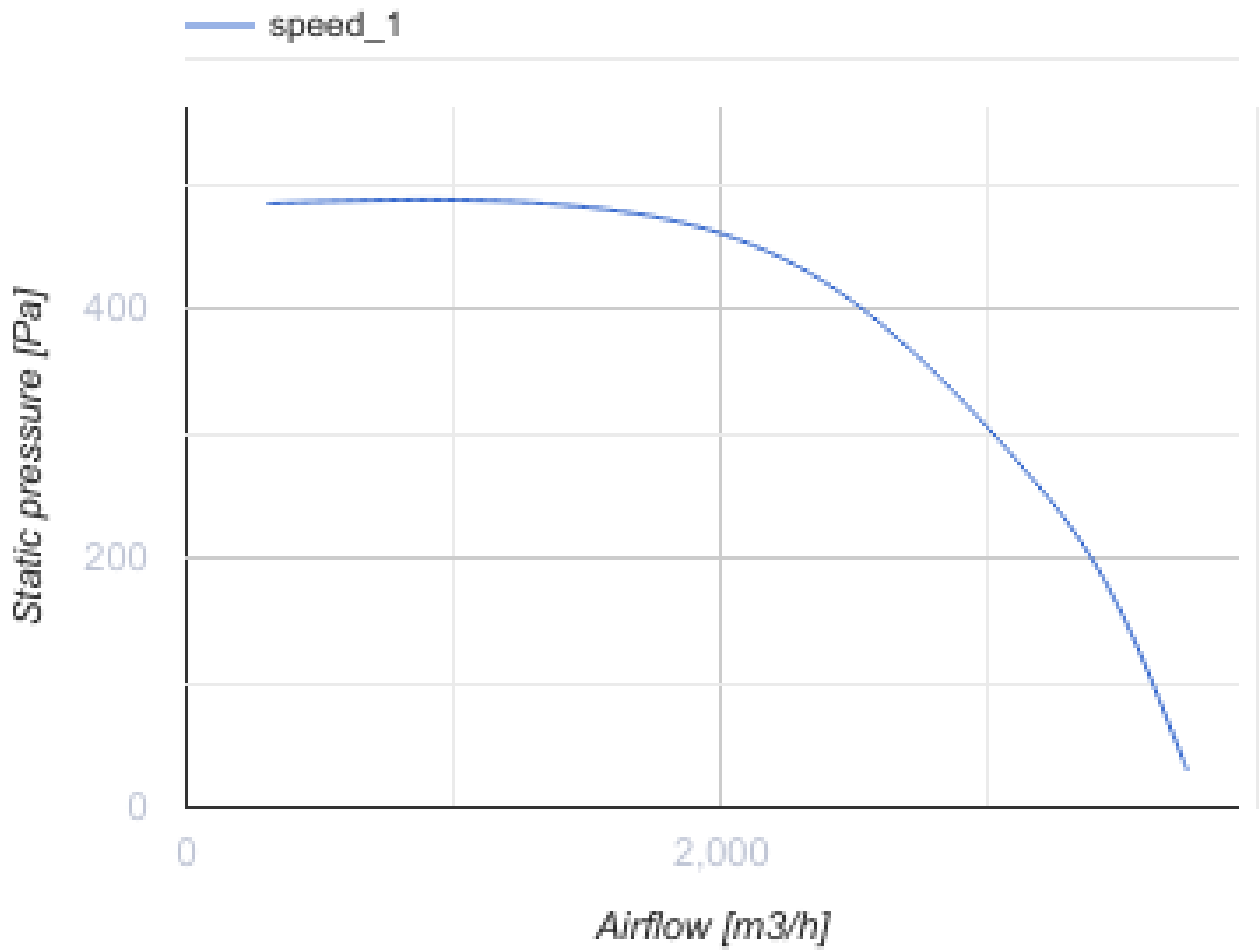

## Dimensions

<b>B</b>	<b>B1</b>	<b>B2</b>	<b>H</b>	<b>H1</b>	<b>H2</b>	<b>H3</b>	<b>L</b>
600	620	640	300	320	340	375	680



## Ecodesign

Trademark	Vents
Model	VKPF 4D 600x300
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m <sup>3</sup> /s)	0.419
Nominal external pressure (Pa)	485
Maximum external leakage rates (%)	2.7
Static efficiency (%)	40.6
Declared typology	NRVU UVU
Sound power level (dB(A))	77
Effective electric power input (kW)	0.51