



VKPI 400x200 L1 EC

Centrifugal fans for rectangular ducts

- Maximum airflow: 1190
- Sound pressure level LpA at 3 m: 30
- Sound insulation
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel
- Installation in any position




| | Unit of measurement | VKPI 400x200 L1 EC |
|--|---------------------|--------------------|
| Connected air duct size | mm | 400x200 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 192 |
| Unit current | A | 1.43 |
| Maximum airflow | m ³ /h | 1190 |
| Sound pressure level LpA at 3 m | dB(A) | 30 |
| Weight | kg | 16.8 |
| Transported air temperature (max) | °C | 50 |
| Transported air temperature (min) | °C | -25 |
| Ingress protection rating | - | IPX4 |
| Ingress protection rating of the drive | - | IP54 |

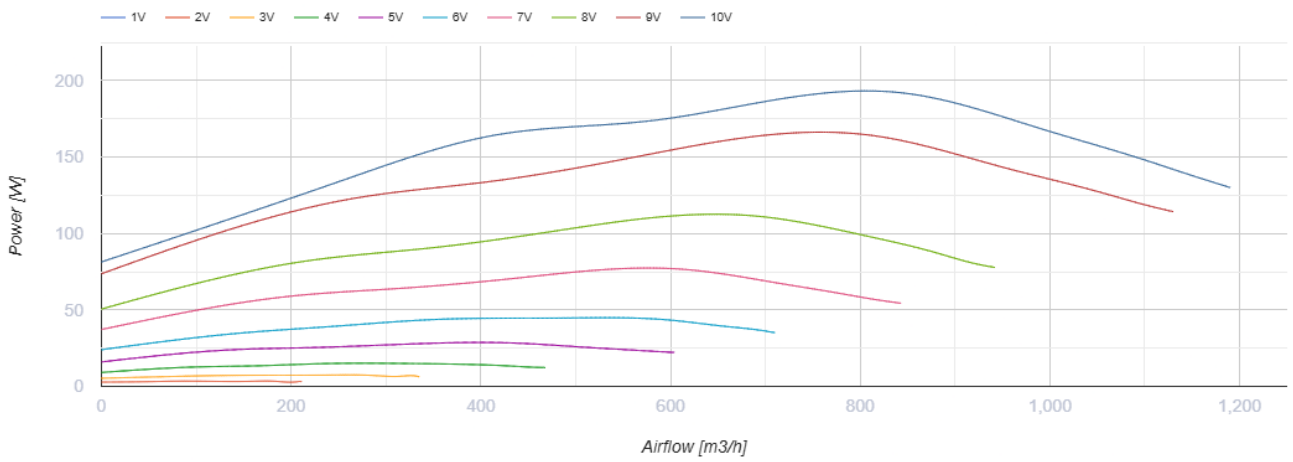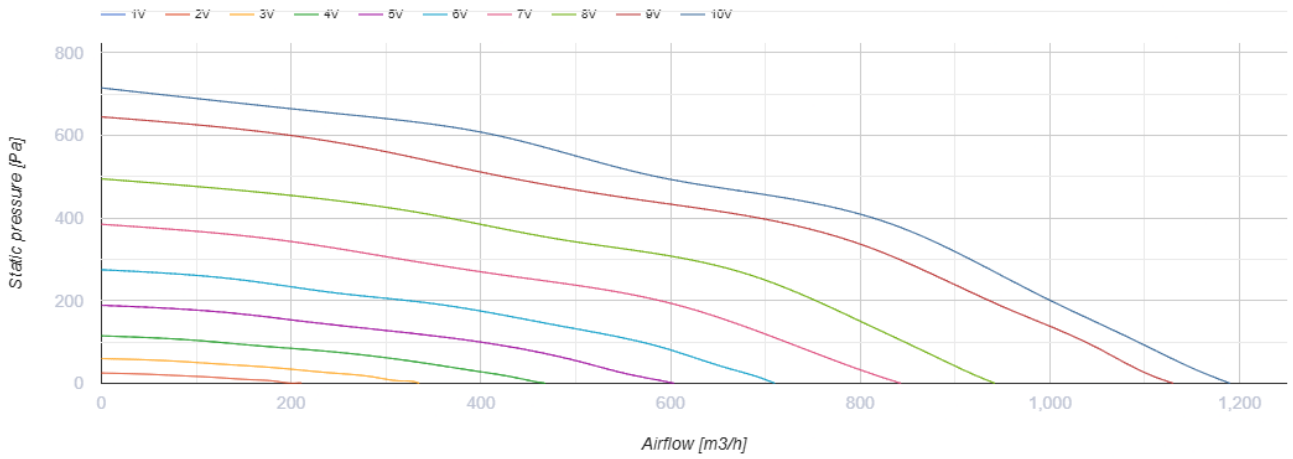

Dimensions

| B | B1 | B3 | H | H1 | H3 | L |
|-----|-----|-----|-----|-----|-----|-----|
| 400 | 420 | 464 | 200 | 220 | 322 | 460 |

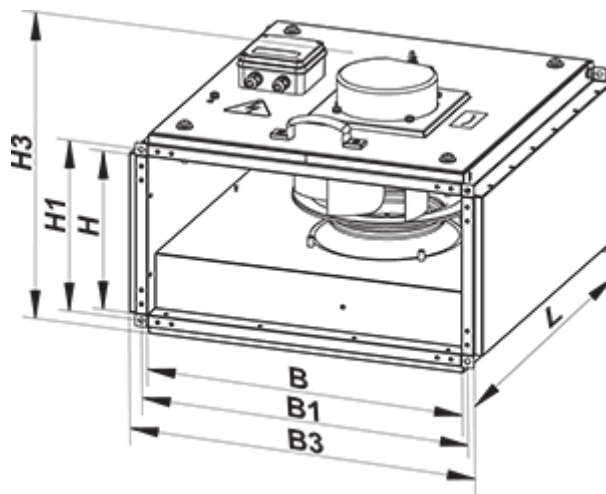

Ecodesign

| Trademark | Vents |
|---------------------------------------|--------------------|
| Model | VKPI 400x200 L1 EC |
| Type of drive installed | Integrated VSD |
| Type of heat recovery system | None |
| Nominal flow rate (m ³ /s) | 0.161 |
| Nominal external pressure (Pa) | 504 |
| Maximum external leakage rates (%) | 2.7 |
| Static efficiency (%) | 54.2 |
| Declared typology | NRVU UVU |
| Effective electric power input (kW) | 0.174 |
| Sound power level (dB(A)) | 50 |