



VKPI 500x300 L1 EC

Centrifugal inline fans with backward curved blades in sound-insulated casings with EC-motors




- Maximum airflow: 2700
- Sound pressure level LpA at 3 m: 43
- Sound insulation
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel
- Installation in any position

	Unit of measurement	VKPI 500x300 L1 EC
Connected air duct size	mm	500x300
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	553
Unit current	A	4.2
Maximum airflow	m ³ /h	2700
Sound pressure level LpA at 3 m	dB(A)	43
Weight	kg	29
Transported air temperature (max)	°C	50
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP54

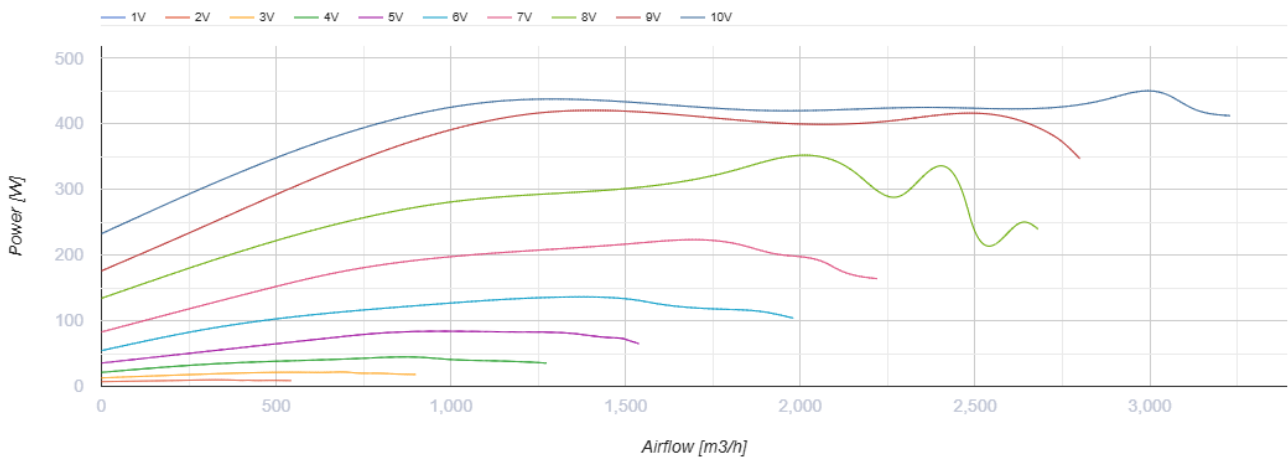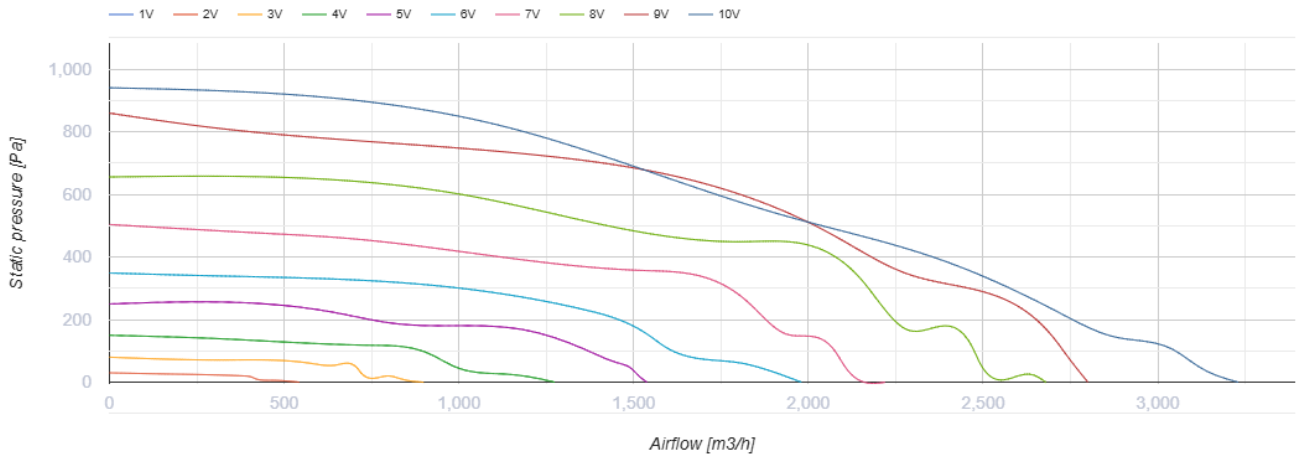

Dimensions

B	B1	B3	H	H1	H3	L
500	520	564	300	320	424	560

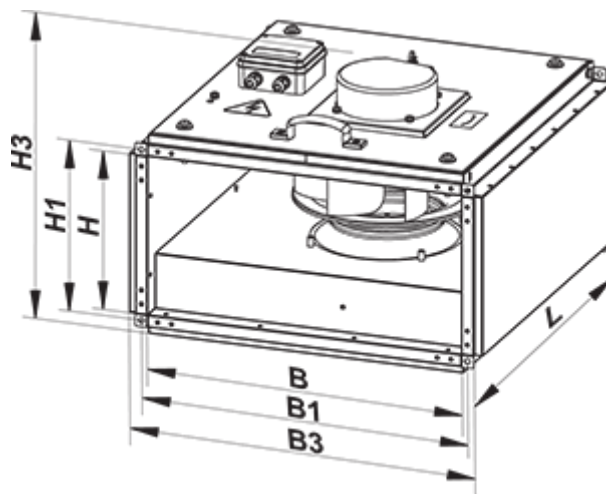

Ecodesign

Trademark	Vents
Model	VKPI 500x300 L1 EC
Type of drive installed	Integrated VSD
Type of heat recovery system	None
Nominal flow rate (m ³ /s)	0.536
Nominal external pressure (Pa)	533
Maximum external leakage rates (%)	2.7
Static efficiency (%)	77.3
Declared typology	NRVU UVU
Effective electric power input (kW)	0.42
Sound power level (dB(A))	63