



# VKV 2E 220



Centrifugal roof fans with vertical air exhaust

- Maximum airflow: 880
- Sound pressure level LpA at 3 m: 50
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel

|  | Unit of measurement | VKV 2E 220 |
|--|---------------------|------------|
| Speed                                  | -                   | 1          |
| Minimum supply voltage                 | V                   | 230        |
| Maximum supply voltage                 | V                   | 230        |
| Power supply frequency                 | Hz                  | 50/60      |
| Rated power                            | W                   | 108        |
| Unit current                           | A                   | 0.49       |
| Maximum airflow                        | m <sup>3</sup> /h   | 880        |
| Sound pressure level LpA at 3 m        | dB(A)               | 50         |
| Weight                                 | kg                  | 7          |
| Transported air temperature (max)      | °C                  | 50         |
| Transported air temperature (min)      | °C                  | -25        |
| Ingress protection rating              | -                   | IPX4       |
| Ingress protection rating of the drive | -                   | IP44       |

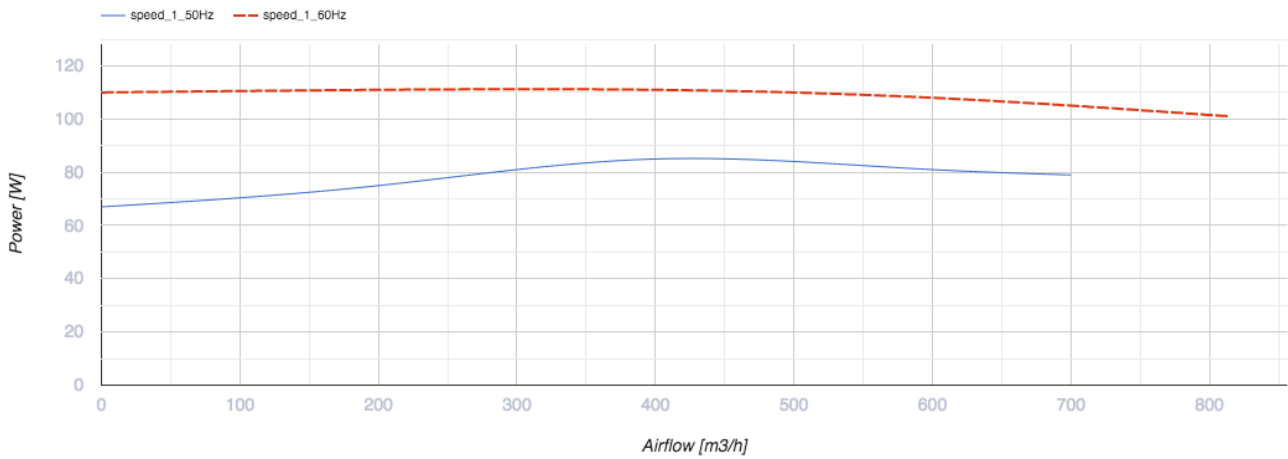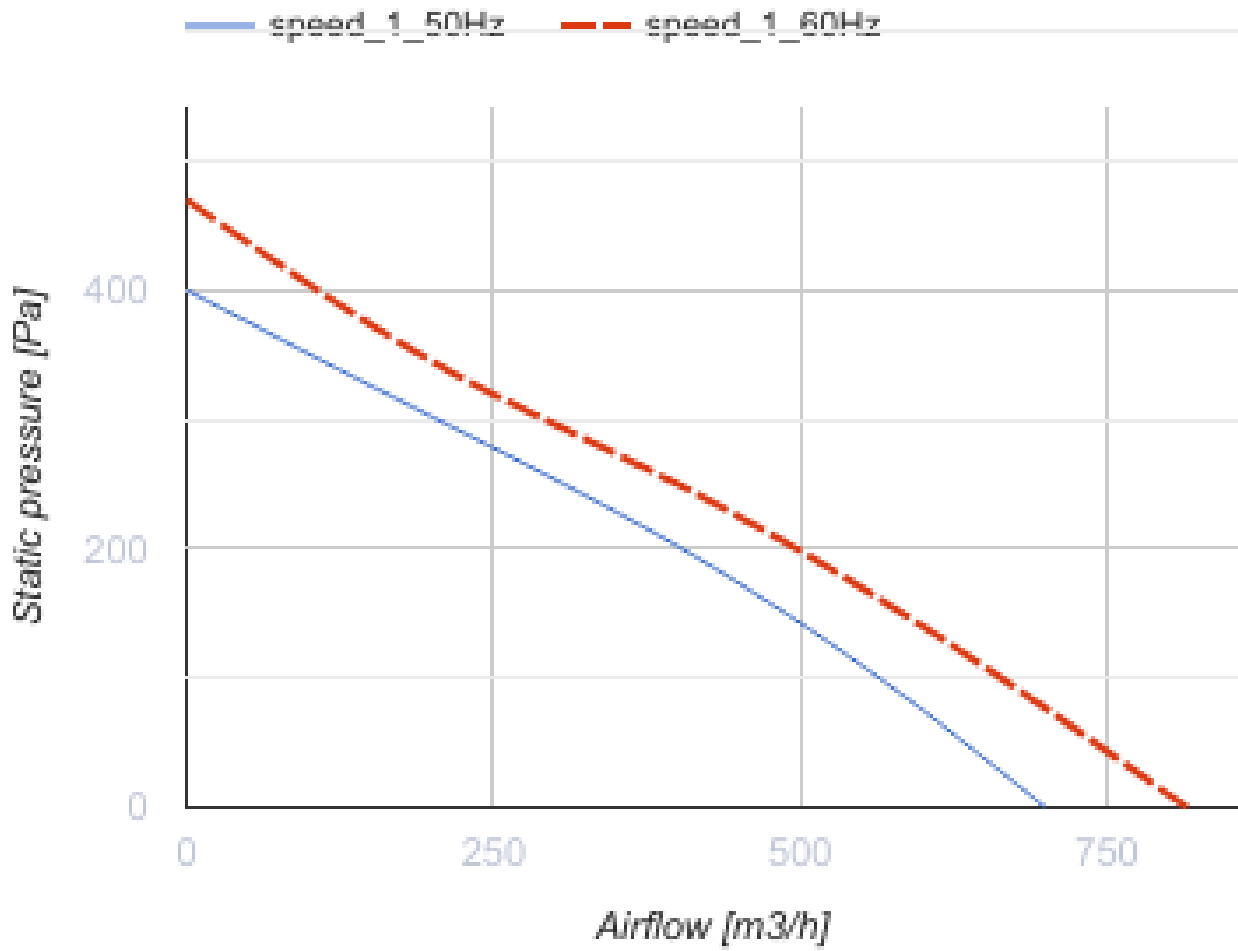


## Dimensions

| A   | B   | C   | ØD  |
|-----|-----|-----|-----|
| 417 | 355 | 190 | 213 |



## Ecodesign

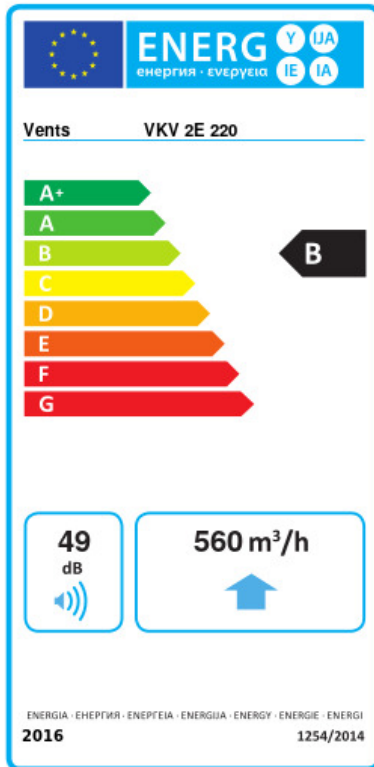

|   |                      |    |         |   |       |   |
|---|----------------------|----|---------|---|-------|---|
| Trademark   | Vents                |    |         |   |       |   |
| Model   | VKV 2E 220           |    |         |   |       |   |
| Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a)) | Cold                 |    | Average |   | Warm  |   |
|   | -53.8                | A+ | -26.7   | B | -11.2 | E |
| Type of ventilation unit                                    | Unidirectional       |    |         |   |       |   |
| Type of drive installed                                     | Variable speed       |    |         |   |       |   |
| Type of heat recovery system                                | None                 |    |         |   |       |   |
| Maximum flow rate (m <sup>3</sup> /h)                       | 560                  |    |         |   |       |   |
| Electric power input (W)                                    | 85                   |    |         |   |       |   |
| Reference flow rate (m <sup>3</sup> /s)                     | 0.109                |    |         |   |       |   |
| Reference pressure difference (Pa)                          | 50                   |    |         |   |       |   |
| Specific power input (SPI) (W/(m <sup>3</sup> /h))          | 0.119                |    |         |   |       |   |
| Control typology  | Local demand control |    |         |   |       |   |
| Maximum external leakage rates (%)                          | 2.7                  |    |         |   |       |   |
| Declared typology   | RVU UVU              |    |         |   |       |   |
| Sound power level (dB(A))                                   | 49                   |    |         |   |       |   |
| The annual electricity consumption (AEC) (kWh/a)            | Cold                 |    | Average |   | Warm  |   |
|   | 63                   |    | 63      |   | 63    |   |
| The annual heating saved (AHS) (kWh/a)                      | Cold                 |    | Average |   | Warm  |   |
|   | 5536                 |    | 2830    |   | 1280  |   |