

## VN-A 80 K2

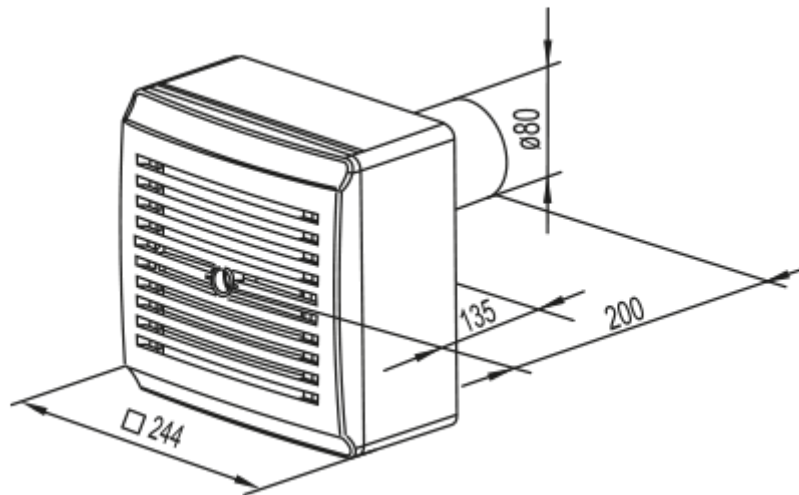


Centrifugal fans in plastic casing

- Maximum airflow: 63
- Sound pressure level LpA at 3 m: 36
- Control: Wired control panel
- Casing material: Plastic
- Backdraft protection: Backdraft damper



|                                 | Unit of measurement | VN-A 80 K2 |      |
|---------------------------------|---------------------|------------|------|
| Connected air duct size         | mm                  | 80         |      |
| Speed                           | -                   | 2          |      |
| Minimum supply voltage          | V                   | 220        |      |
| Maximum supply voltage          | V                   | 240        |      |
| Power supply frequency          | Hz                  | 50         |      |
| Rated power                     | W                   | 15         | 25   |
| Unit current                    | A                   | 0.12       | 0.14 |
| Maximum airflow                 | m <sup>3</sup> /h   | 35         | 63   |
| Sound pressure level LpA at 3 m | dB(A)               | 27         | 36   |
| Weight                          | kg                  | 2.7        |      |
| Ambient air temperature min     | °C                  | 1          |      |
| Ambient air temperature max     | °C                  | 40         |      |
| Ingress protection rating       | -                   | IP55       |      |

### Dimensions



## Accessories

### Speed control switches

| Name                     | Photo                                                                               | Description |
|--------------------------|-------------------------------------------------------------------------------------|-------------|
| <a href="#">P2-1-300</a> |   | Switch      |
| <a href="#">P2-1-300</a> |  | Switch      |