

## VN-B 80 H




Centrifugal fans in plastic casing

- Maximum airflow: 102
- Sound pressure level LpA at 3 m: 46
- Control: Wired control panel
- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Humidity sensor: Built-in

	Unit of measurement	VN-B 80 H	
Connected air duct size	mm	80	
Speed	-	2	
Minimum supply voltage	V	220	
Maximum supply voltage	V	240	
Power supply frequency	Hz	50	
Rated power	W	15	44
Unit current	A	0.12	0.18
Maximum airflow	m <sup>3</sup> /h	35	102
Sound pressure level LpA at 3 m	dB(A)	27	46
Weight	kg	2.7	
Ambient air temperature min	°C	1	
Ambient air temperature max	°C	40	
Ingress protection rating	-	IP55	
ErP compliance	-	2016, 2018	
Cold - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	51.4	
SEC Class Cold	-	A+	
Average - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	24.3	
SEC Class Average	-	C	
Warm - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	8.8	
SEC Class Warm	-	F	
Unit category	-	RVU	

Type of ventilation unit	-	Unidirectional
Type of drive installed	-	Multi-speed
Type of heat recovery system	-	None
Maximum flow rate	m <sup>3</sup> /h	100
Electric power input	W	27
Reference flow rate	m <sup>3</sup> /s	0.019
Reference pressure difference	Pa	50
Specific power input (SPI)	W/(m <sup>3</sup> /h)	0.243
Control typology	-	Local demand control
Maximum external leakage rates	%	2.7
Cold - The annual electricity consumption (AEC)	kWh/a	159
Average - The annual electricity consumption (AEC)	kWh/a	159
Warm - Jährlicher Stromverbrauch (JSV)	kWh/a	159
Cold - The annual heating saved (AHS)	kWh/a	5536
The annual heating saved (AHS) Average	kWh/a	2830
The annual heating saved (AHS) Warm	kWh/a	1280
Declared typology	-	RVU UVU
Sound power level	dB(A)	46

## Dimensions

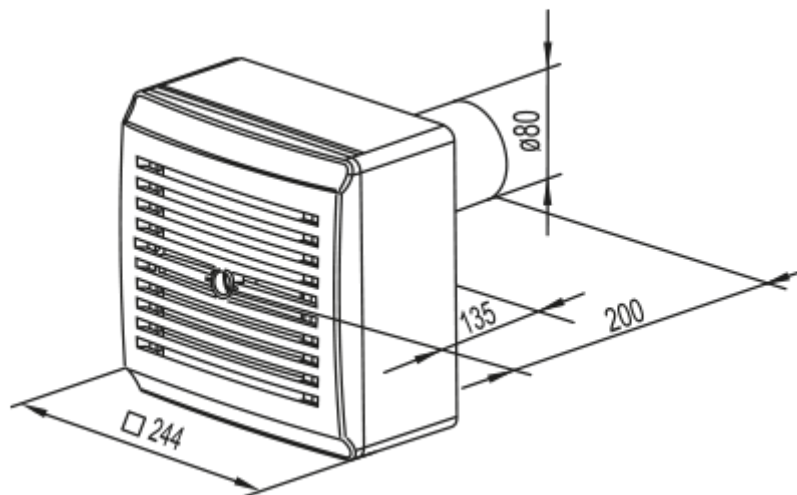

## Accessories

### Speed control switches

Name	Photo	Description
<a href="#">P2-1-300</a>		Switch

[P2-1-300](#)



Switch