

VNV-1A 80 KVK-P TR




Centrifugal fan in plastic casing

- Maximum airflow: 63
- Sound pressure level LpA at 3 m: 36
- Control: Wired control panel
- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Motion sensor
- Humidity sensor: Built-in
- Timer: Built-in

| | Unit of measurement | VNV-1A 80 KVK-P TR | |
|---------------------------------|---------------------|--------------------|------|
| Connected air duct size | mm | 80 | |
| Speed | - | 2 | |
| Minimum supply voltage | V | 220 | |
| Maximum supply voltage | V | 240 | |
| Power supply frequency | Hz | 50 | |
| Rated power | W | 15 | 25 |
| Unit current | A | 0.12 | 0.14 |
| Maximum airflow | m ³ /h | 35 | 63 |
| Sound pressure level LpA at 3 m | dB(A) | 27 | 36 |
| Weight | kg | 2.7 | |
| Ambient air temperature min | °C | 1 | |
| Ambient air temperature max | °C | 40 | |
| Ingress protection rating | - | IP55 | |

Dimensions

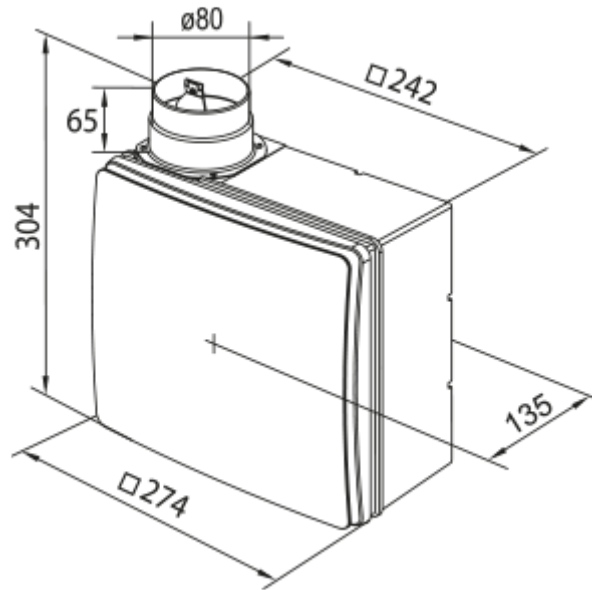


Accessories

Speed control switches

| Name | Photo | Description |
|--------------------------|---|-------------|
| P2-1-300 |  | Switch |

Other accessories

| Name | Photo | Description |
|--------------------------|---|---|
| KVK-P 80 |  | Plastic casing with fire-retarding damper for ventilation unit VNV-1 80 |