

VOK 4E 250


Roof axial fans

- Sound pressure level LpA at 3 m: 55
- Impeller type: Axial
- Casing material: Coated steel

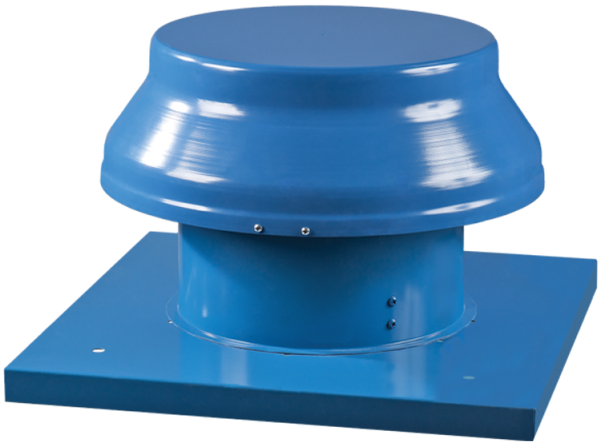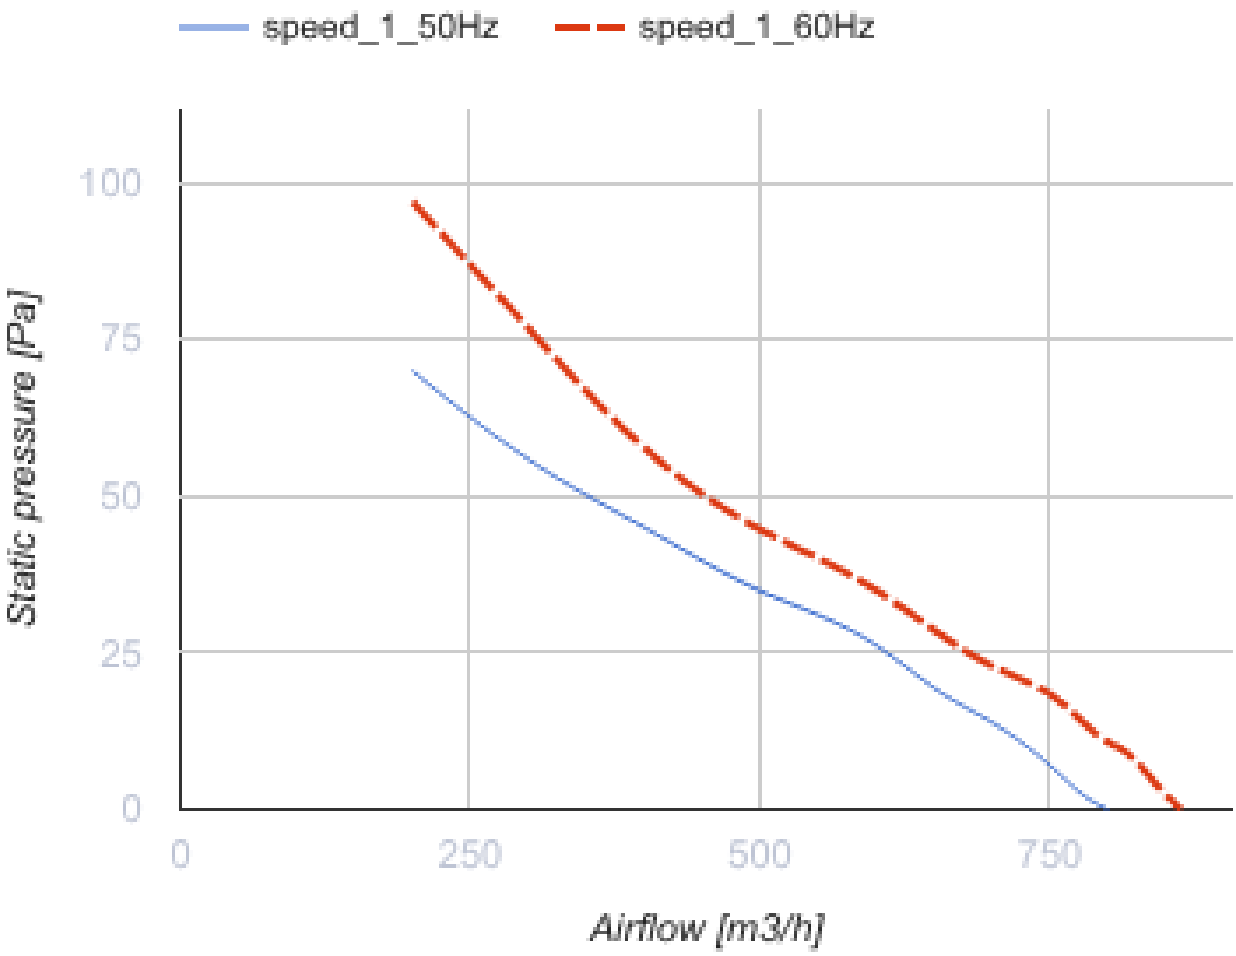


	Unit of measurement	VOK 4E 250
Connected air duct size	mm	250
Phases	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	50
Unit current	A	0.22
Maximum airflow	m³/h	800
Rotation speed at 50hz	-	1380
Sound pressure level LpA at 3 m	dB(A)	55
Weight	kg	7
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IP24
Ingress protection rating of the drive	-	IP44
Impeller material	-	Coated steel
Size	mm	250


speed_1_50Hz
speed_1_60Hz
100
75
50
25
0
Static pressure [Pa]
0
250
500
750
Airflow [m3/h]

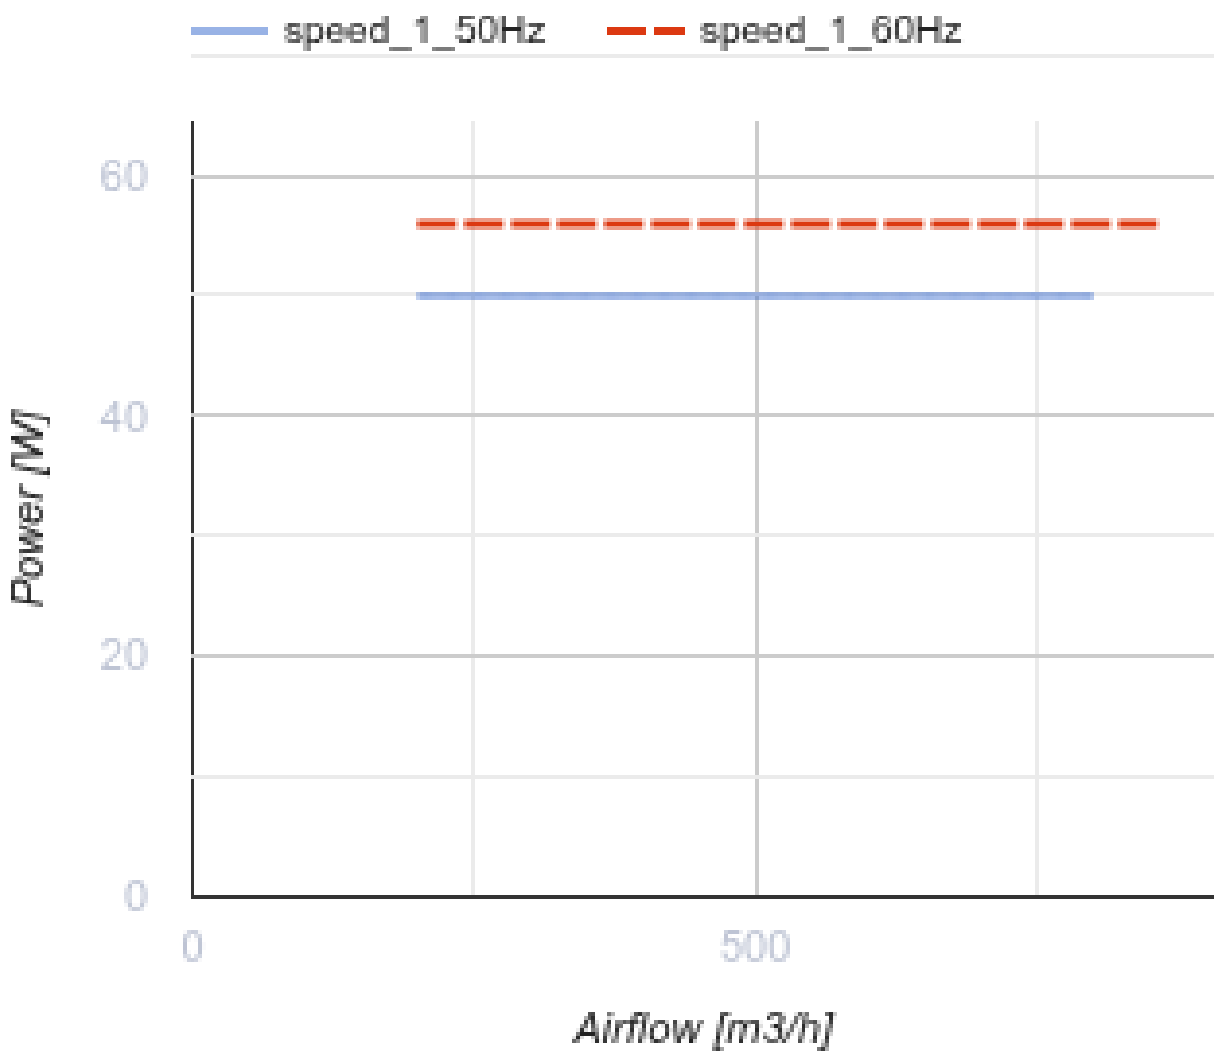

Dimensions

ØD	ØD1	H	L	L1
262	405	280	425	330

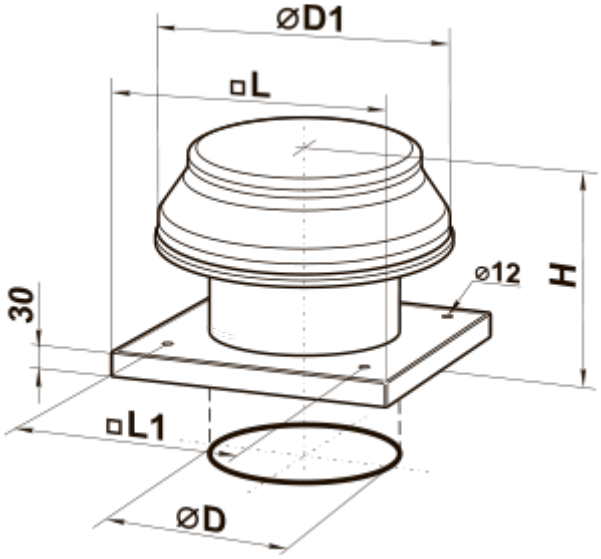

Accessories

Transformer speed controllers

Name	Photo	Description
RSA5E-3,5-T		Speed controllers are applied for air flow control of single phase fans by means of motor step speed control
RSA5E-5,0-T		Speed controllers are applied for air flow control of single phase fans by means of motor step speed control
RSA5E-7,5-T		Speed controllers are applied for air flow control of single phase fans by means of motor step speed control

Accessories for roof fans

Name	Photo	Description
RKV 250-315		Mounting frame
RKVI 250-315		Mounting frame with thermal-insulating layer

Ecodesign

Trademark	Vents
Model	VOK 4E 250
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal external pressure (Pa)	56
Maximum external leakage rates (%)	2.7
Static efficiency (%)	8.9
Declared typology	NRVU UVU
Effective electric power input (kW)	0.054
Sound power level (dB(A))	75