

VPA 315-6,0-3 LCD




Supply units in the compact sound- and heat-insulated casing with electric heater

- Power of electrical reheater: 6000
- Maximum airflow: 1190
- Sound pressure level LpA at 3 m: 30
- Filter: G4
- Sound insulation
- Motor type: AC
- Reheater: Electric
- Control: Remote Control
- Casing material: Galvanized steel

| | Unit of measurement | VPA 315-6,0-3 LCD |
|--|---------------------|-------------------|
| Connected air duct size | mm | 315 |
| Speed | - | 1 |
| Minimum supply voltage | V | 400 |
| Maximum supply voltage | V | 400 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 171 |
| Power of electrical reheater | W | 6000 |
| Unit current | A | 8.7 |
| Maximum airflow | m ³ /h | 1190 |
| Sound pressure level LpA at 3 m | dB(A) | 30 |
| Weight | kg | 60 |
| Filter | - | G4 |
| Transported air temperature (max) | °C | 55 |
| Transported air temperature (min) | °C | -25 |
| Ambient air temperature min | °C | 0 |
| Ambient air temperature max | °C | 40 |
| Ambient air humidity max | % | 80 |
| Ingress protection rating | - | IP22 |
| Ingress protection rating of the drive | - | IP44 |

Dimensions

| ØD | B | B1 | H | L | L1 |
|-----|-----|-------|-----|-----|-----|
| 314 | 527 | 566.5 | 548 | 900 | 750 |

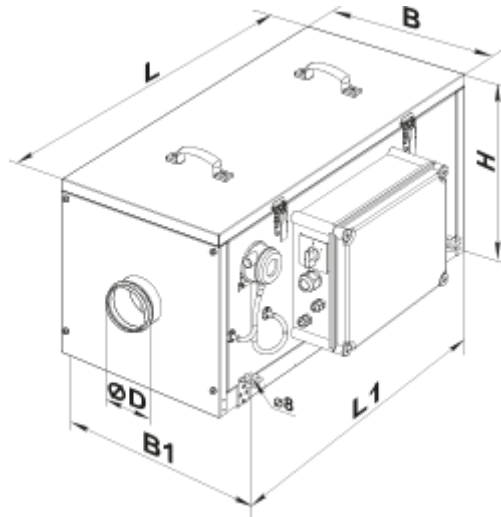



Accessories

For round ducts

| Name | Photo | Description |
|------------------------------|---|---|
| SR 315/600 |  | Silencers made of galvanized steel filled with non-combustible sound-absorbing material |
| SR 315/900 |  | Silencers made of galvanized steel filled with non-combustible sound-absorbing material |
| SR 315/1200 |  | Silencers made of galvanized steel filled with non-combustible sound-absorbing material |
| SRF 315/600 |  | Silencers made of aluminium alloy filled with non-combustible sound-absorbing material |
| SRF 315/900 |  | Silencers made of aluminium alloy filled with non-combustible sound-absorbing material |
| SRF 315/2000 |  | Silencers made of aluminium alloy filled with non-combustible sound-absorbing material |

For round ducts

| Name | Photo | Description |
|------|-------|-------------|
|------|-------|-------------|

| | | |
|-------------------------|---|---|
| KOM 315 |  | Backdraught damper with spring-loaded plates for shutting off air flow in round air ducts |
| KRV 315 |  | Air dampers for automatic air flow control in round ducts |

Other accessories

| Name | Photo | Description |
|-------------------------|---|---|
| VVG 315 |  | Flexible anti-vibration inserts for round ducts |

Other accessories

| Name | Photo | Description |
|------------------|---|-----------------|
| SF 475x470x70 G4 |  | Panel filter G4 |