



# VS 560-4D



Inline centrifugal fans with backward curved blades in heat- and sound-insulated casing


- Maximum airflow: 11340
- Sound pressure level LpA at 3 m: 56
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	VS 560-4D
Connected air duct size	mm	560
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	2380
Unit current	A	5
Maximum airflow	m <sup>3</sup> /h	11340
Sound pressure level LpA at 3 m	dB(A)	56
Weight	kg	99
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-40
Ingress protection rating	-	IPX4

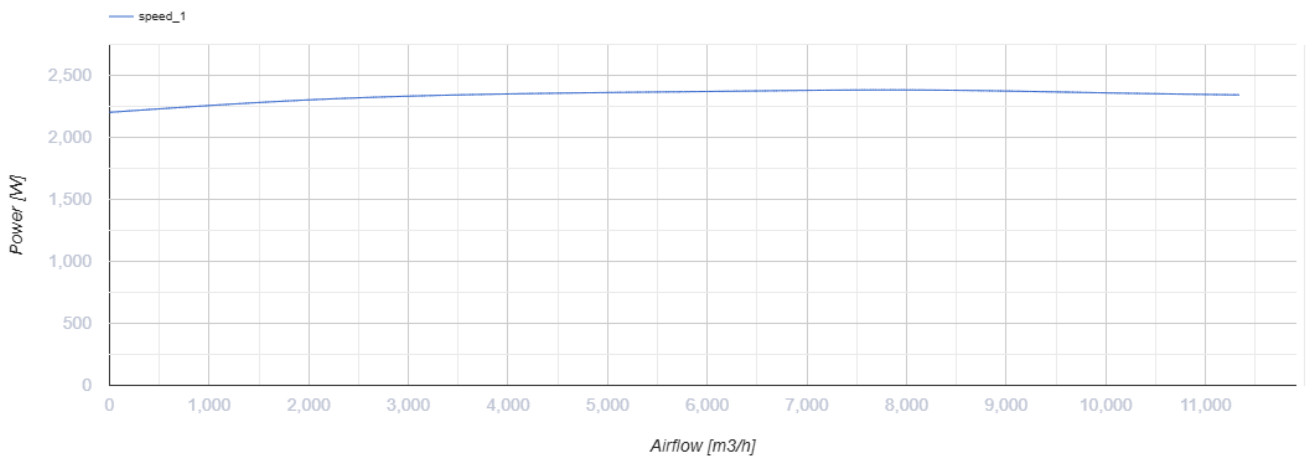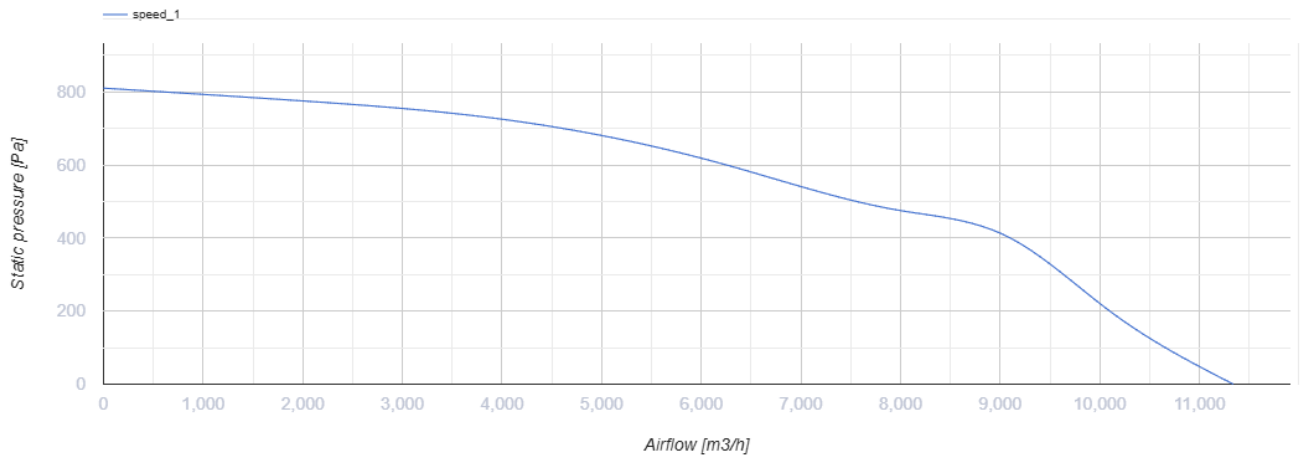

## Dimensions

<b>A</b>
800

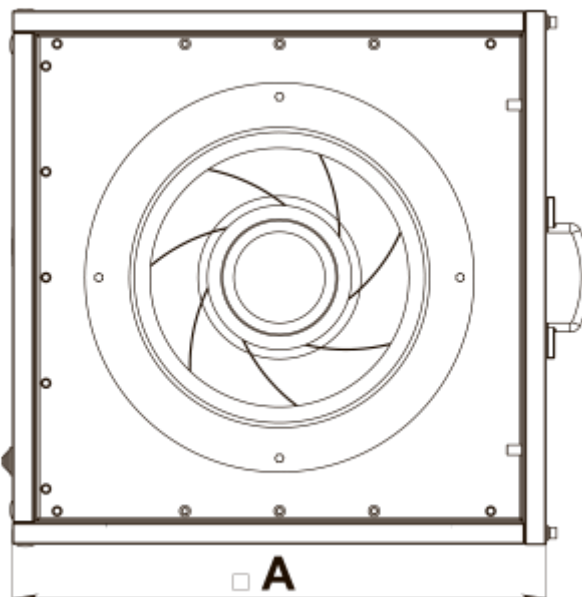

## Ecodesign

Trademark	Vents
Model	VS 560-4D
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m <sup>3</sup> /s)	2.012
Nominal external pressure (Pa)	532
Maximum external leakage rates (%)	2.7
Static efficiency (%)	45.9
Declared typology	NRVU UVU
Effective electric power input (kW)	2.377
Sound power level (dB(A))	76