



VS 710-6D



Centrifugal inline fans in sound-insulated casings


- Maximum airflow: 15830
- Sound pressure level LpA at 3 m: 59
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

| | Unit of measurement | VS 710-6D |
|-----------------------------------|---------------------|-----------|
| Connected air duct size | mm | 710 |
| Speed | - | 1 |
| Minimum supply voltage | V | 400 |
| Maximum supply voltage | V | 400 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 2000 |
| Unit current | A | 3.9 |
| Maximum airflow | m ³ /h | 15830 |
| Sound pressure level LpA at 3 m | dB(A) | 59 |
| Weight | kg | 136 |
| Transported air temperature (max) | °C | 40 |
| Transported air temperature (min) | °C | -20 |
| Ingress protection rating | - | IPX4 |

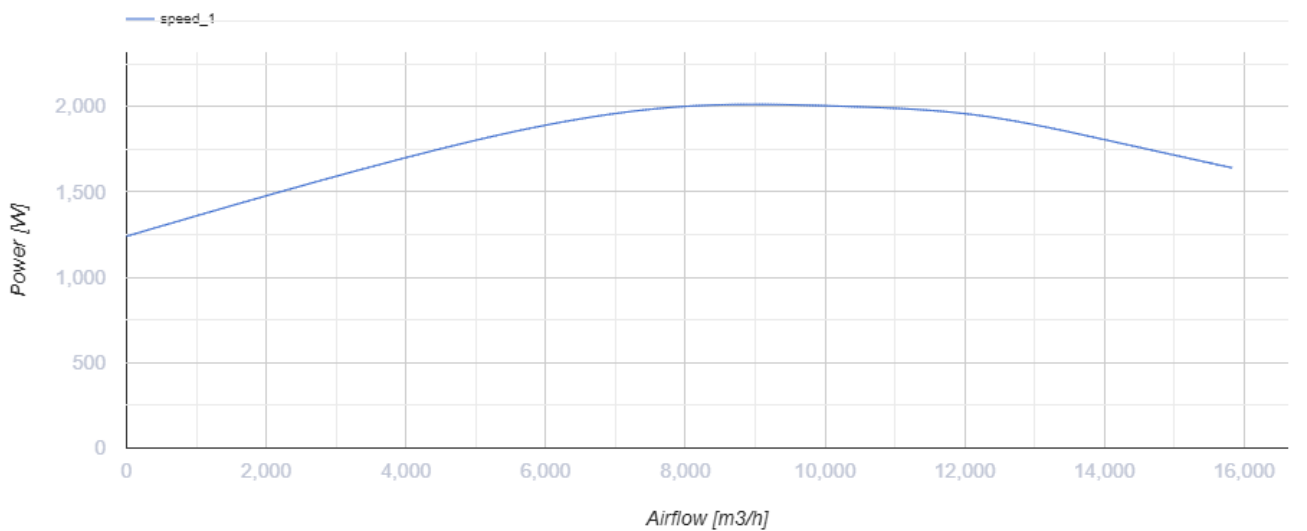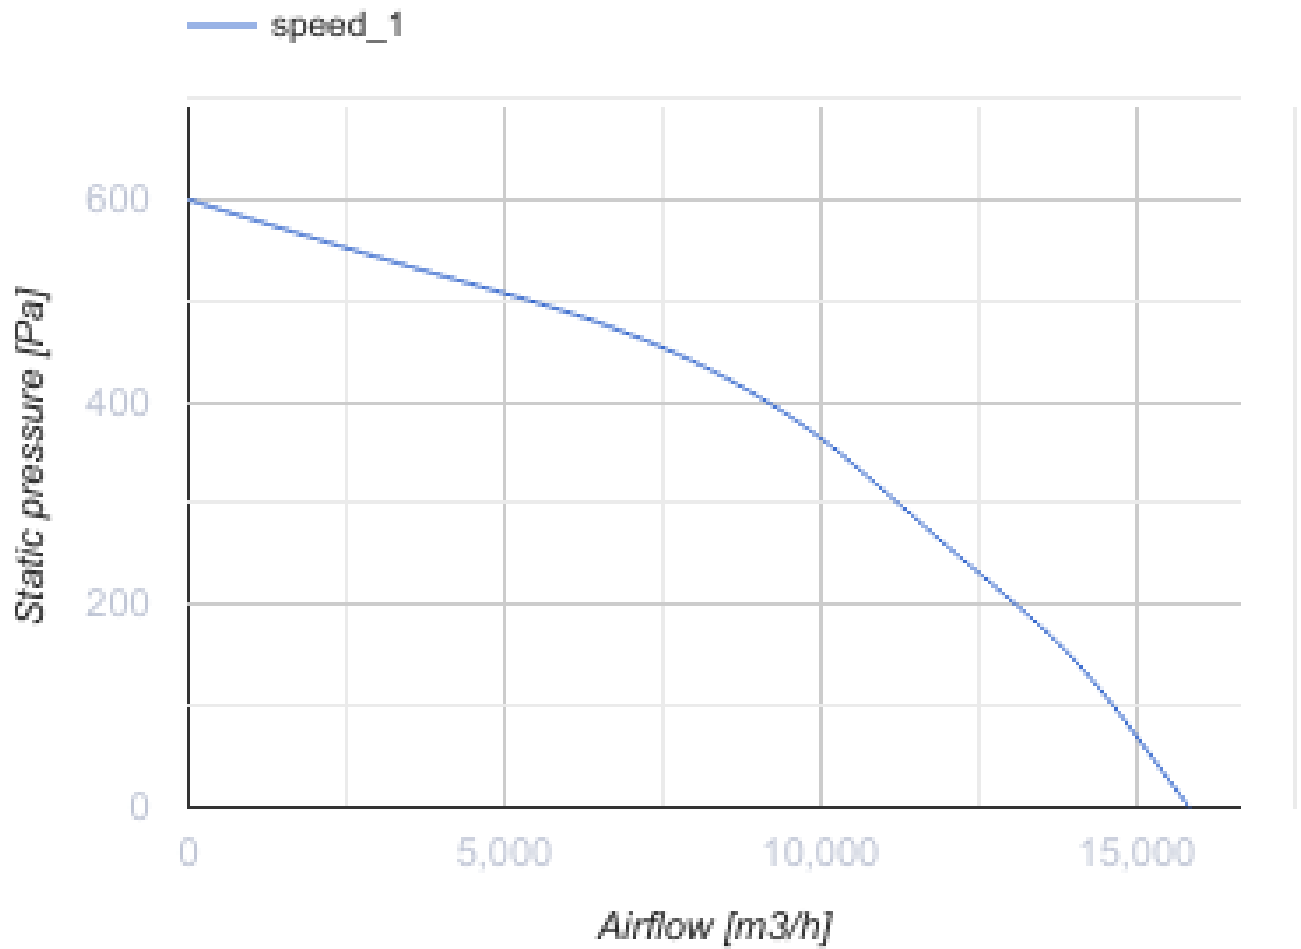

Dimensions

| |
|----------|
| A |
| 1000 |

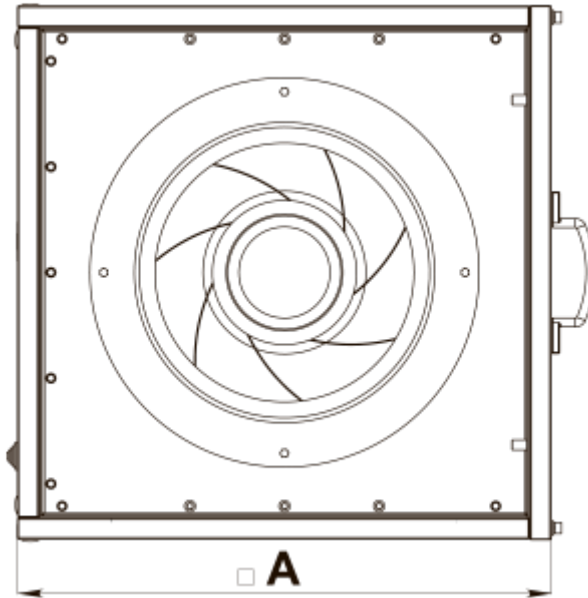

Ecodesign

| Trademark | Vents |
|---------------------------------------|---------------------|
| Model | VS 710-6D |
| Type of drive installed | External MSD or VSD |
| Type of heat recovery system | None |
| Nominal flow rate (m ³ /s) | 2.692 |
| Nominal external pressure (Pa) | 376 |
| Maximum external leakage rates (%) | 2.7 |
| Static efficiency (%) | 50.6 |
| Declared typology | NRVU UVU |
| Effective electric power input (kW) | 2.04 |
| Sound power level (dB(A)) | 79 |