



## VSK 315 2D



Centrifugal kitchen fans in sound-insulated casing

- Maximum airflow: 4460
- Sound pressure level LpA at 3 m: 58
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc
- Installation in any position

|                                   | Unit of measurement | VSK 315 2D |
|-----------------------------------|---------------------|------------|
| Connected air duct size           | mm                  | 315        |
| Speed                             | -                   | 1          |
| Phases                            | -                   | 3          |
| Minimum supply voltage            | V                   | 400        |
| Maximum supply voltage            | V                   | 400        |
| Power supply frequency            | Hz                  | 50         |
| Rated power                       | W                   | 1100       |
| Unit current                      | A                   | 2.4        |
| Maximum airflow                   | m <sup>3</sup> /h   | 4460       |
| rotation speed at 50hz            | -                   | 2885       |
| Sound pressure level LpA at 3 m   | dB(A)               | 58         |
| Weight                            | kg                  | 41         |
| Transported air temperature (max) | °C                  | 120        |
| Transported air temperature (min) | °C                  | -25        |
| Ingress protection rating         | -                   | IPX4       |

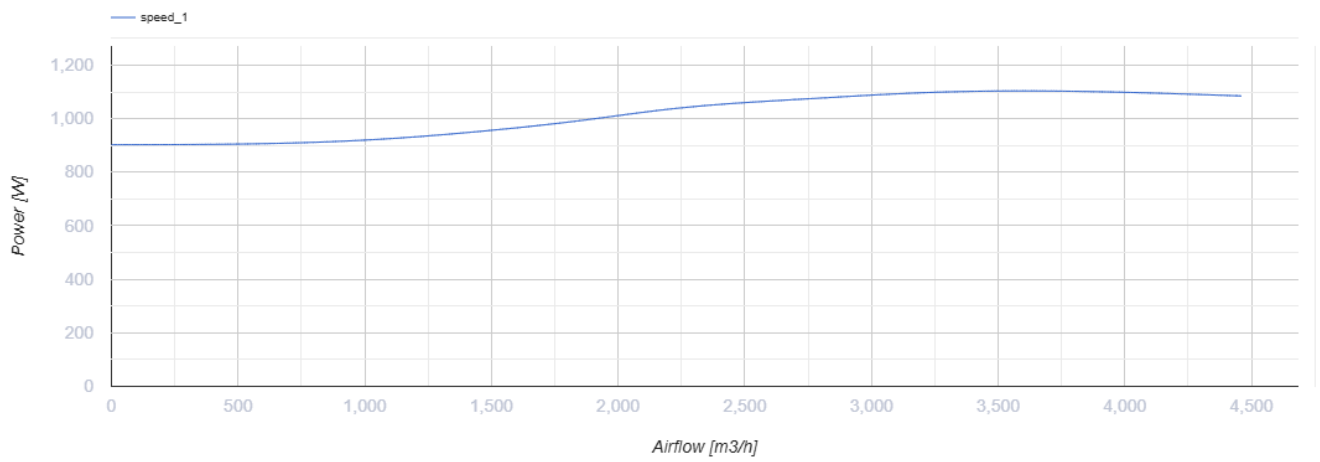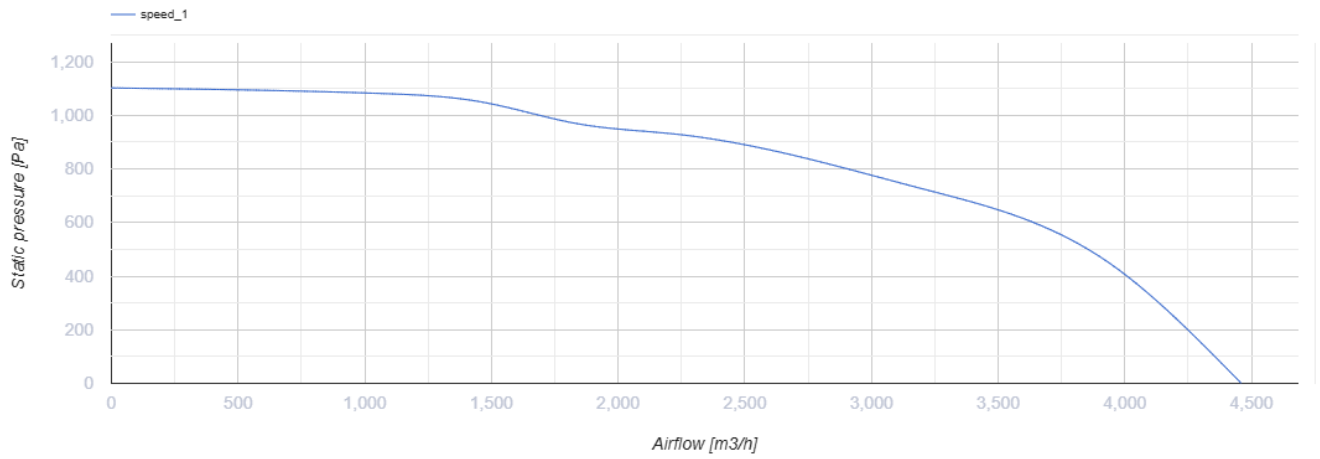

## Dimensions

| L   | L1  | H   | H1  | B   | B1  | A   | C   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 500 | 538 | 500 | 538 | 500 | 538 | 200 | 440 |

