



VSK 315 4D



Centrifugal kitchen fans in sound-insulated casing

- Maximum airflow: 1910
- Sound pressure level LpA at 3 m: 50
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc
- Installation in any position

| | Unit of measurement | VSK 315 4D |
|-----------------------------------|---------------------|------------|
| Connected air duct size | mm | 315 |
| Speed | - | 1 |
| Phases | - | 3 |
| Minimum supply voltage | V | 400 |
| Maximum supply voltage | V | 400 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 250 |
| Unit current | A | 0.7 |
| Maximum airflow | m ³ /h | 1910 |
| rotation speed at 50hz | - | 1385 |
| Sound pressure level LpA at 3 m | dB(A) | 50 |
| Weight | kg | 37.2 |
| Transported air temperature (max) | °C | 120 |
| Transported air temperature (min) | °C | -25 |
| Ingress protection rating | - | IPX4 |

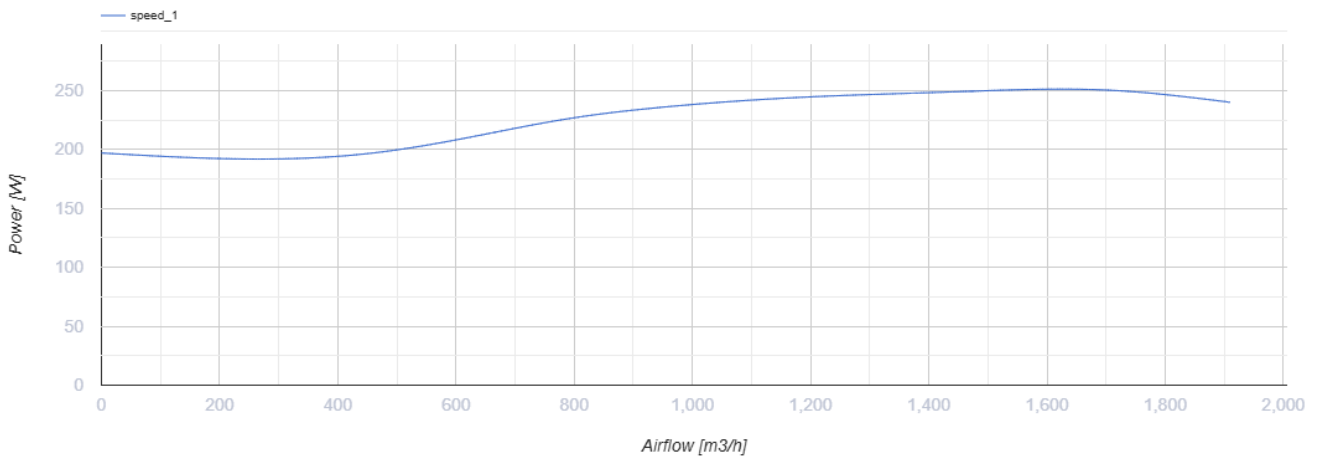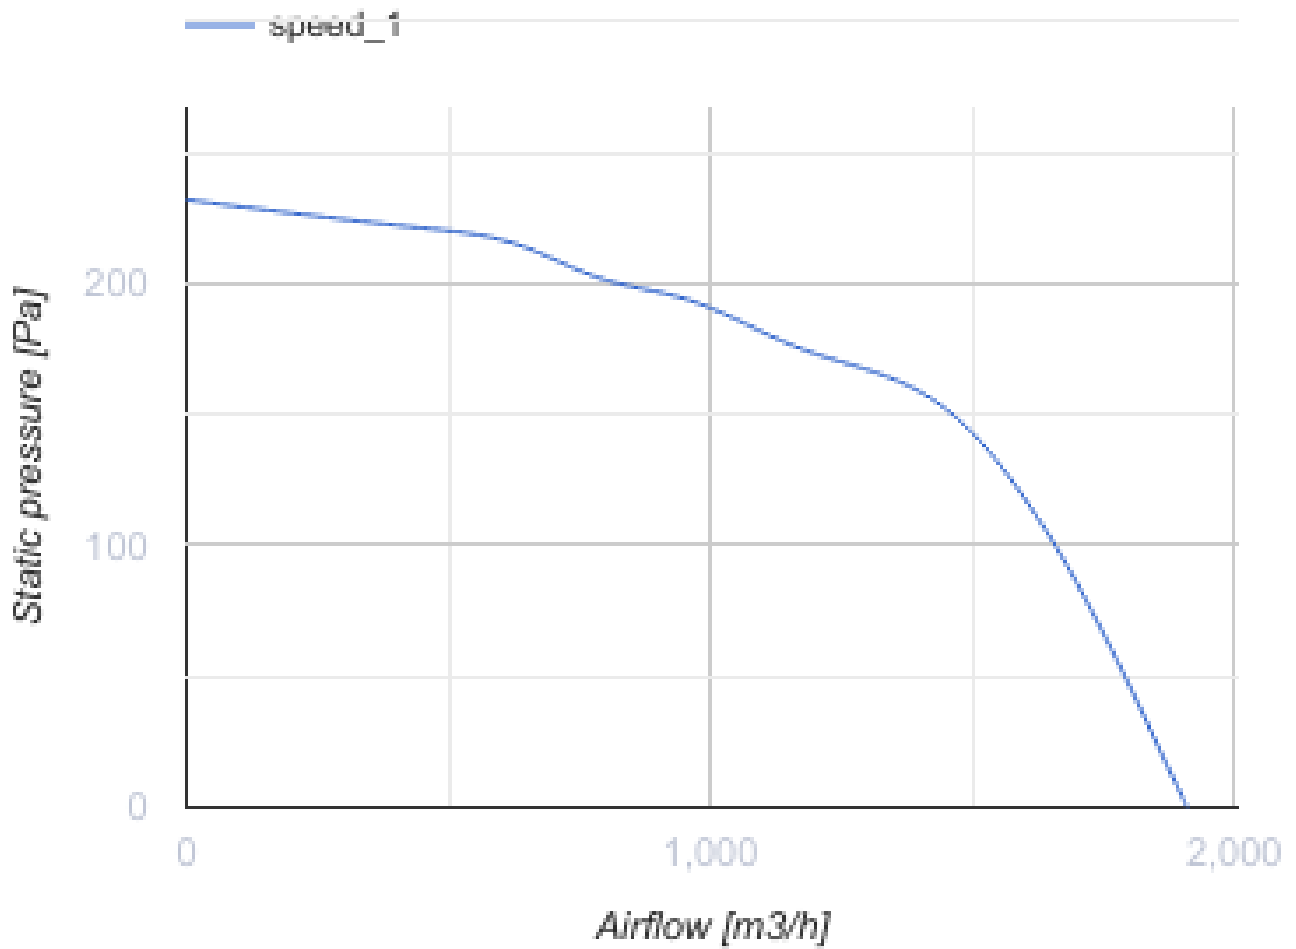

Dimensions

| L | L1 | H | H1 | B | B1 | A | C |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 500 | 538 | 500 | 538 | 500 | 538 | 200 | 440 |

