



VSK 400 4D



Centrifugal kitchen fans in sound-insulated casing

- Maximum airflow: 4550
- Sound pressure level LpA at 3 m: 53
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc
- Installation in any position

| | Unit of measurement | VSK 400 4D |
|-----------------------------------|---------------------|------------|
| Connected air duct size | mm | 400 |
| Speed | - | 1 |
| Phases | - | 3 |
| Minimum supply voltage | V | 400 |
| Maximum supply voltage | V | 400 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 550 |
| Unit current | A | 1.7 |
| Maximum airflow | m ³ /h | 4550 |
| rotation speed at 50hz | - | 1400 |
| Sound pressure level LpA at 3 m | dB(A) | 53 |
| Weight | kg | 58.1 |
| Transported air temperature (max) | °C | 120 |
| Transported air temperature (min) | °C | -25 |
| Ingress protection rating | - | IPX4 |

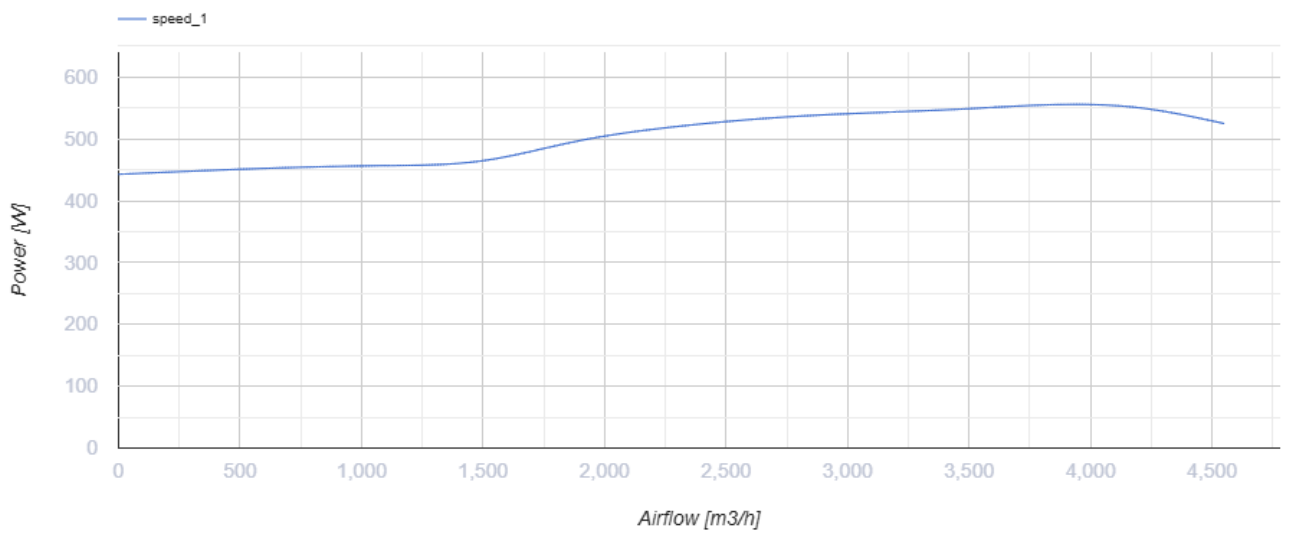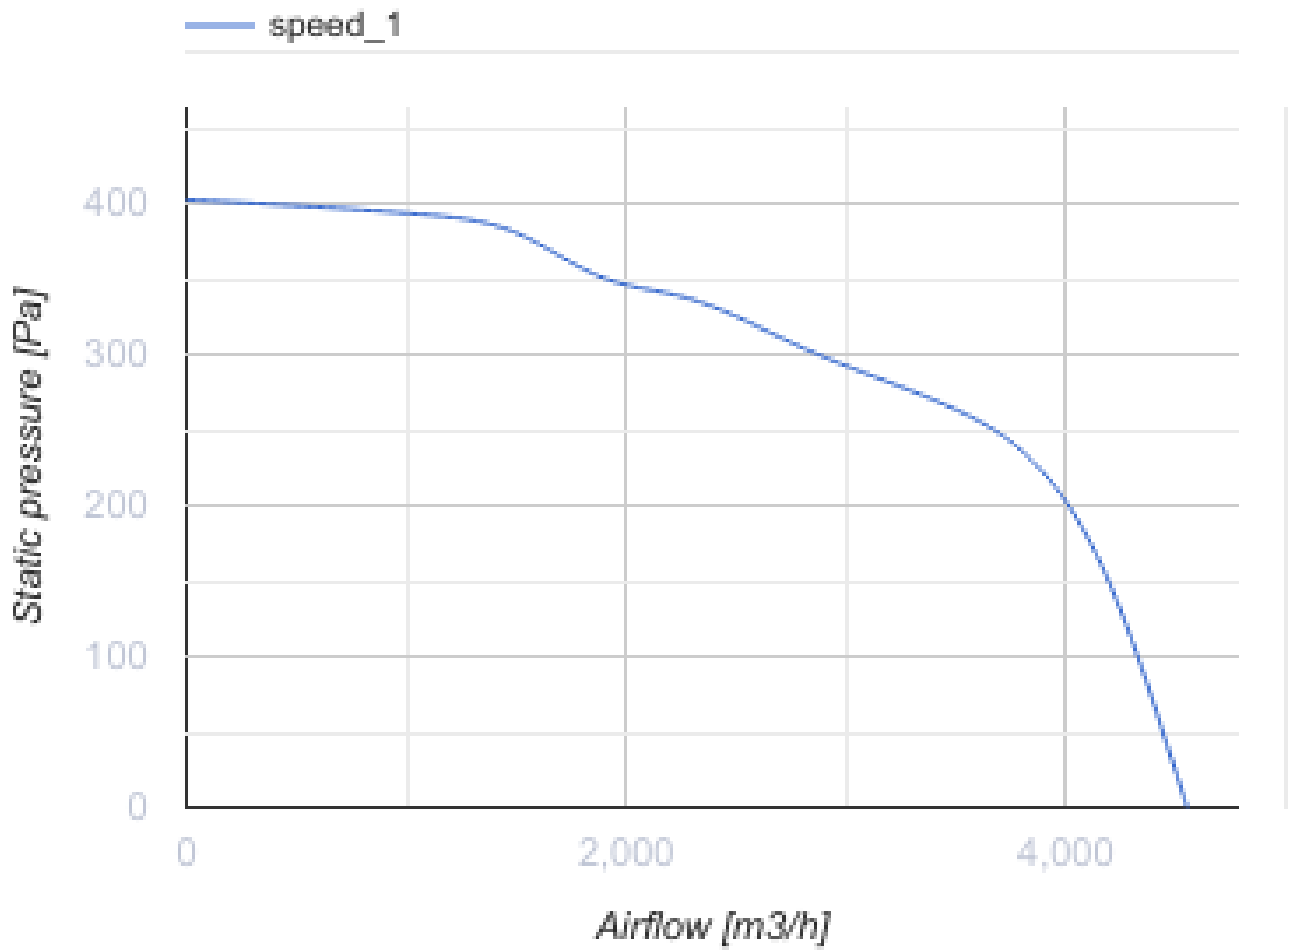

Dimensions

| L | L1 | H | H1 | B | B1 | A | C |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 670 | 708 | 670 | 708 | 670 | 708 | 252 | 610 |

