



## VSK 450 4E



Centrifugal kitchen fans in sound-insulated casing

- Maximum airflow: 5920
- Sound pressure level LpA at 3 m: 54
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc
- Installation in any position

	Unit of measurement	VSK 450 4E
Connected air duct size	mm	450
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	750
Unit current	A	5.6
Maximum airflow	m <sup>3</sup> /h	5920
rotation speed at 50hz	-	1435
Sound pressure level LpA at 3 m	dB(A)	54
Weight	kg	71.8
Transported air temperature (max)	°C	120
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4

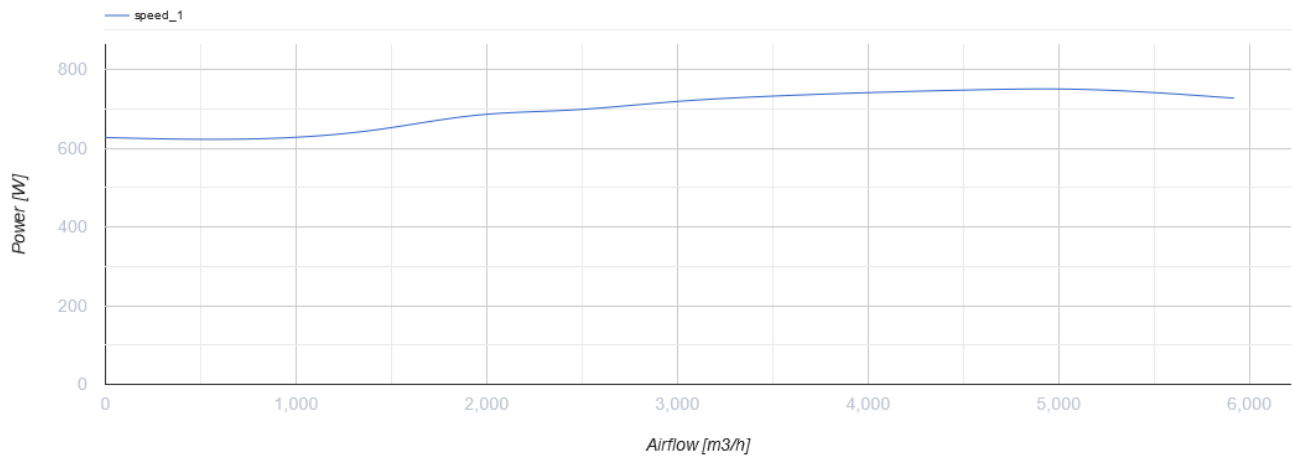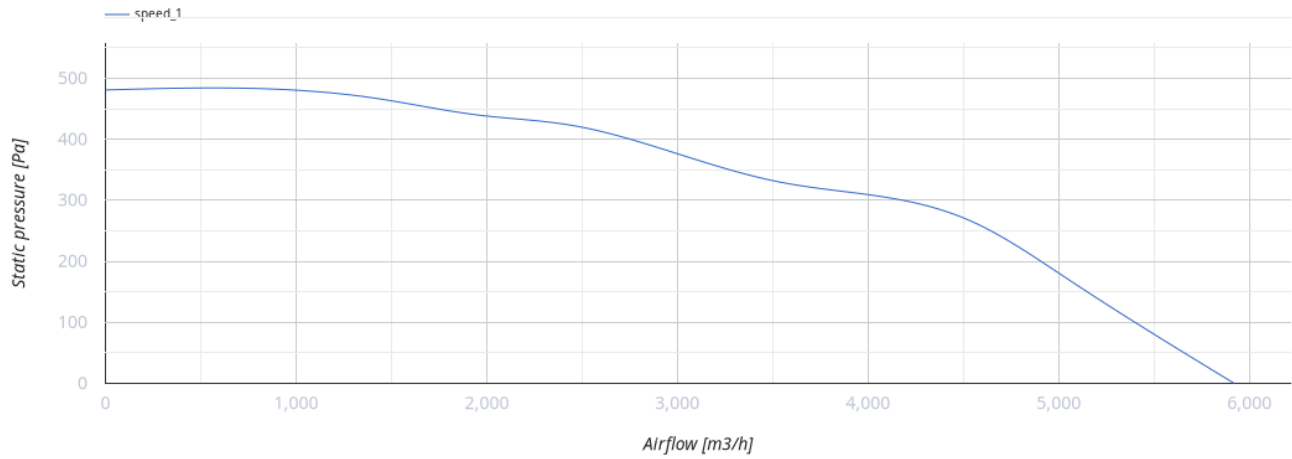

## Dimensions

<b>L</b>	<b>L1</b>	<b>H</b>	<b>H1</b>	<b>B</b>	<b>B1</b>	<b>A</b>	<b>C</b>
700	738	700	738	700	738	282	640

