

VSK 630 D EC

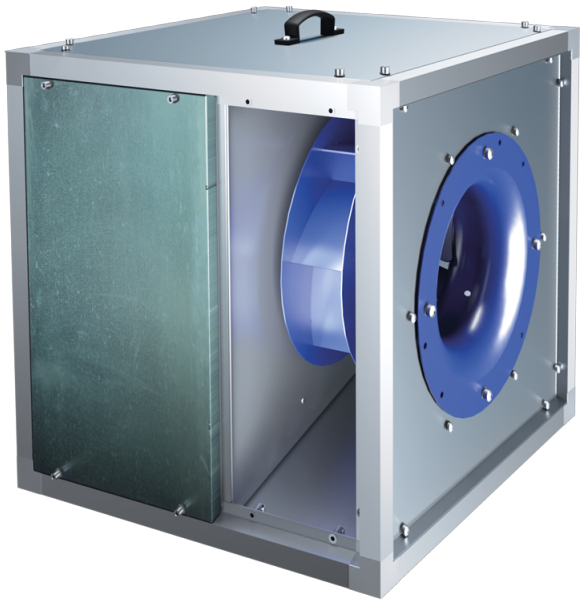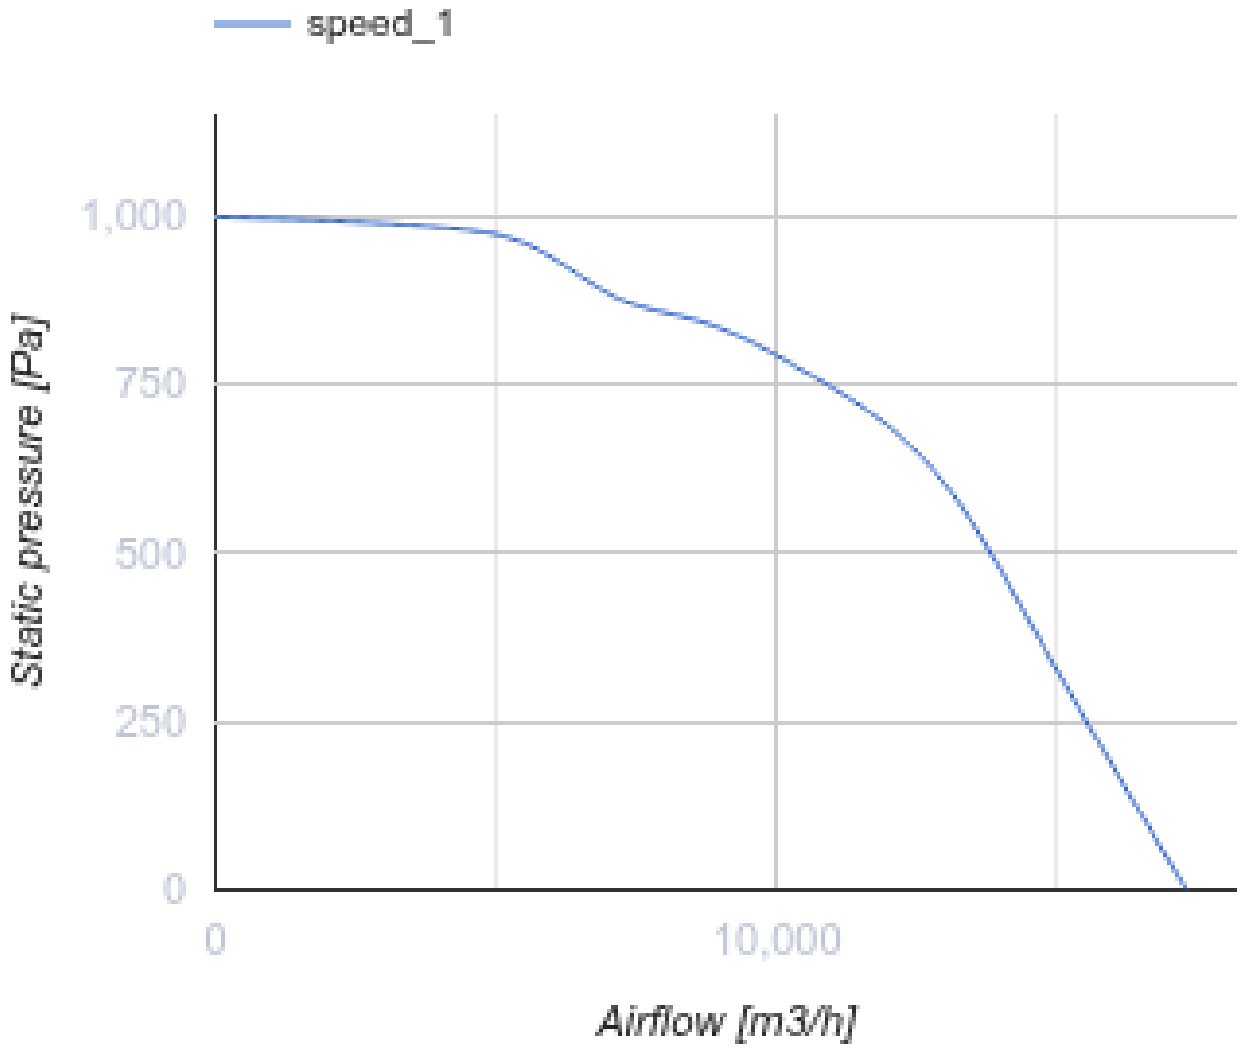


Kitchen inline fans in sound-insulated casing with operational temperature of 120 °C with EC-motors

- Sound pressure level LpA at 3 m: 65
- Sound-insulated casing
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc


	Unit of measurement	VSK 630 D EC
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50/60
Rated power	W	3000
Unit current	A	7.2
Maximum airflow	m³/h	14000
Rotation speed at 50hz	-	1000
Sound pressure level LpA at 3 m	dB(A)	65
Weight	kg	164.5
Transported air temperature (max)	°C	120
Transported air temperature (min)	°C	-25
Maximum transported air temperature	-	120°C CONTINUOUS
Ingress protection rating	-	IPX4
Impeller material	-	Steel
Size	mm	630


speed_1
1,000
750
500
250
0
Static pressure [Pa]
0
10,000
Airflow [m3/h]

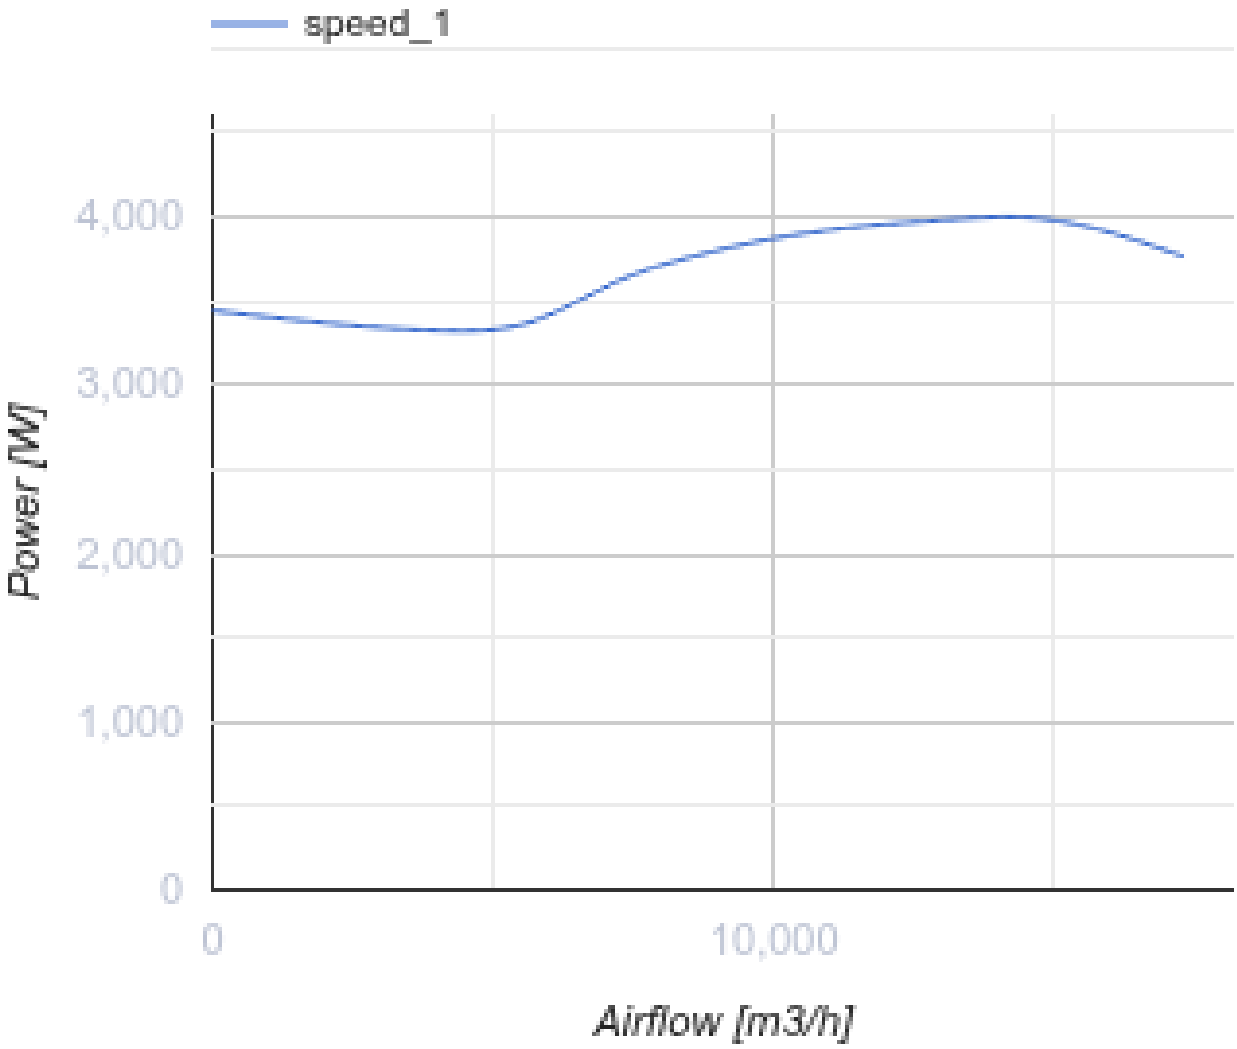

Dimensions

L	L1	H	H1	B	B1	A	C
1000	1038	1000	1038	1000	1038	409	940

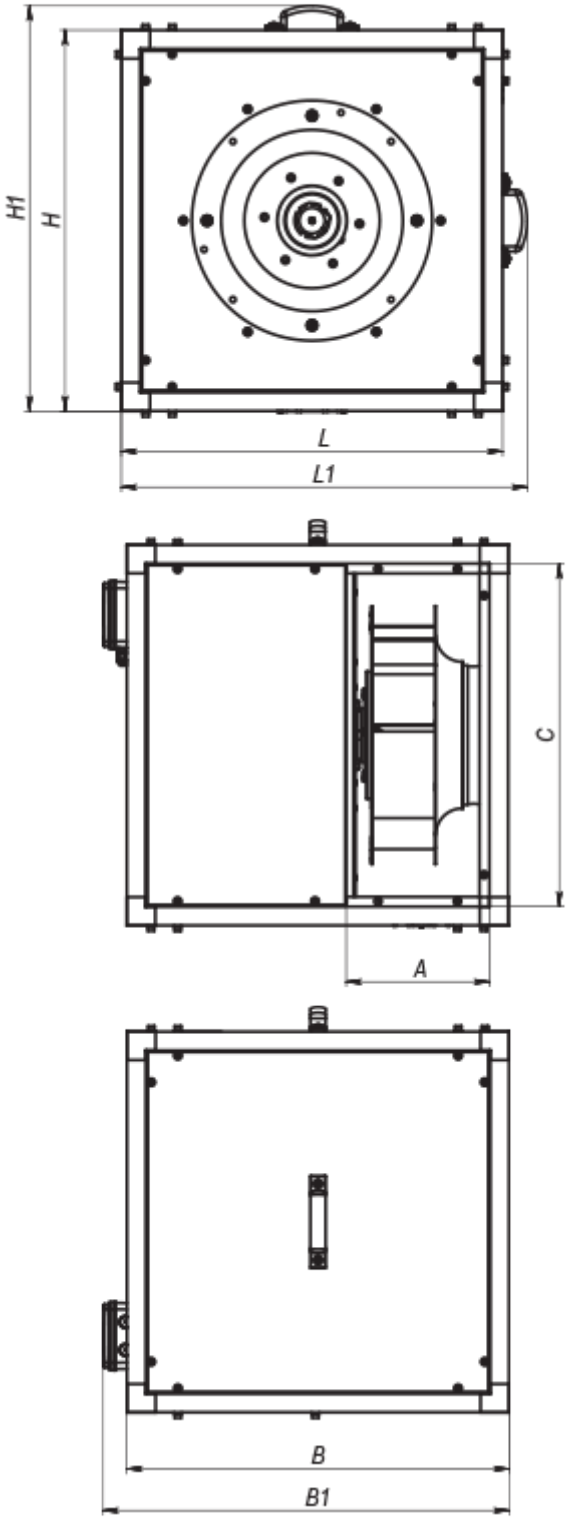

Accessories

Speed controllers for EC motors

Name	Photo	Description

R-1/010		Speed controller for EC motors