# VSK 710 6D (400/60)

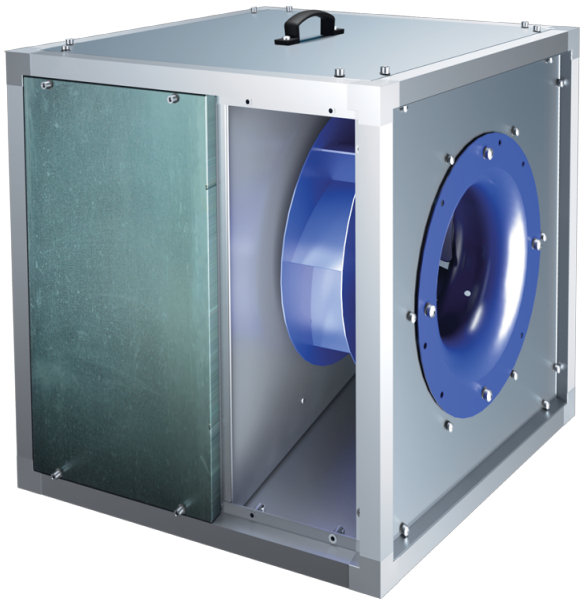

Centrifugal kitchen inline fans in sound-insulated casing with operational temperature of 120 °C

- Sound-insulated casing
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc
- Installation in any position

| | Unit of measurement | VSK 710 6D (400/60) |
|---|---|---|
| Phases | - | 3 |
| Minimum supply voltage | V | 400 |
| Maximum supply voltage | V | 400 |
| Power supply frequency | Hz | 60 |
| Weight | kg | 240 |
| Transported air temperature (max) | °C | 120 |
| Transported air temperature (min) | °C | -25 |
| Maximum transported air temperature | - | 120°C CONTINUOUS |
| Ingress protection rating | - | IPX4 |
| Impeller material | - | Steel |

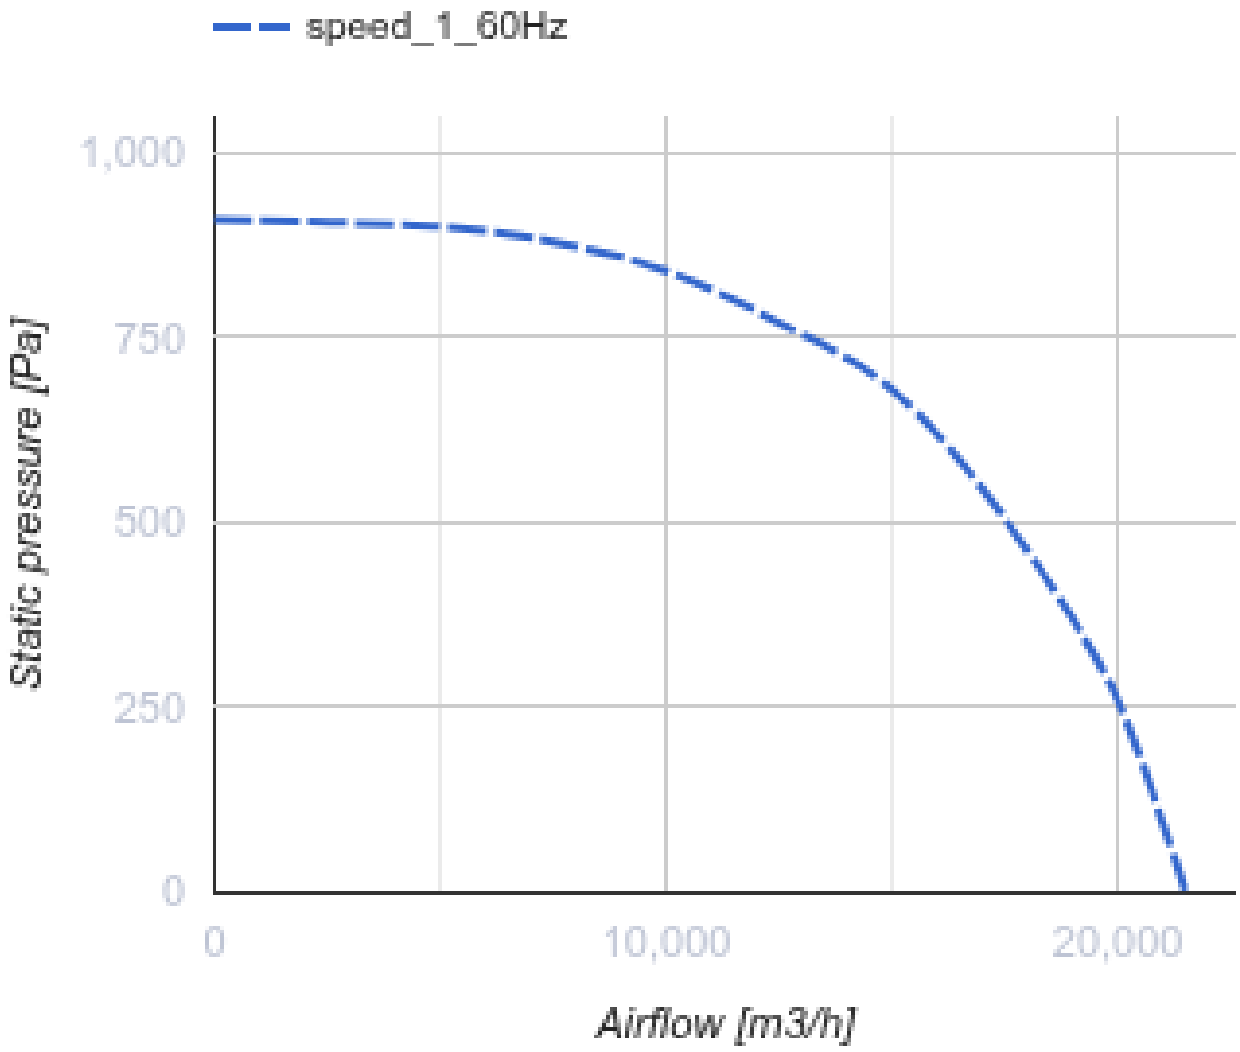


## Dimensions

| L | L1 | H | H1 | B | B1 | A | C |
|---|---|---|---|---|---|---|---|
| 1075 | 1152 | 1075 | 1114 | 1075 | 1112 | 455 | 1015 |

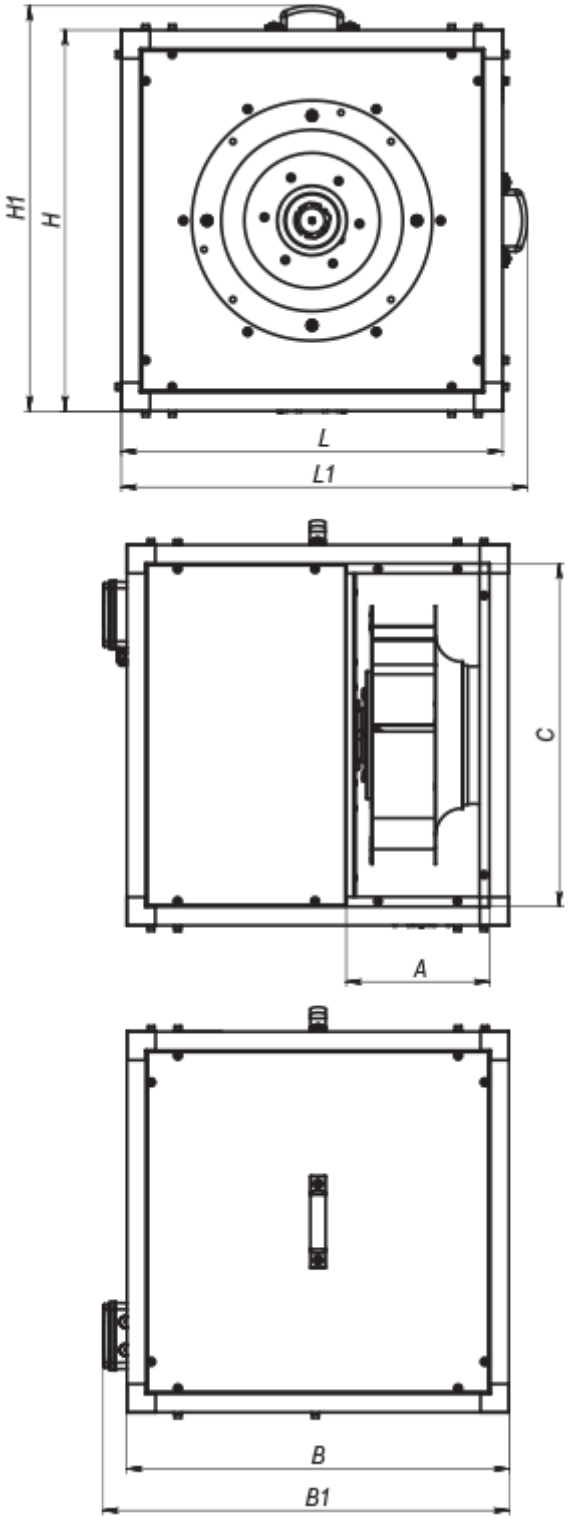


## Accessories

### Transformer speed controllers

| Name | Photo | Description |
|---|---|---|
| RSA5E-2-M |  | Speed controls enable selection of the ventilation mode for periodically occupied premises |

| | | |
|---|---|---|
| RSA5E-3-M |  | Speed controls enable selection of the ventilation mode for periodically occupied premises |
| RSA5E-4-M |  | Speed controls enable selection of the ventilation mode for periodically occupied premises |
| RSA5E-10-M |  | Speed controls enable selection of the ventilation mode for periodically occupied premises |
| RSA5E-13-M |  | Speed controls enable selection of the ventilation mode for periodically occupied premises |
| RSA5E-3,5-T |  | Speed controllers are applied for air flow control of single phase fans by means of motor step speed control |
| RSA5E-5,0-T |  | Speed controllers are applied for air flow control of single phase fans by means of motor step speed control |
| RSA5E-7,5-T |  | Speed controllers are applied for air flow control of single phase fans by means of motor step speed control |
| RSA5D-1,5-M |  | Three phase speed controller |
| RSA5D-6,0-M |  | Three phase speed controller |
| RSA5D-8,0-M |  | Three phase speed controller |
| RSA5D-11,0-M |  | Three phase speed controller |