


VSK 800 6D (400/60)

Centrifugal kitchen inline fans in sound-insulated casings with operational temperature of 120 °C

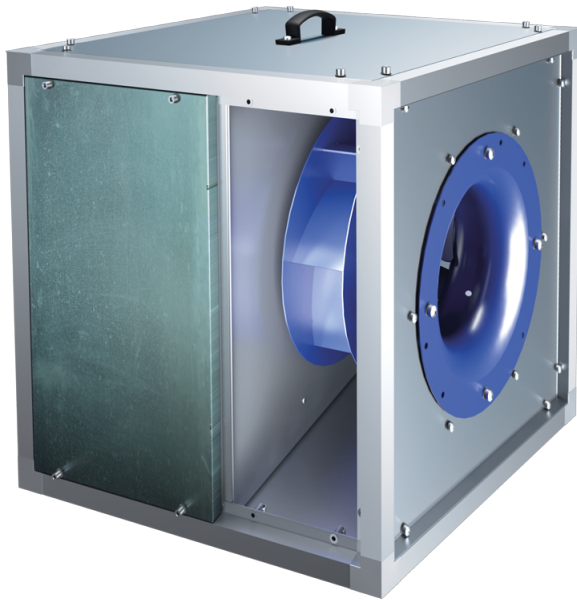


- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Aluzinc
- Installation in any position

	Unit of measurement	VSK 800 6D (400/60)
Connected air duct size	mm	800
Speed	-	1
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	60
Rated power	W	
Unit current	A	
Maximum airflow	m ³ /h	
rotation speed at 50hz	-	
Sound pressure level LpA at 3 m	dB(A)	
Weight	kg	275
Transported air temperature (max)	°C	120
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4

Dimensions



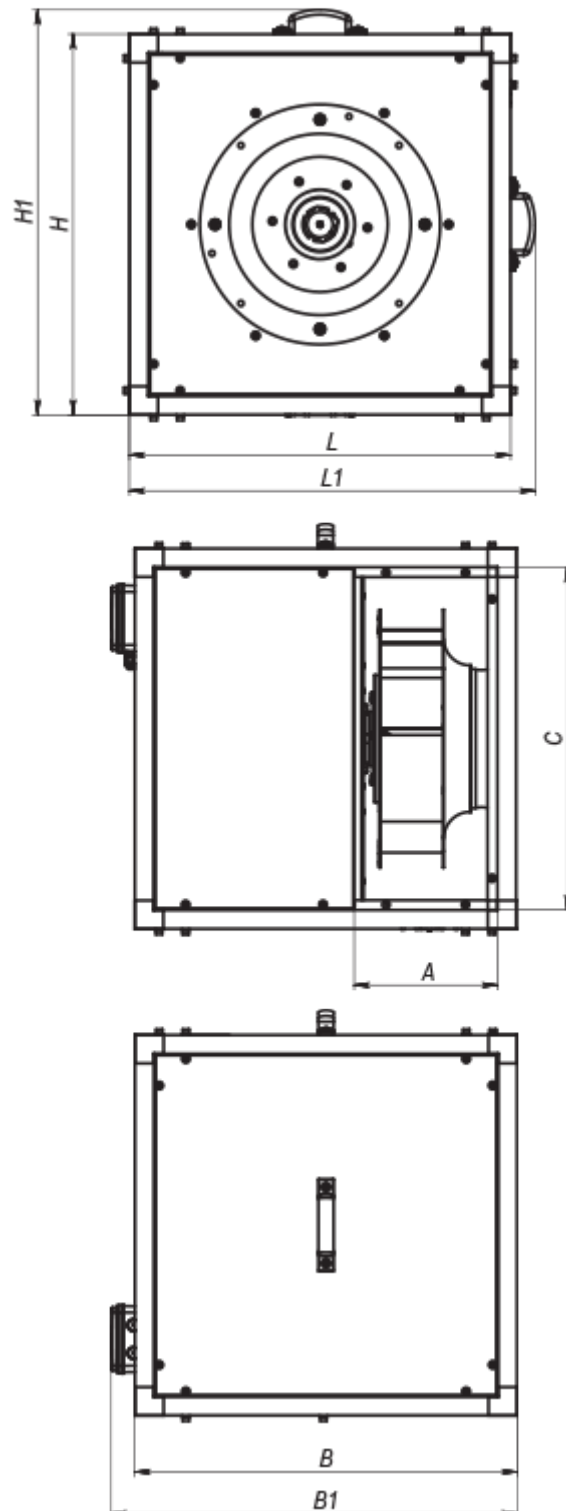












L	L1	H	H1	B	B1	A	C
1175	1252	1175	1214	1175	1212	505	1115



Accessories

Speed controllers

Name	Photo	Description
------	-------	-------------

RSA5D-12,0-M		Three phase speed controller
RSA5D-11,0-M		Three phase speed controller
RSA5D-8,0-M		Three phase speed controller
RSA5D-6,0-M		Three phase speed controller
RSA5D-2,5-M		Three phase speed controller
RSA5D-1,5-M		Three phase speed controller
RSA5D-3,5-T		Three phase speed controller
RSA5D-1,5-T		Three phase speed controller
RSA5E-7,5-T		Speed controllers are applied for air flow control of single phase fans by means of motor step speed control
RSA5E-5,0-T		Speed controllers are applied for air flow control of single phase fans by means of motor step speed control
RSA5E-3,5-T		Speed controllers are applied for air flow control of single phase fans by means of motor step speed control
RSA5E-13-M		Speed controls enables not only selecting the comfortable ventilation mode for the periodically visited premises but reducing the energy consumption for the ventilation
RSA5E-10-M		Speed controls enables not only selecting the comfortable ventilation mode for the periodically visited premises but reducing the energy consumption for the ventilation
RSA5E-4-M		Speed controls enables not only selecting the comfortable ventilation mode for the periodically visited premises but reducing the energy consumption for the ventilation
RSA5E-3-M		Speed controls enables not only selecting the comfortable ventilation mode for the periodically visited premises but reducing the energy consumption for the ventilation

[RSA5E-2-M](#)



Speed controls enables not only selecting the comfortable ventilation mode for the periodically visited premises but reducing the energy consumption for the ventilation