


VUE 300 P3 R A4

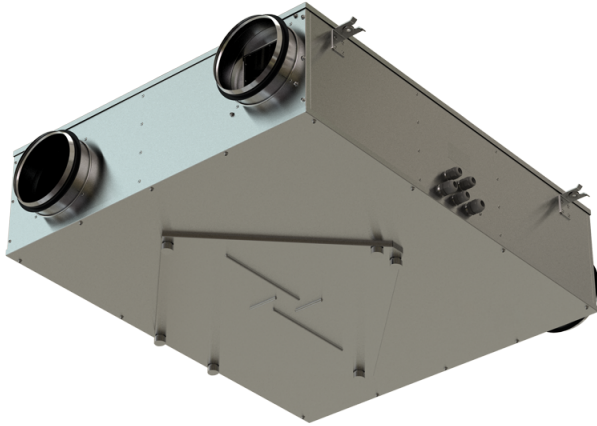

Heat recovery air handling units in heat- and sound-insulated casing


- Maximum airflow: 340
- Sound pressure level LpA at 3 m: 52
- Heat exchanger type: Cross flow
- Extract filter: G4
- Supply filter: G4 and F8 (PM2.5 93%)
- Sound insulation
- Motor type: AC
- Enthalpy heat exchanger
- Control: Remote Control
- Casing material: Coated steel

| | Unit of measurement | VUE 300 P3 R A4 |
|-----------------------------------|---------------------|-----------------------|
| Connected air duct size | mm | 150 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 193 |
| Unit current | A | 0.84 |
| Maximum airflow | m ³ /h | 340 |
| Sound pressure level LpA at 3 m | dB(A) | 52 |
| Heat recovery efficiency, max | % | 87 |
| Heat exchanger type | - | Cross flow |
| Heat exchanger material | - | Enthalpy |
| Weight | kg | 27 |
| Extract filter | - | G4 |
| Supply filter | - | G4 and F8 (PM2.5 93%) |
| Transported air temperature (max) | °C | 40 |
| Transported air temperature (min) | °C | -15 |
| Ambient air temperature min | °C | 0 |
| Ambient air temperature max | °C | 40 |
| Ambient air humidity max | % | 60 |
| Ingress protection rating | - | IP22 |

| | | |
|--|---|------|
| Ingress protection rating of the drive | - | IP44 |
|--|---|------|



Dimensions
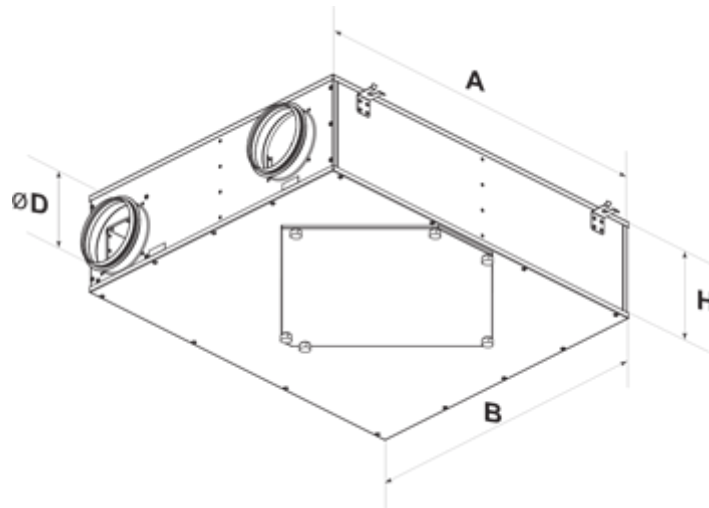
| ØD | A | B | H |
|-----|-----|-----|-----|
| 150 | 854 | 704 | 227 |



Accessories

Other accessories

| Name | Photo | Description |
|------------------|---|-----------------|
| SF 300x220x48 G4 |  | Panel filter G4 |
| SF 300x220x48 F8 |  | F8 panel filter |

Speed control switches

| Name | Photo | Description |
|-----------------------|---|---------------------|
| SP3-1 |  | Sensor speed switch |