


VUE 350 V1B EC A14



Air handling units in heat- and sound-insulated casing equipped with a counter-flow enthalpy heat exchanger


- Maximum airflow: 420
- Sound pressure level LpA at 3 m: 28
- Heat exchanger type: Counter flow
- Extract filter: G4
- Supply filter: F7 (G4 optional)
- Sound insulation
- Motor type: EC
- Enthalpy heat exchanger
- Bypass: Manual
- Control: Remote Control
- Casing material: Polypropylene/Thermoplastic elastomer
- Humidity sensor: Optional
- CO2 sensor: Optional
- VOC sensor: Optional
- PM2.5 sensor: Optional

| | Unit of measurement | VUE 350 V1B EC A14 |
|-----------------------------------|---------------------|--------------------|
| Connected air duct size | mm | 160 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 169 |
| Unit current | A | 1.3 |
| Maximum airflow | m ³ /h | 420 |
| Sound pressure level LpA at 3 m | dB(A) | 28 |
| Heat recovery efficiency, max | % | 91 |
| Heat exchanger type | - | Counter flow |
| Heat exchanger material | - | Enthalpy |
| Weight | kg | 57 |
| Extract filter | - | G4 |
| Supply filter | - | F7 (G4 optional) |
| Transported air temperature (max) | °C | 40 |
| Transported air temperature (min) | °C | -25 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 40 |
| Ambient air humidity max | % | 60 |
| Ingress protection rating | - | IP20 |

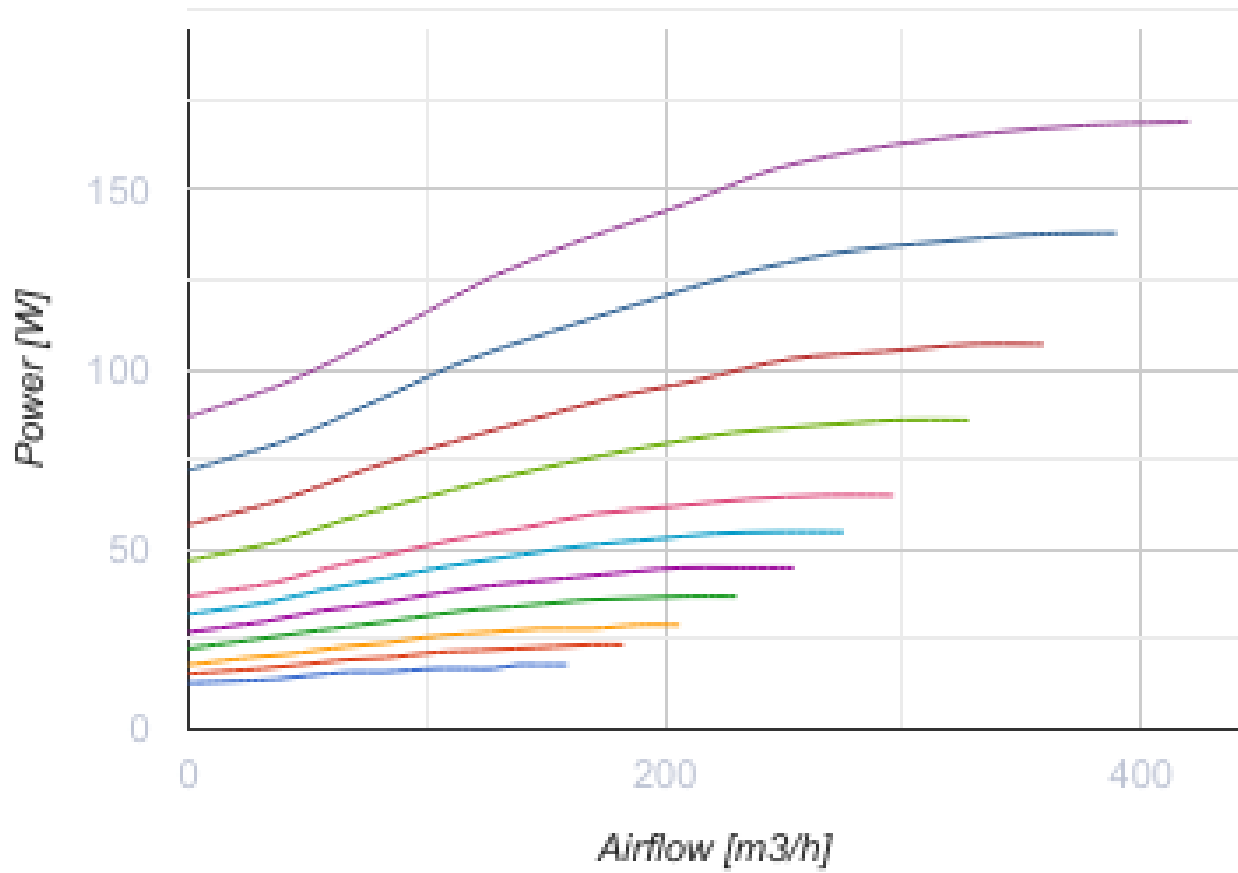



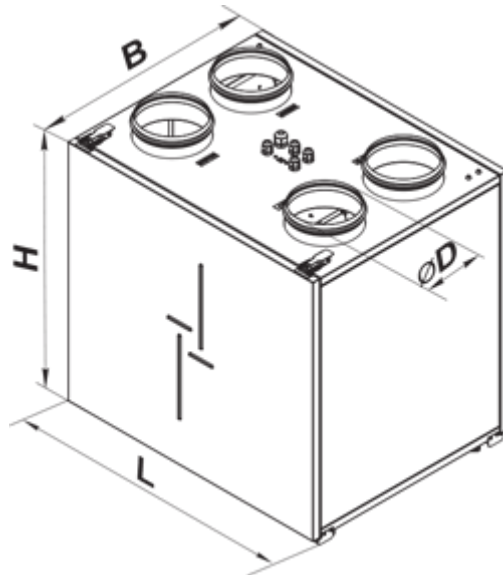

Dimensions

| ØD | B | H | L |
|-----|-----|-----|-----|
| 160 | 470 | 675 | 730 |



Accessories


Sensors

| Name | Photo | Description |
|-----------------------|---|--------------------------------|
| HV2 |  | Humidity sensor |
| CO2-1 |  | CO2 sensors |
| CO2-2 |  | CO2 sensors |
| HR-S |  | Electro-mechanical humidistats |



For round ducts

| Name | Photo | Description |
|-------------------------|---|--|
| KRV 160 |  | Air damper for air flow cut-off in round air ducts |


Electric actuators

| Name | Photo | Description |
|------------------------------|---|---|
| Belimo LF230 |  | The Belimo LF series actuators are designed for controlling air dampers with cross section up to 0.8 m ² performing protection functions |


Other accessories

| Name | Photo | Description |
|------------------|---|-----------------|
| SF 384x196x40 G4 |  | Panel filter G4 |
| SF 384x196x40 F7 |  | F7 panel filter |

Flanges

| Name | Photo | Description |
|----------------------|---|--|
| KH-1 |  | The kitchen exhaust hood is designed to clean air from combustion products, fumes, odors that form during cooking in the kitchen |

Ecodesign

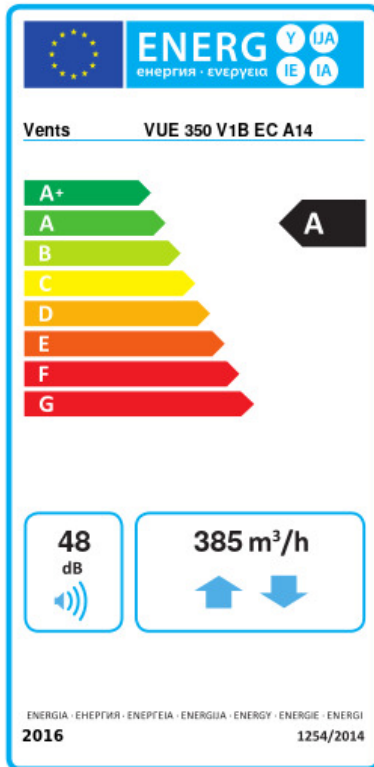

| | | | | | | |
|---|----------------------|----|---------|---|-------|---|
| Trademark | Vents | | | | | |
| Model | VUE 350 V1B EC A14 | | | | | |
| Specific energy consumption (SEC) (kWh/(m ² /a)) | Cold | | Average | | Warm | |
| | -77.2 | A+ | -40.5 | A | -16.8 | E |
| Type of ventilation unit | Bidirectional | | | | | |
| Type of drive installed | Variable speed | | | | | |
| Type of heat recovery system | Recuperative | | | | | |
| Thermal efficiency of heat recovery (%) | 76 | | | | | |
| Maximum flow rate (m ³ /h) | 385 | | | | | |
| Electric power input (W) | 168 | | | | | |
| Reference flow rate (m ³ /s) | 0.076 | | | | | |
| Reference pressure difference (Pa) | 50 | | | | | |
| Specific power input (SPI) (W/(m ³ /h)) | 0.236 | | | | | |
| Control typology | Local demand control | | | | | |
| Maximum internal leakage rates (%) | 2.7 | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Declared typology | RVU BVU | | | | | |
| Sound power level (dB(A)) | 48 | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 707 | | 170 | | 125 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 8614 | | 4403 | | 1991 | |