

# VUT 1500 PB EC



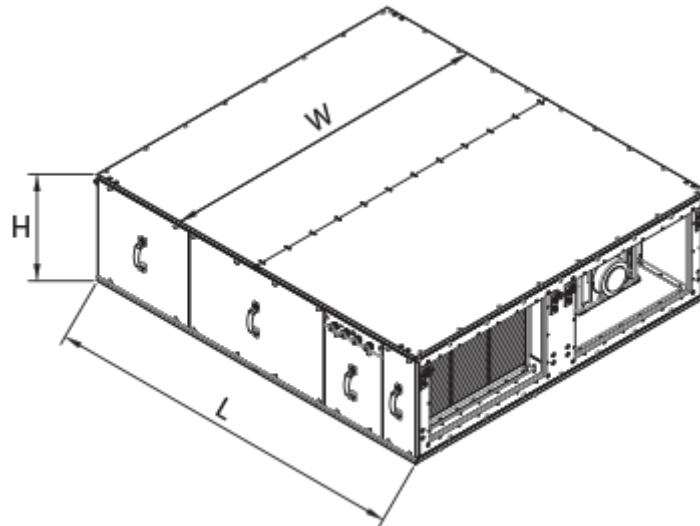
Premium commercial suspended air handling units with a counterflow polystyrene heat exchanger

- Maximum airflow: 1900
- Sound pressure level LpA at 3 m: 29
- Heat exchanger type: Counter flow
- Extract filter: G4 (F7 optional)
- Supply filter: G4 (F7 optional)
- Motor type: EC
- Casing material: Aluzinc

	Unit of measurement	VUT 1500 PB EC
Connected air duct size	mm	600x350
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	920
Unit current	A	4
Maximum airflow	m <sup>3</sup> /h	1900
Sound pressure level LpA at 3 m	dB(A)	29
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	215
Extract filter	-	G4 (F7 optional)
Supply filter	-	G4 (F7 optional)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25




## Dimensions

L	W	H
1646	1500	480



## Accessories

### Control Panels for AHU

Name	Photo	Description
<a href="#">A22</a>		Control panels for controlling industrial and residential air handling units
<a href="#">A22 WiFi</a>		Control panels for controlling industrial and residential air handling units
<a href="#">A25</a>		Touch screen control panel for controlling industrial and residential air handling units

### Airflow regulators

Name	Photo	Description
<a href="#">RRV 600x350</a>		Air flow controllers

### Differential pressure switch

Name	Photo	Description
------	-------	-------------

<a href="#">DTV 500</a>		Pressostat
-------------------------	---	------------

**For rectangular ducts**

Name	Photo	Description
<a href="#">VVG 600x350</a>		Flexible anti-vibration inserts for round air ducts

**For rectangular ducts**

Name	Photo	Description
<a href="#">SR 600x350</a>		Plate silencer for installation in rectangular ducts