

VUT 250 VBE EC L A21




Air handling units in heat- and sound-insulated casing equipped with a counter-flow polystyrene heat exchanger

- Power of electrical preheater: 1400
- Maximum airflow: 390
- Sound pressure level LpA at 3 m: 35
- Heat exchanger type: Counter flow
- Extract filter: G4
- Supply filter: G4 (F7 -Option)
- Sound insulation
- Motor type: EC
- Bypass: Auto
- Reheater: Optional
- Preheater: Built-in
- BMS protocol: ModBus
- Control: Smartphone
- Casing material: Polypropylene/Thermoplastic elastomer
- Humidity sensor: Optional
- CO2 sensor: Optional
- VOC sensor: Optional
- PM2.5 sensor: Optional


| | Unit of measurement | VUT 250 VBE EC L A21 |
|-----------------------------------|---------------------|----------------------|
| Connected air duct size | mm | 160 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 180 |
| Power of electrical preheater | W | 1400 |
| Unit current | A | 7.46 |
| Maximum airflow | m ³ /h | 390 |
| Sound pressure level LpA at 3 m | dB(A) | 35 |
| Heat recovery efficiency, max | % | 95 |
| Heat exchanger type | - | Counter flow |
| Heat exchanger material | - | Polystyrene |
| Weight | kg | 66 |
| Extract filter | - | G4 |
| Supply filter | - | G4 (F7 -Option) |
| Transported air temperature (max) | °C | 40 |
| Transported air temperature (min) | °C | -25 |
| Ambient air temperature min | °C | 1 |

| | | |
|--|----|------|
| Ambient air temperature max | °C | 40 |
| Ambient air humidity max | % | 60 |
| Ingress protection rating | - | IP20 |
| Ingress protection rating of the drive | - | IP44 |

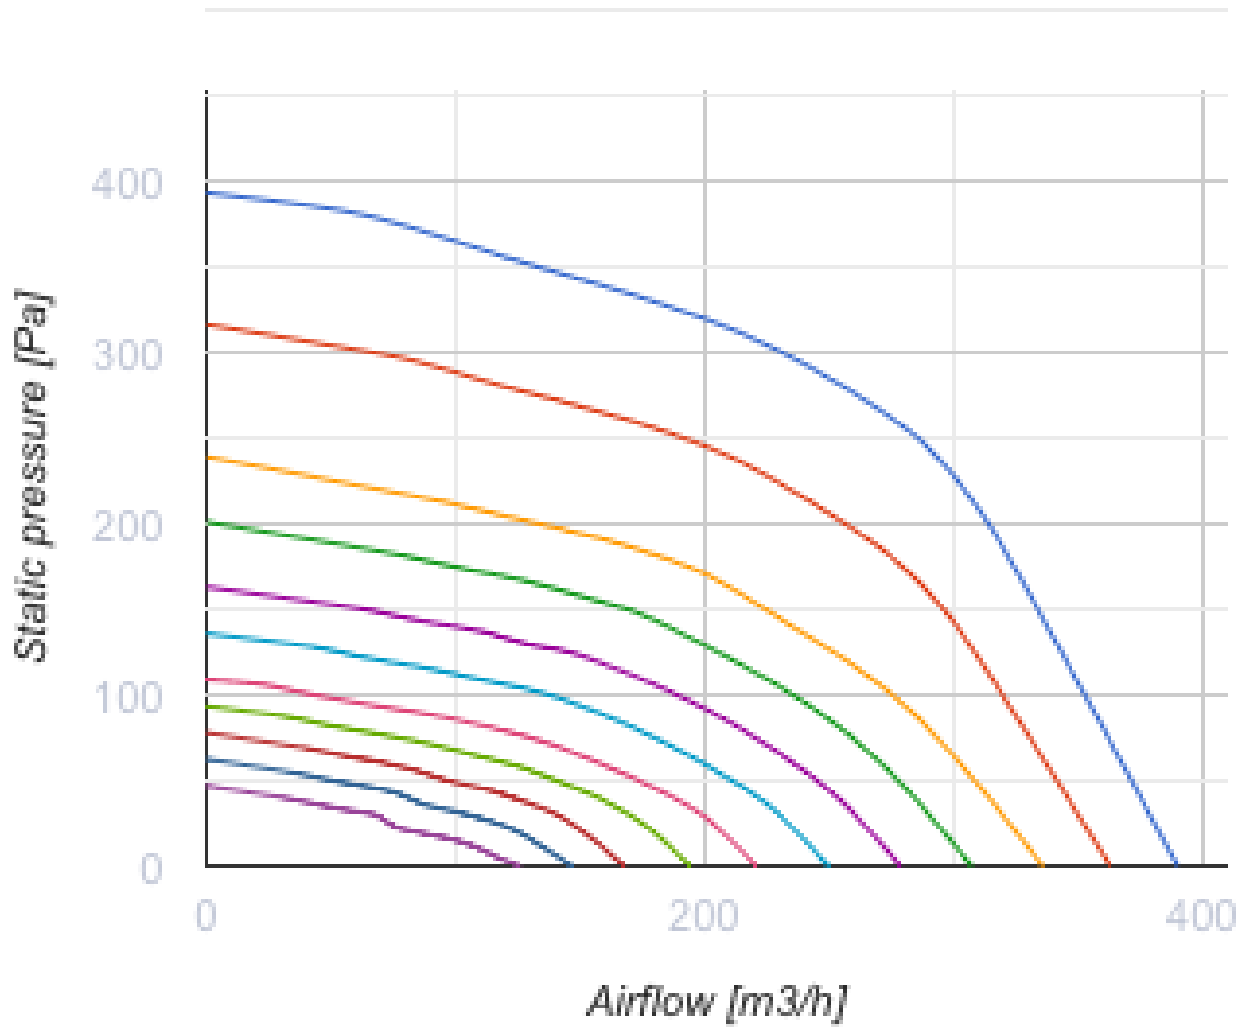




Dimensions
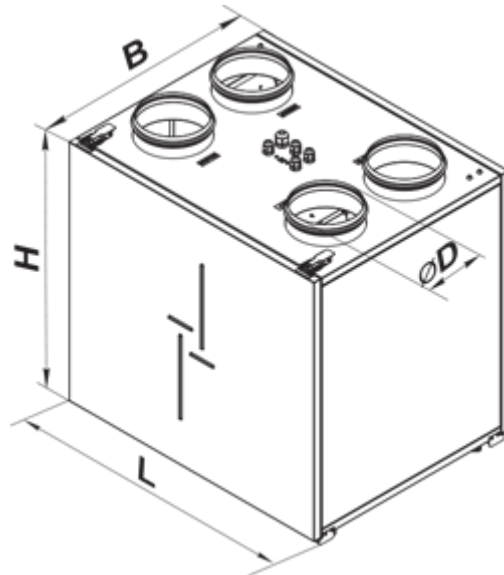
| ØD | B | H | L |
|-----|-----|-----|-----|
| 160 | 560 | 970 | 560 |







Accessories

Control Panels for AHU



| Name | Photo | Description |
|--------------------------|---|---|
| A25 |  | The control panel with a sensor display |
| A22 |  | The A22/A22 WiFi control panels are used for control of industrial and domestic air handling units with an A21 automation system. |
| A22 WiFi |  | The A22/A22 WiFi control panels are used for control of industrial and domestic air handling units with an A21 automation system. |

Sensors





| Name | Photo | Description |
|-----------------------|---|--------------------------------|
| HV2 |  | Humidity sensor |
| CO2-1 |  | CO2 sensors |
| CO2-2 |  | CO2 sensors |
| HR-S |  | Electro-mechanical humidistats |

| | | |
|---------------------------|---|-----------------|
| DPWC11200 |  | Humidity sensor |
|---------------------------|---|-----------------|


VOC sensors

| Name | Photo | Description |
|---------------------------|---|-------------|
| DPWQ30600 |  | VOC sensors |
| DPWQ40200 |  | CO2 sensor |


Electrical heaters

| Name | Photo | Description |
|---------------------------------------|---|---|
| NKD 160-0,8-1 A21 V.2 |  | Duct heater for supply air post-heating with external control |
| NKD 160-1,2-1 A21 V.2 |  | Duct heater for supply air post-heating with external control |
| NKD 160-1,7-1 A21 V.2 |  | Duct heater for supply air post-heating with external control |
| NKD 160-2,0-1 A21 V.2 |  | Duct heater for supply air post-heating with external control |

Condensation drainage

| Name | Photo | Description |
|-----------------------|---|---|
| SH-32 |  | The hydraulic U-trap for condensate drainage from heat exchangers and coolers in ventilation and air conditioning systems |

For round ducts

| Name | Photo | Description |
|-------------------------|---|--|
| KRV 160 |  | Air damper for air flow cut-off in round air ducts |



Electric actuators

| Name | Photo | Description |
|------|-------|-------------|
|------|-------|-------------|


[Belimo LF230](#)


The Belimo LF series actuators are designed for controlling air dampers with cross section up to 0.8 m² performing protection functions


Other accessories

| Name | Photo | Description |
|------------------|---|-----------------|
| SF 340x170x48 G4 |  | Panel filter G4 |
| SF 340x170x48 F7 |  | F7 panel filter |

Flanges

| Name | Photo | Description |
|----------------------|---|--|
| KH-1 |  | The kitchen exhaust hood is designed to clean air from combustion products, fumes, odors that form during cooking in the kitchen |

Ecodesign

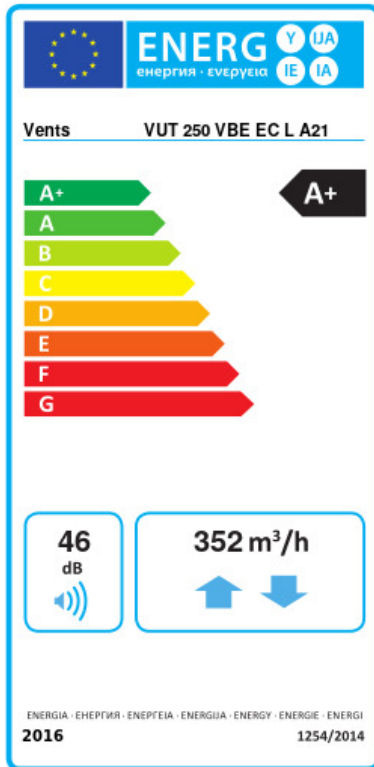

| | | | | | | |
|---|----------------------|----|---------|----|------|---|
| Trademark | Vents | | | | | |
| Model | VUT 250 VBE EC L A21 | | | | | |
| Specific energy consumption (SEC) (kWh/(m ² /a)) | Cold | | Average | | Warm | |
| | 82.5 | A+ | 43 | A+ | 17.8 | E |
| Type of ventilation unit | Bidirectional | | | | | |
| Type of drive installed | Variable speed | | | | | |
| Type of heat recovery system | Recuperative | | | | | |
| Thermal efficiency of heat recovery (%) | 90 | | | | | |
| Maximum flow rate (m ³ /h) | 352 | | | | | |
| Electric power input (W) | 180 | | | | | |
| Reference flow rate (m ³ /s) | 0.068 | | | | | |
| Reference pressure difference (Pa) | 50 | | | | | |
| Specific power input (SPI) (W/(m ³ /h)) | 0.261 | | | | | |
| Control typology | Local demand control | | | | | |
| Maximum internal leakage rates (%) | 2.7 | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Declared typology | RVU BVU | | | | | |
| Sound power level (dB(A)) | 46 | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 720 | | 183 | | 138 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 9181 | | 4693 | | 2122 | |