

VUT 2500 PB EC

Premium range of ceiling mounted heat recovery units for commercial applications

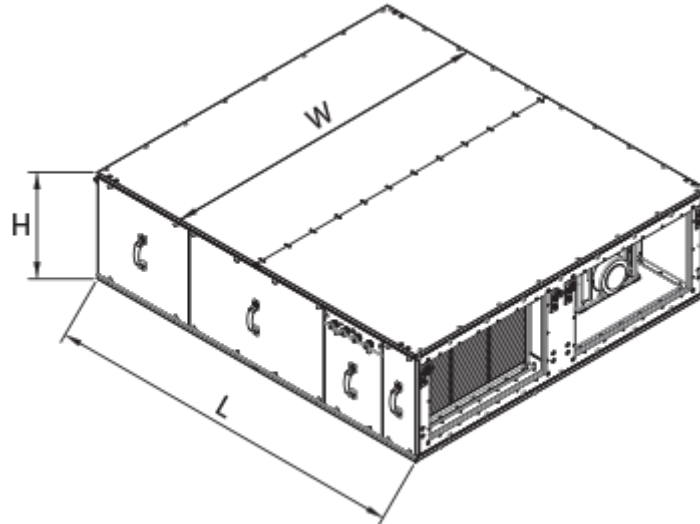
- Maximum airflow: 2800
- Sound pressure level LpA at 3 m: 37
- Heat exchanger type: Counter flow
- Extract filter: G4 (опция F7), G4 (F7 optional)
- Supply filter: G4 (опция F7), G4 (F7 optional)
- Motor type: EC
- Casing material: Aluzinc



	Unit of measurement	VUT 2500 PB EC
Connected air duct size	mm	600x350
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	1480
Unit current	A	6.5
Maximum airflow	m ³ /h	2800
Sound pressure level LpA at 3 m	dB(A)	37
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	220
Extract filter	-	G4 (опция F7), G4 (F7 optional)
Supply filter	-	G4 (опция F7), G4 (F7 optional)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25




Dimensions

L	W	H
1646	1500	480



Accessories

Control Panels for AHU

Name	Photo	Description
A22		The A22/A22 WiFi control panels are used for control of industrial and domestic air handling units with an A21 automation system.
A22 WiFi		The A22/A22 WiFi control panels are used for control of industrial and domestic air handling units with an A21 automation system.
A25		The control panel with a sensor display

Airflow regulators

Name	Photo	Description
RRV 600x350		Air flow controllers

Differential pressure switch


Name	Photo	Description
------	-------	-------------

DTV 500		Pressostat
-------------------------	---	------------

For rectangular ducts

Name	Photo	Description
VVG 600x350		Flexible anti-vibration connector

For rectangular ducts

Name	Photo	Description
SR 600x350		The plate silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems