

VUT 2500 PB EC



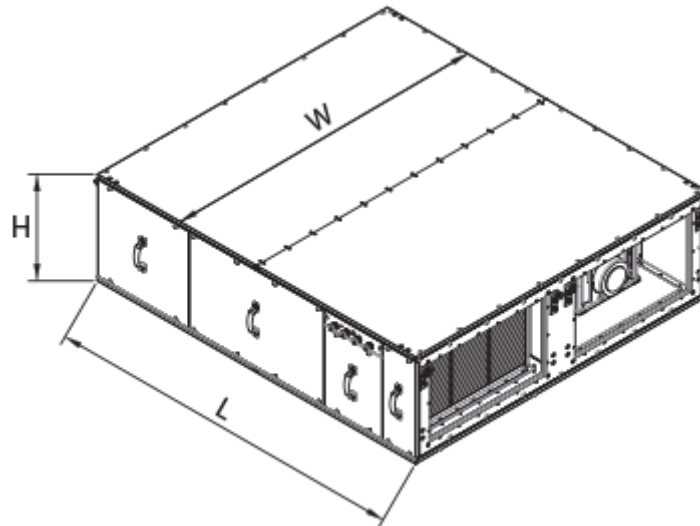
Premium commercial suspended air handling units with a counterflow polystyrene heat exchanger

- Maximum airflow: 2800
- Sound pressure level LpA at 3 m: 37
- Heat exchanger type: Counter flow
- Extract filter: G4 (F7 optional)
- Supply filter: G4 (F7 optional)
- Motor type: EC
- Casing material: Aluzinc

	Unit of measurement	VUT 2500 PB EC
Connected air duct size	mm	600x350
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	1480
Unit current	A	6.5
Maximum airflow	m ³ /h	2800
Sound pressure level LpA at 3 m	dB(A)	37
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	220
Extract filter	-	G4 (F7 optional)
Supply filter	-	G4 (F7 optional)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25




Dimensions

L	W	H
1646	1500	480



Accessories

Control Panels for AHU


Name	Photo	Description
A22		Control panels for controlling industrial and residential air handling units
A22 WiFi		Control panels for controlling industrial and residential air handling units
A25		Touch screen control panel for controlling industrial and residential air handling units

Airflow regulators

Name	Photo	Description
RRV 600x350		Air flow controllers

Differential pressure switch

Name	Photo	Description
------	-------	-------------

DTV 500		Pressostat
-------------------------	-----------------------------------------------------------------------------------	------------

For rectangular ducts

Name	Photo	Description
VVG 600x350		Flexible anti-vibration inserts for round air ducts

For rectangular ducts

Name	Photo	Description
SR 600x350		Plate silencer for installation in rectangular ducts