

VUT 300 E2V EC



Air handling units with heat recovery for cold climate

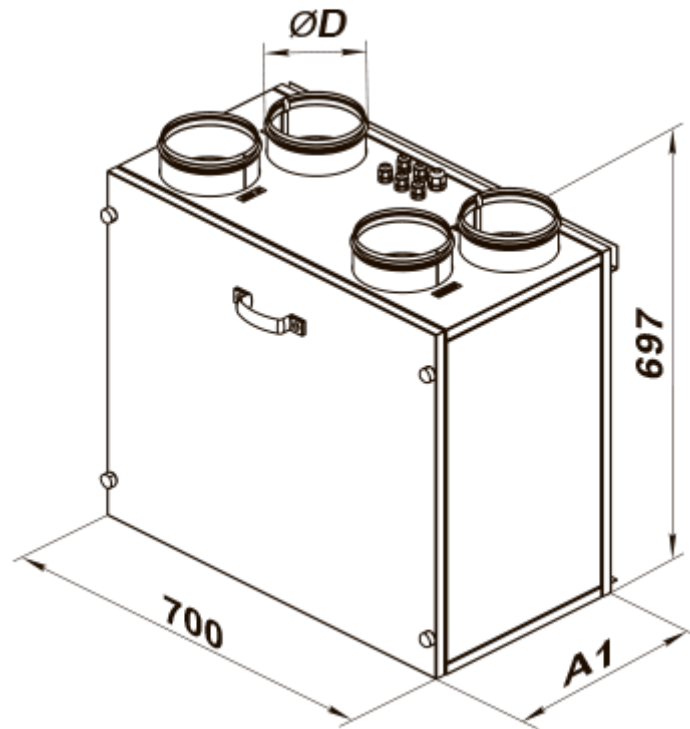
- Power of electrical reheater: 4000
- Maximum airflow: 300
- Sound pressure level LpA at 3 m: 37
- Heat exchanger type: Counter flow
- Extract filter: G4
- Supply filter: G4 (F7 опция), G4 (F7 option)
- Motor type: EC
- Reheater: Electric
- Control: Remote Control
- Casing material: Aluzinc

	Unit of measurement	VUT 300 E2V EC
Connected air duct size	mm	150
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	212
Power of electrical reheater	W	4000
Unit current	A	18.8
Maximum airflow	m ³ /h	300
Sound pressure level LpA at 3 m	dB(A)	37
Heat recovery efficiency, max	%	95
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	38
Extract filter	-	G4
Supply filter	-	G4 (F7 опция), G4 (F7 option)
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-39
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	80

Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44
ErP compliance	-	2016, 2018
Cold - Specific energy consumption (SEC)	kWh/(m ² /a)	78.6
SEC Class Cold	-	A+
Average - Specific energy consumption (SEC)	kWh/(m ² /a)	39.3
SEC Class Average	-	A
Warm - Specific energy consumption (SEC)	kWh/(m ² /a)	14.1
SEC Class Warm	-	E
Unit category	-	RVU
Type of ventilation unit	-	Bidirectional
Type of drive installed	-	Variable speed
Type of heat recovery system	-	Recuperative
Thermal efficiency of heat recovery	%	89
Maximum flow rate	m ³ /h	270
Electric power input	W	205
Reference flow rate	m ³ /s	0.053
Reference pressure difference	Pa	50
Specific power input (SPI)	W/(m ³ /h)	0.529
Control typology	-	Local demand control
Maximum internal leakage rates	%	2.7
Maximum external leakage rates	%	2.7
Cold - The annual electricity consumption (AEC)	kWh/a	862
Average - The annual electricity consumption (AEC)	kWh/a	325
Warm - Jährlicher Stromverbrauch (JSV)	kWh/a	280
Cold - The annual heating saved (AHS)	kWh/a	9141
The annual heating saved (AHS) Average	kWh/a	4673
The annual heating saved (AHS) Warm	kWh/a	2113
Sound power level	dB(A)	57
Declared typology	-	RVU BVU







Dimensions

ØD	A1
150	373





Accessories

For round ducts



Name	Photo	Description
SR 150/600		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 150/900		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 150/1200		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SRF 150/600		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SRF 150/900		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SRF 150/2000		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems

For round ducts





Name	Photo	Description
------	-------	-------------

KOM 150		Spring-loaded backdraft damper for round ducts
KOMu 150		Spring-loaded backdraft damper for round ducts


Sensors

Name	Photo	Description
CO2-1		CO2 sensors
CO2-2		CO2 sensors

Electric actuators

Name	Photo	Description
Belimo LF24		The Belimo LF series actuators are designed for controlling air dampers with cross section up to 0.8 m ² performing protection functions
Belimo LF230		The Belimo LF series actuators are designed for controlling air dampers with cross section up to 0.8 m ² performing protection functions
Belimo TF24		The actuators are designed for controlling air dampers with cross section up to 0.4 m ² performing protection functions
Belimo TF230		The actuators are designed for controlling air dampers with cross section up to 0.4 m ² performing protection functions

Other accessories

Name	Photo	Description
C 150		The clamps are designed for quick and reliable mounting and connection of various round ventilation system components. Clamps are made of stainless and galvanized steel band