

VUT 300 PBE EC R A21 DTV





Ceiling mounted air handling units in compact heat- and sound-insulated casing with an electric heater

- Power of electrical reheater: 1500
- Maximum airflow: 340
- Sound pressure level LpA at 3 m: 27
- Heat exchanger type: Counter flow
- Extract filter: G4
- Supply filter: G4 (F7 option)
- Sound insulation
- Motor type: EC
- Bypass: Auto
- Reheater: Electric
- Preheater: Optional
- BMS protocol: ModBus
- Control: Smartphone
- Casing material: Galvanized steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- VOC sensor: Optional
- PM2.5 sensor: Optional

	Unit of measurement	VUT 300 PBE EC R A21 DTV
Connected air duct size	mm	160
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	180
Power of electrical reheater	W	1500
Unit current	A	7.9
Maximum airflow	m ³ /h	340
Sound pressure level LpA at 3 m	dB(A)	27
Heat recovery efficiency, max	%	90
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	44
Extract filter	-	G4
Supply filter	-	G4 (F7 option)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25


Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	60
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

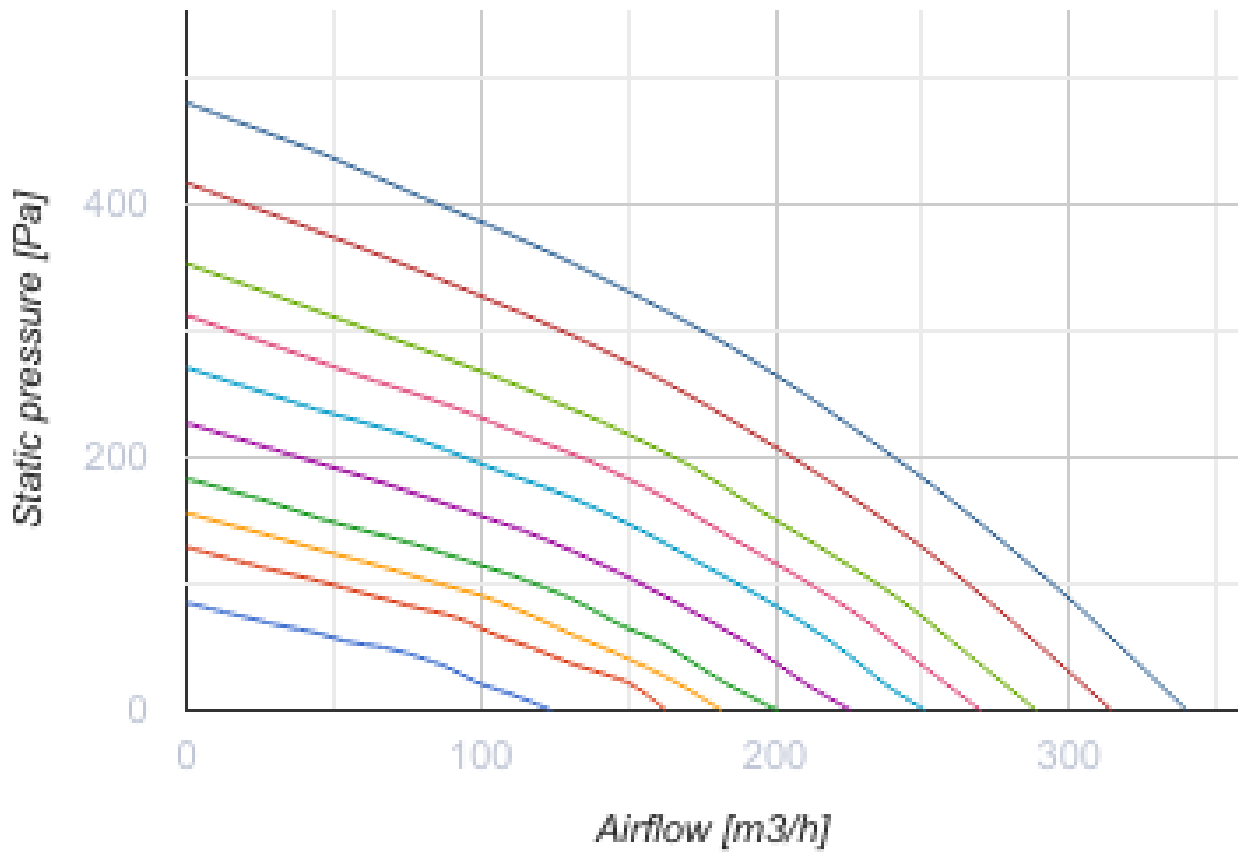

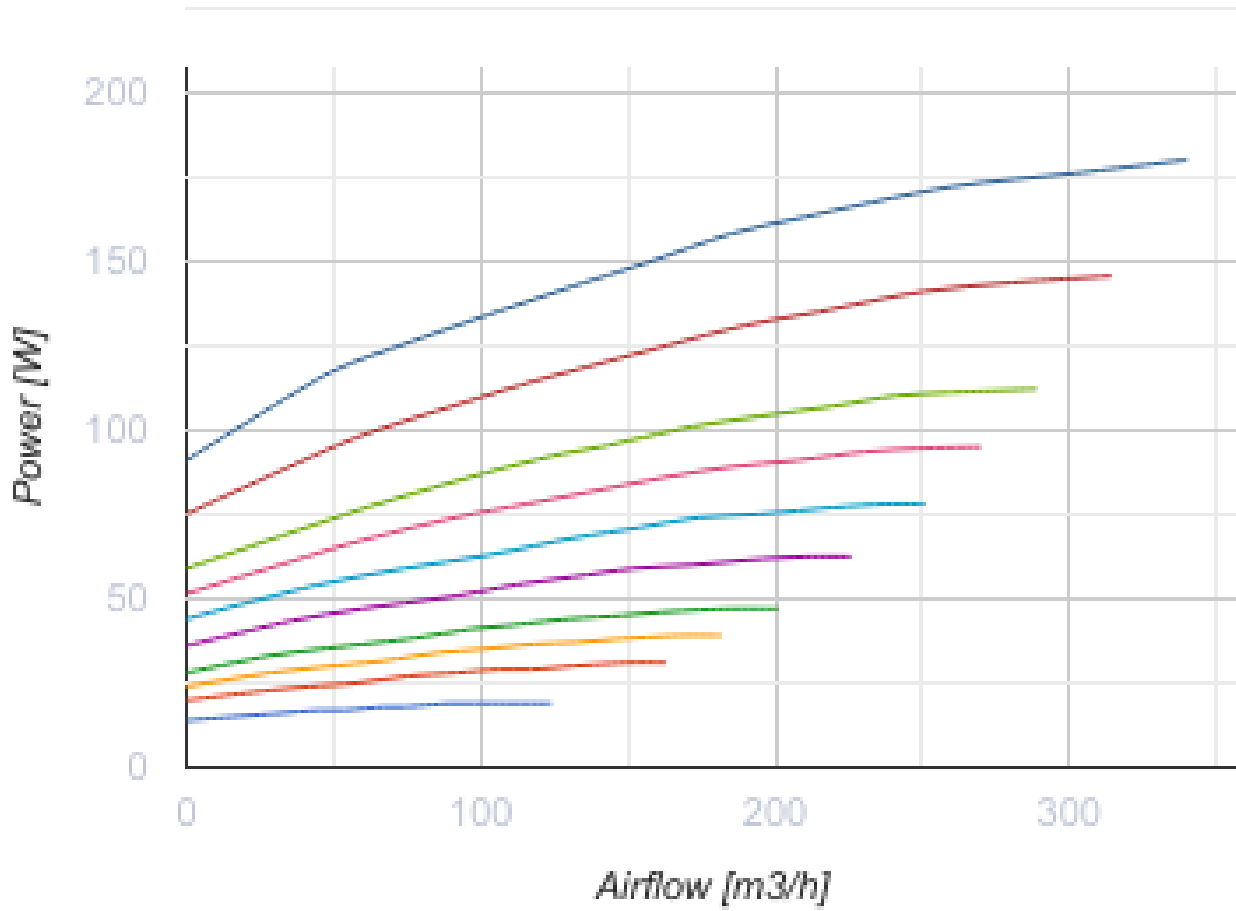




Dimensions

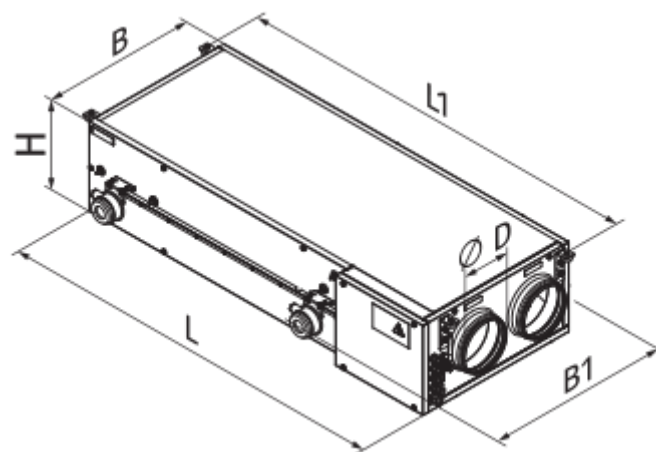$\varnothing D$	B	B1	H	L	L1
160	485	577	280	1238	1291








Accessories



Control Panels for AHU

Name	Photo	Description
A22		The A22/A22 WiFi control panels are used for control of industrial and domestic air handling units with an A21 automation system.
A22 WiFi		The A22/A22 WiFi control panels are used for control of industrial and domestic air handling units with an A21 automation system.
A25		The control panel with a sensor display

Sensors


Name	Photo	Description
HV2		Humidity sensor
CO2-1		CO2 sensors
CO2-2		CO2 sensors
HR-S		Electro-mechanical humidistats
DPWC11200		Humidity sensor

VOC sensors







Name	Photo	Description
DPWQ30600		VOC sensors
DPWQ40200		CO2 sensor

Condensation drainage



Name	Photo	Description
------	-------	-------------

SH-32		The hydraulic U-trap for condensate drainage from heat exchangers and coolers in ventilation and air conditioning systems
-----------------------	---	---



For round ducts

Name	Photo	Description
SR 160/600		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 160/900		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 160/1200		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SRF 160/600		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SRF 160/900		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SRF 160/2000		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems

For round ducts





Name	Photo	Description
KOM 160		Spring-loaded backdraft damper for round ducts
KRV 160		Air damper for air flow cut-off in round air ducts

Electric actuators





Name	Photo	Description
Belimo LF230		The Belimo LF series actuators are designed for controlling air dampers with cross section up to 0.8 m ² performing protection functions
Belimo TF230		The actuators are designed for controlling air dampers with cross section up to 0.4 m ² performing protection functions

Other accessories


Name	Photo	Description
------	-------	-------------

SFK 208x236x27 G4		G4 pocket filter
SFK 208x236x27 F7		F7 pocket filter
SF 400x196x40 G4		Panel filter G4
SF 440x128x20 G4		Panel filter G4

Electrical heaters

Name	Photo	Description
NKP 160-0,8-1 A21 V.2		Heater for heat exchanger freeze protection
NKP 160-2,0-1 A21 V.2		Heater for heat exchanger freeze protection
NKP 160-1,7-1 A21 V.2		Heater for heat exchanger freeze protection
NKP 160-1,2-1 A21 V.2		Heater for heat exchanger freeze protection

Ecodesign

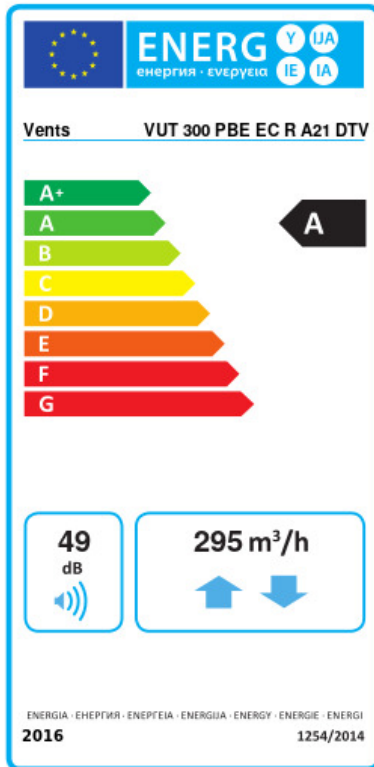

Trademark	Vents					
Model	VUT 300 PBE EC R A21 DTV					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average		Warm	
	75.7	A+	39	A	15.3	E
Type of ventilation unit	Bidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	Recuperative					
Thermal efficiency of heat recovery (%)	76					
Maximum flow rate (m ³ /h)	295					
Electric power input (W)	174					
Reference flow rate (m ³ /s)	0.061					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m ³ /h))	0.35					
Control typology	Local demand control					
Maximum internal leakage rates (%)	2.7					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU BVU					
Sound power level (dB(A))	49					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	767		230		185	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	8614		4403		1991	