

VUT 3500 PB EC



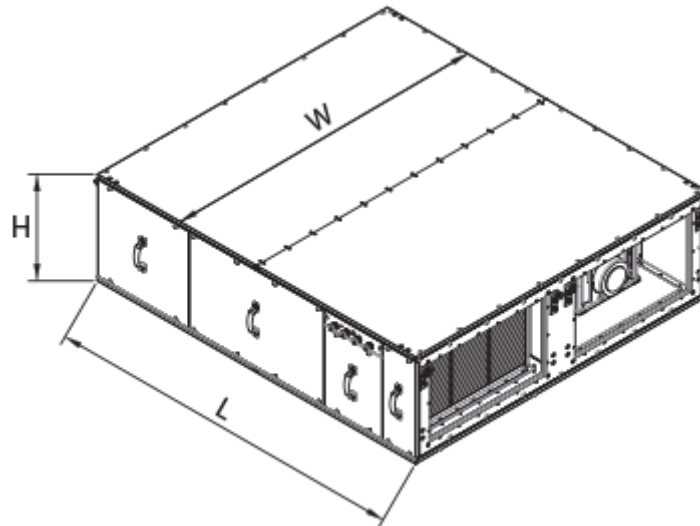
Premium commercial suspended air handling units with a counterflow polystyrene heat exchanger

- Maximum airflow: 3300
- Sound pressure level LpA at 3 m: 34
- Heat exchanger type: Counter flow
- Extract filter: G4 (F7 optional)
- Supply filter: G4 (F7 optional)
- Motor type: EC
- Casing material: Aluzinc

	Unit of measurement	VUT 3500 PB EC
Connected air duct size	mm	600x350
Speed	-	1
Phases	-	3
Minimum supply voltage	V	380
Maximum supply voltage	V	380
Power supply frequency	Hz	50/60
Rated power	W	2240
Unit current	A	3.6
Maximum airflow	m ³ /h	3300
Sound pressure level LpA at 3 m	dB(A)	34
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	290
Extract filter	-	G4 (F7 optional)
Supply filter	-	G4 (F7 optional)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25




Dimensions

L	W	H
1880	1500	630



Accessories

Control Panels for AHU

Name	Photo	Description
A22		Control panels for controlling industrial and residential air handling units
A22 WiFi		Control panels for controlling industrial and residential air handling units
A25		Touch screen control panel for controlling industrial and residential air handling units

Airflow regulators

Name	Photo	Description
RRV 600x350		Air flow controllers

Differential pressure switch

Name	Photo	Description
------	-------	-------------

DTV 500		Pressostat
-------------------------	---	------------

For rectangular ducts

Name	Photo	Description
VVG 600x350		Flexible anti-vibration inserts for round air ducts

For rectangular ducts

Name	Photo	Description
SR 600x350		Plate silencer for installation in rectangular ducts