

VUT 530 H



Air handling units in the compact sound- and heat-insulated casing

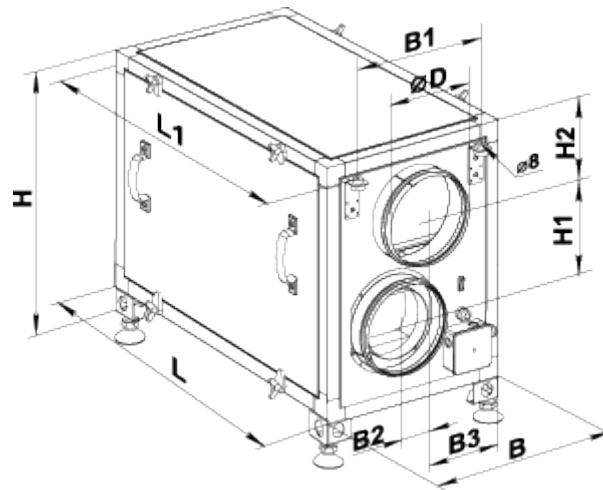
- Maximum airflow: 530
- Sound pressure level LpA at 3 m: 48
- Heat exchanger type: Cross flow
- Extract filter: G4
- Supply filter: G4
- Sound insulation
- Motor type: AC
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	VUT 530 H
Connected air duct size	mm	249
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	300
Unit current	A	1.32
Maximum airflow	m ³ /h	530
Sound pressure level LpA at 3 m	dB(A)	48
Heat recovery efficiency, max	%	88
Heat exchanger type	-	Cross flow
Heat exchanger material	-	Polystyrene
Weight	kg	49
Extract filter	-	G4
Supply filter	-	G4
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	10
Ambient air temperature max	°C	50
Ambient air humidity max	%	80
Ingress protection rating	-	IP22

Ingress protection rating of the drive	-	IP44
ErP compliance	-	2016
Cold - Specific energy consumption (SEC)	kWh/(m ² /a)	48.8
SEC Class Cold	-	A+
Average - Specific energy consumption (SEC)	kWh/(m ² /a)	18.2
SEC Class Average	-	E
Warm - Specific energy consumption (SEC)	kWh/(m ² /a)	1.9
SEC Class Warm	-	G
Unit category	-	RVU
Type of ventilation unit	-	Bidirectional
Type of drive installed	-	Multi-speed
Type of heat recovery system	-	Recuperative
Thermal efficiency of heat recovery	%	64
Maximum flow rate	m ³ /h	470
Electric power input	W	300
Reference flow rate	m ³ /s	0.091
Reference pressure difference	Pa	50
Specific power input (SPI)	W/(m ³ /h)	0.578
Control typology	-	Manual control
Maximum internal leakage rates	%	2.7
Maximum external leakage rates	%	2.7
Cold - The annual electricity consumption (AEC)	kWh/a	1336
Average - The annual electricity consumption (AEC)	kWh/a	799
Warm - Jährlicher Stromverbrauch (JSV)	kWh/a	754
Cold - The annual heating saved (AHS)	kWh/a	7343
The annual heating saved (AHS) Average	kWh/a	3754
The annual heating saved (AHS) Warm	kWh/a	1697
Declared typology	-	RVU BVU
Sound power level	dB(A)	57







Dimensions

ØD	B	B1	B2	B3	H	H1	H2	L	L1
159	416	300	54	207	603	230	148	722	768





Accessories



For round ducts

Name	Photo	Description
SR 160/600		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 160/900		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 160/1200		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SRF 160/600		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SRF 160/900		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SRF 160/2000		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems

For round ducts

Name	Photo	Description
KOM 160		Spring-loaded backdraft damper for round ducts
KR 160		Air damper for air flow control in round air ducts

Other accessories

Name	Photo	Description
SF 378x210x48 G4		Panel filter G4
VL C4 300/384		Summer block