

VUT 550 VB EC A14



Air handling units in heat- and sound-insulated casing equipped with a counter-flow polystyrene heat exchanger


- Maximum airflow: 692
- Sound pressure level LpA at 3 m: 38
- Heat exchanger type: Counter flow
- Extract filter: G4
- Supply filter: F7 (G4 optional)
- Sound insulation
- Motor type: EC
- Bypass: Manual
- Control: Remote Control
- Casing material: Coated steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- VOC sensor: Optional
- PM2.5 sensor: Optional

	Unit of measurement	VUT 550 VB EC A14
Connected air duct size	mm	200
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	350
Unit current	A	2.4
Maximum airflow	m ³ /h	692
Sound pressure level LpA at 3 m	dB(A)	38
Heat recovery efficiency, max	%	92
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	82
Extract filter	-	G4
Supply filter	-	F7 (G4 optional)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	60
Ingress protection rating	-	IP20

Ingress protection rating of the drive	-	IP44
ErP compliance	-	2016, 2018
Cold - Specific energy consumption (SEC)	kWh/(m ² /a)	81.3
SEC Class Cold	-	A+
Average - Specific energy consumption (SEC)	kWh/(m ² /a)	42.2
SEC Class Average	-	A+
Warm - Specific energy consumption (SEC)	kWh/(m ² /a)	17.1
SEC Class Warm	-	E
Unit category	-	RVU
Type of ventilation unit	-	Bidirectional
Type of drive installed	-	Variable speed
Type of heat recovery system	-	Recuperative
Thermal efficiency of heat recovery	%	88
Maximum flow rate	m ³ /h	638
Electric power input	W	350
Reference flow rate	m ³ /s	0.123
Reference pressure difference	Pa	50
Specific power input (SPI)	W/(m ³ /h)	0.295
Control typology	-	Local demand control
Maximum internal leakage rates	%	2.7
Maximum external leakage rates	%	2.7
Cold - The annual electricity consumption (AEC)	kWh/a	738
Average - The annual electricity consumption (AEC)	kWh/a	201
Warm - Jährlicher Stromverbrauch (JSV)	kWh/a	156
Cold - The annual heating saved (AHS)	kWh/a	9100
The annual heating saved (AHS) Average	kWh/a	4652
The annual heating saved (AHS) Warm	kWh/a	2104
Declared typology	-	RVU BVU
Sound power level	dB(A)	48



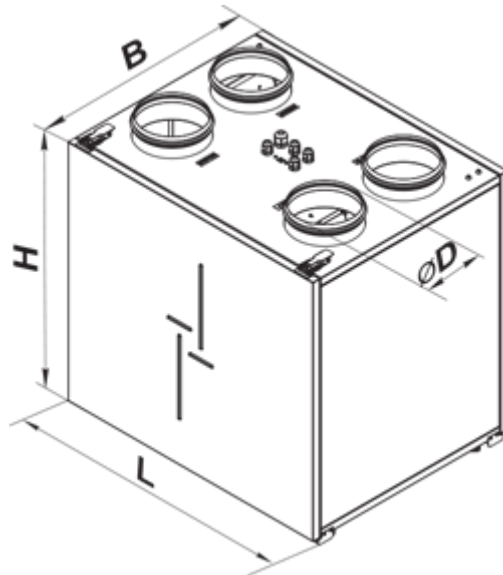

Dimensions

ØD	B	H	L
200	720	675	823




Accessories

Sensors

Name	Photo	Description
HV2		Humidity sensor
CO2-1		CO2 sensors
CO2-2		CO2 sensors
HR-S		Electro-mechanical humidistats


Condensation drainage

Name	Photo	Description
SH-32		The hydraulic U-trap for condensate drainage from heat exchangers and coolers in ventilation and air conditioning systems



For round ducts

Name	Photo	Description
KRV 200		Air damper for air flow cut-off in round air ducts


Electric actuators

Name	Photo	Description
Belimo LF230		The Belimo LF series actuators are designed for controlling air dampers with cross section up to 0.8 m ² performing protection functions

Other accessories

Name	Photo	Description
SF 630x198x40 G4		Panel filter G4
SF 630x198x40 F7		F7 panel filter

Cooker Hoods

Name	Photo	Description
KH-1		The kitchen exhaust hood is designed to clean air from combustion products, fumes, odors that form during cooking in the kitchen