

VUT 700 HB EC A21





Horizontal air handling units with a counterflow polystyrene or enthalpy heat exchanger

- Maximum airflow: 830
- Sound pressure level LpA at 3 m: 31
- Heat exchanger type: Counter flow
- Extract filter: G4
- Supply filter: G4+F7
- Sound insulation
- Motor type: EC
- Bypass: Auto
- Reheater: Optional
- Preheater: Optional
- BMS protocol: ModBus
- Control: Smartphone
- Casing material: Galvanized steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- VOC sensor: Optional
- PM2.5 sensor: Optional

	Unit of measurement	VUT 700 HB EC A21
Connected air duct size	mm	250
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	336
Unit current	A	2.4
Maximum airflow	m ³ /h	830
Sound pressure level LpA at 3 m	dB(A)	31
Heat recovery efficiency, max	%	98
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	107
Extract filter	-	G4
Supply filter	-	G4+F7
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	80
Ingress protection rating	-	IP22


Ingress protection rating of the drive	-	IP44
--	---	------

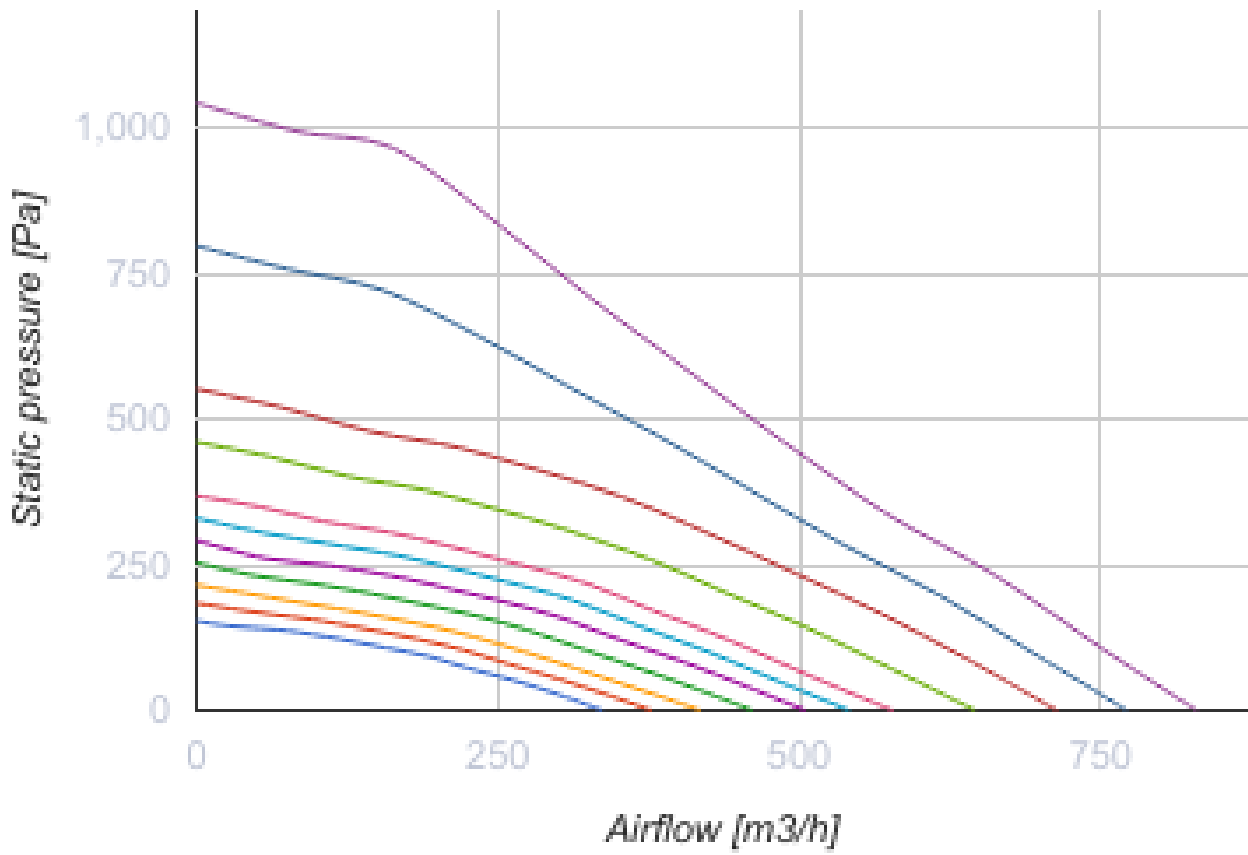

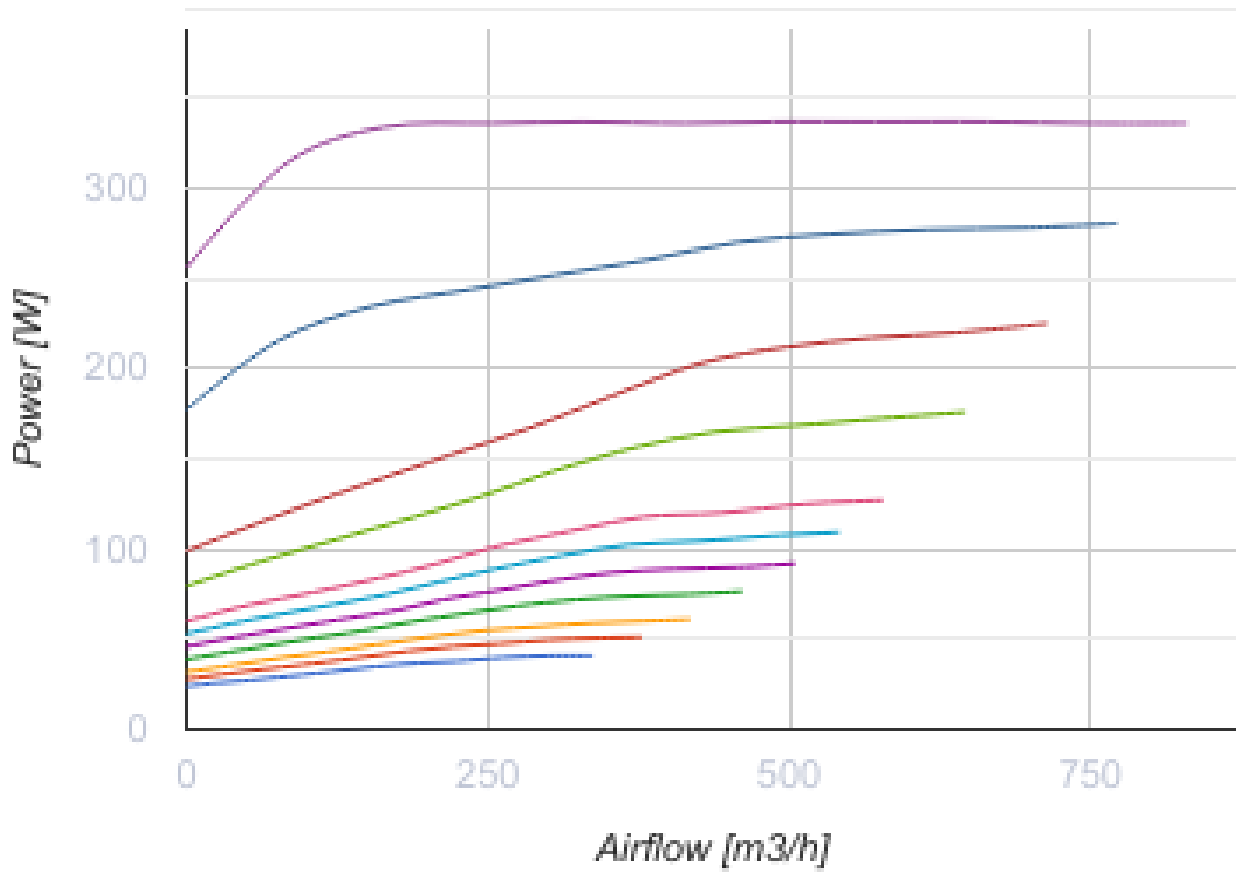




Dimensions

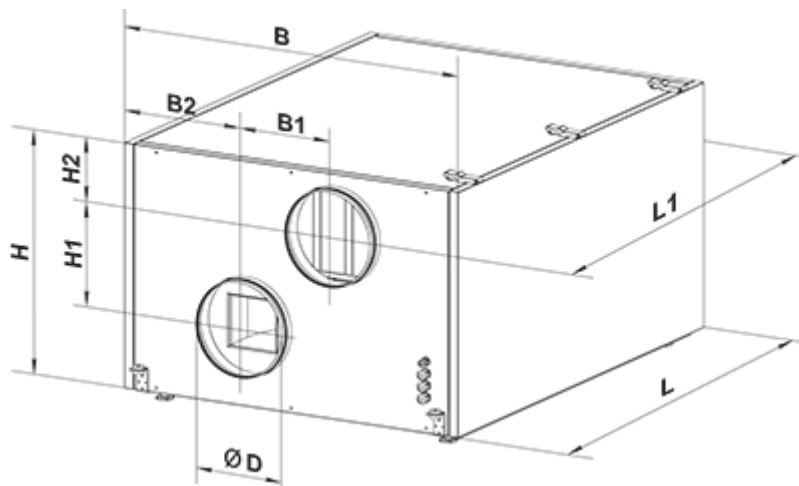ØD	B	B1	B2	H	H1	H2	L	L1
247	866	274	296	601	234	166	1282	1379







Accessories





Control Panels for AHU



Name	Photo	Description
A25		Touch screen control panel for controlling industrial and residential air handling units
A22		Control panels for controlling industrial and residential air handling units
A22 WiFi		Control panels for controlling industrial and residential air handling units

Sensors




Name	Photo	Description
HV2		Humidity sensor
CO2-1		CO2 sensors
CO2-2		CO2 sensors
HR-S		Electro-mechanical humidistat

Electrical heaters



Name	Photo	Description
NKD 250-1,2-1 A21 V.2		Inline supply air reheaters with external control
NKD 250-2,0-1 A21 V.2		Inline supply air reheaters with external control
NKD 250-3,0-1 A21 V.2		Inline supply air reheaters with external control
NKP 250-1,2-1 A21 V.2		Inline heaters for heat exchanger frost protection

NKP 250-2,0-1 A21 V.2		Inline heaters for heat exchanger frost protection
NKP 250-3,0-1 A21 V.2		Inline heaters for heat exchanger frost protection


For round ducts

Name	Photo	Description
SR 250/600		Silencers made of galvanized steel filled with non-combustible sound-absorbing material
SR 250/900		Silencers made of galvanized steel filled with non-combustible sound-absorbing material
SR 250/1200		Silencers made of galvanized steel filled with non-combustible sound-absorbing material


For round ducts

Name	Photo	Description
KOM 250		Backdraught damper with spring-loaded plates for shutting off air flow in round air ducts
KRV 250		Air dampers for automatic air flow control in round ducts


Electric actuators

Name	Photo	Description
Belimo TF230		The actuators are designed for controlling air dampers with cross section up to 0.4 m ² performing protection functions

Other accessories

Name	Photo	Description
SF 784x253x48 G4		Panel filter G4
SF 784x253x48 F7		F7 panel filter

Ecodesign

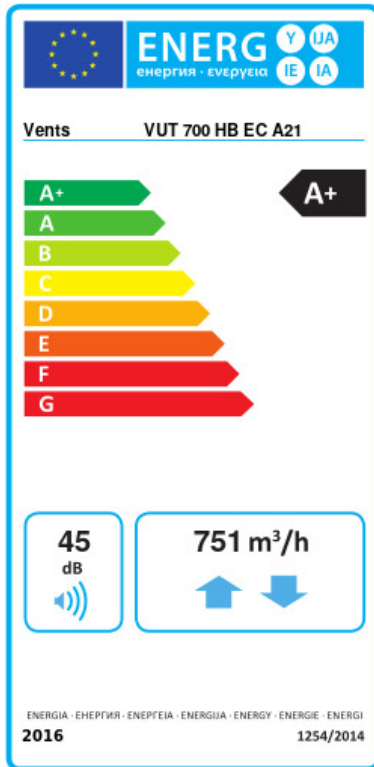

Trademark	Vents					
Model	VUT 700 HB EC A21					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average		Warm	
	-80.8	A+	-42.2	A+	-17.5	E
Type of ventilation unit	Bidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	Recuperative					
Thermal efficiency of heat recovery (%)	85					
Maximum flow rate (m ³ /h)	751					
Electric power input (W)	336					
Reference flow rate (m ³ /s)	0.143					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m ³ /h))	0.243					
Control typology	Local demand control					
Maximum internal leakage rates (%)	2.7					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU BVU					
Sound power level (dB(A))	45					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	710		173		128	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	8979		4590		2075	