

VUTR 250 PE EC L A21



Air handling units in heat- and sound-insulated casing

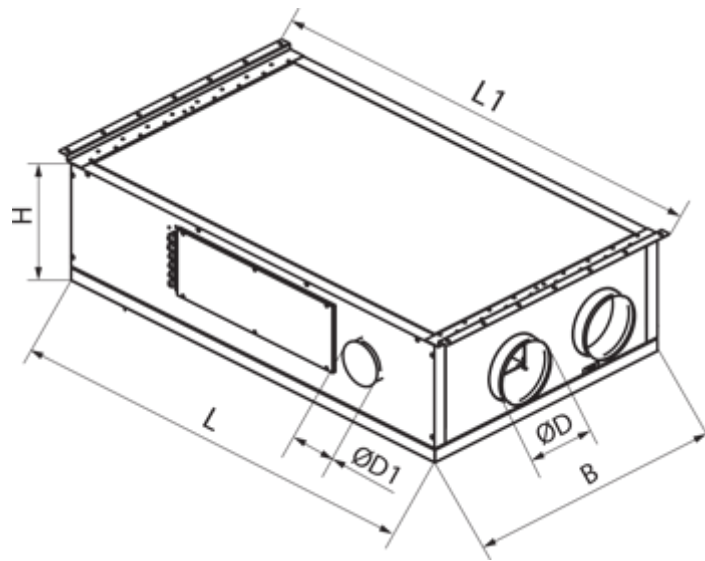
- Power of electrical reheater: 700
- Maximum airflow: 310
- Sound pressure level LpA at 3 m: 21
- Heat exchanger type: Rotary
- Extract filter: G4
- Supply filter: G4, F7 (H13 option)
- Sound insulation
- Motor type: EC
- Reheater: Electric
- BMS protocol: ModBus
- Control: Smartphone
- Casing material: Galvanized steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- VOC sensor: Optional
- PM2.5 sensor: Optional

	Unit of measurement	VUTR 250 PE EC L A21
Connected air duct size	mm	160
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	135
Power of electrical reheater	W	700
Unit current	A	4.1
Maximum airflow	m ³ /h	310
Sound pressure level LpA at 3 m	dB(A)	21
Heat recovery efficiency, max	%	87
Heat exchanger type	-	Rotary
Heat exchanger material	-	Aluminum
Weight	kg	56
Extract filter	-	G4
Supply filter	-	G4, F7 (H13 option)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1

Ambient air temperature max	°C	40
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44




Dimensions

ØD	ØD1	B	H	L	L1
160	125	688	345	1003	1100



Accessories

Control Panels for AHU




Name	Photo	Description
A25		The control panel with a sensor display
A22		The A22/A22 WiFi control panels are used for control of industrial and domestic air handling units with an A21 automation system.
A22 WiFi		The A22/A22 WiFi control panels are used for control of industrial and domestic air handling units with an A21 automation system.

VOC sensors



Name	Photo	Description
------	-------	-------------

DPWQ30600		VOC sensors
DPWQ40200		CO2 sensor



Sensors

Name	Photo	Description
DPWC11200		Humidity sensor
HR-S		Electro-mechanical humidistats
HV2		Humidity sensor

For round ducts

Name	Photo	Description
KOM 160		Spring-loaded backdraft damper for round ducts
KRV 160		Air damper for air flow cut-off in round air ducts

Electric actuators


Name	Photo	Description
Belimo LF230		The Belimo LF series actuators are designed for controlling air dampers with cross section up to 0.8 m ² performing protection functions
Belimo TF230		The actuators are designed for controlling air dampers with cross section up to 0.4 m ² performing protection functions

Other accessories

Name	Photo	Description
SF 260x220x48 G4		Panel filter G4

SF 260x220x48 F7		F7 panel filter
------------------	---	-----------------

Cooker Hoods

Name	Photo	Description
KH-1		The kitchen exhaust hood is designed to clean air from combustion products, fumes, odors that form during cooking in the kitchen