

VUTR 650 PE EC L A21





Suspended air handling units with a sorption rotary heat exchanger

- Power of electrical reheater: 2800
- Maximum airflow: 710
- Sound pressure level LpA at 3 m: 36
- Heat exchanger type: Rotary
- Extract filter: G4
- Supply filter: G4, F7 (H13 option)
- Sound insulation
- Motor type: EC
- Reheater: Electric
- BMS protocol: ModBus
- Control: Smartphone
- Casing material: Galvanized steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- VOC sensor: Optional
- PM2.5 sensor: Optional


| | Unit of measurement | VUTR 650 PE EC L A21 |
|-----------------------------------|---------------------|----------------------|
| Connected air duct size | mm | 200 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 367 |
| Power of electrical reheater | W | 2800 |
| Unit current | A | 13.7 |
| Maximum airflow | m ³ /h | 710 |
| Sound pressure level LpA at 3 m | dB(A) | 36 |
| Heat recovery efficiency, max | % | 87 |
| Heat exchanger type | - | Rotary |
| Heat exchanger material | - | Aluminum |
| Weight | kg | 104 |
| Extract filter | - | G4 |
| Supply filter | - | G4, F7 (H13 option) |
| Transported air temperature (max) | °C | 40 |
| Transported air temperature (min) | °C | -25 |
| Ambient air temperature min | °C | 1 |

| | | |
|--|----|------|
| Ambient air temperature max | °C | 40 |
| Ambient air humidity max | % | 80 |
| Ingress protection rating | - | IP22 |
| Ingress protection rating of the drive | - | IP44 |

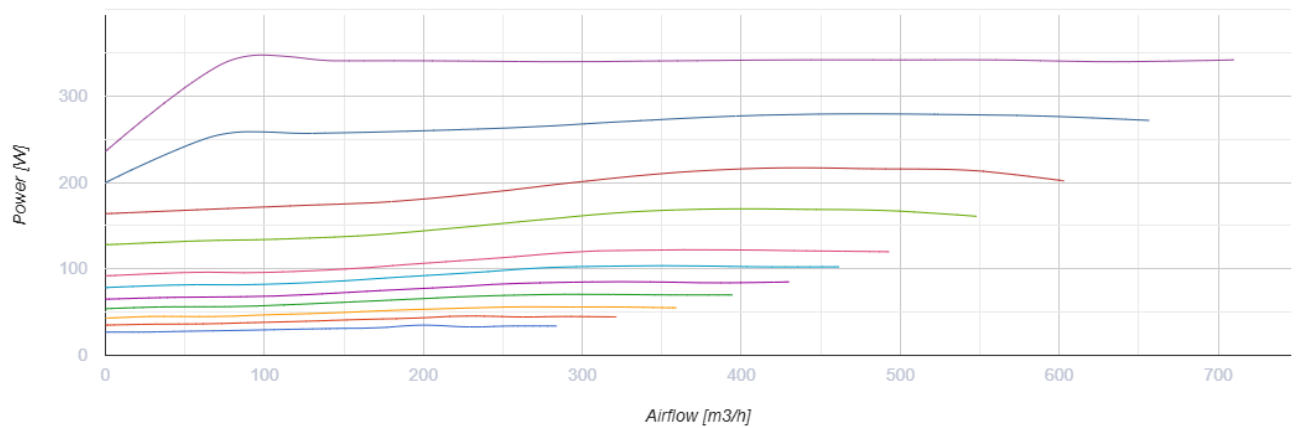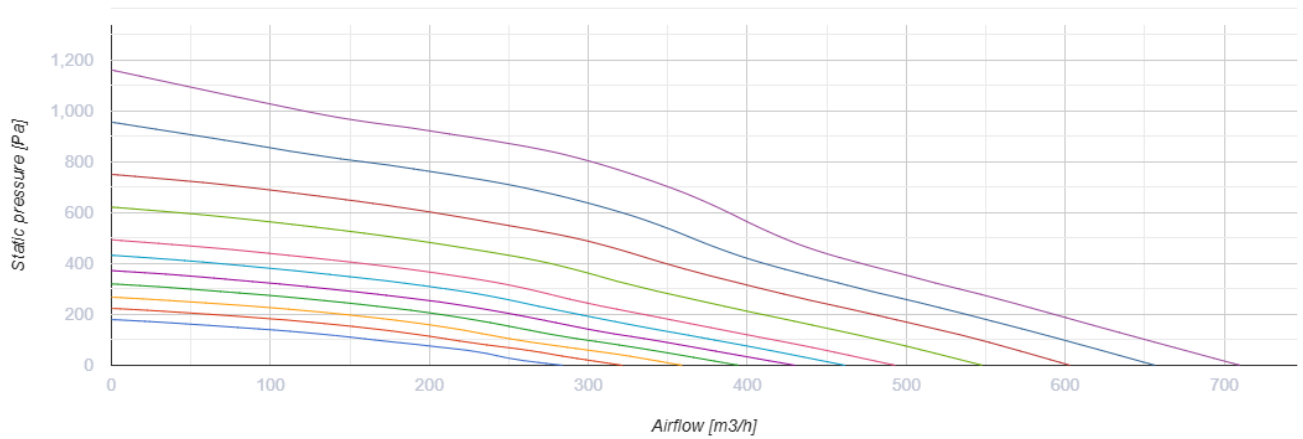




Dimensions
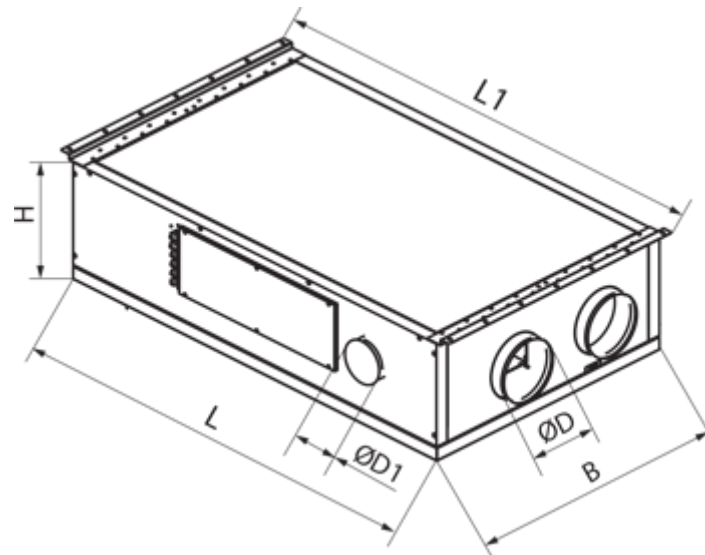
| ØD | ØD1 | B | H | L | L1 |
|-----|-----|-----|-----|------|------|
| 160 | 125 | 818 | 361 | 1270 | 1365 |





Accessories

Control Panels for AHU


| Name | Photo | Description |
|--------------------------|---|---|
| A25 |  | The control panel with a sensor display |
| A22 |  | The A22/A22 WiFi control panels are used for control of industrial and domestic air handling units with an A21 automation system. |
| A22 WiFi |  | The A22/A22 WiFi control panels are used for control of industrial and domestic air handling units with an A21 automation system. |

Sensors


| Name | Photo | Description |
|----------------------|---|--------------------------------|
| HR-S |  | Electro-mechanical humidistats |
| HV2 |  | Humidity sensor |

For round ducts



| Name | Photo | Description |
|-------------------------|---|--|
| KOM 200 |  | Spring-loaded backdraft damper for round ducts |

| | | |
|-------------------------|---|--|
| KRV 200 |  | Air damper for air flow cut-off in round air ducts |
|-------------------------|---|--|


Electric actuators

| Name | Photo | Description |
|------------------------------|---|--|
| Belimo TF230 |  | The actuators are designed for controlling air dampers with cross section up to 0.4 m ² performing protection functions |


Other accessories

| Name | Photo | Description |
|------------------|---|-----------------|
| SF 378x295x48 G4 |  | Panel filter G4 |
| SF 378x295x48 F7 |  | F7 panel filter |

Flanges

| Name | Photo | Description |
|----------------------|---|--|
| KH-1 |  | The kitchen exhaust hood is designed to clean air from combustion products, fumes, odors that form during cooking in the kitchen |

Ecodesign

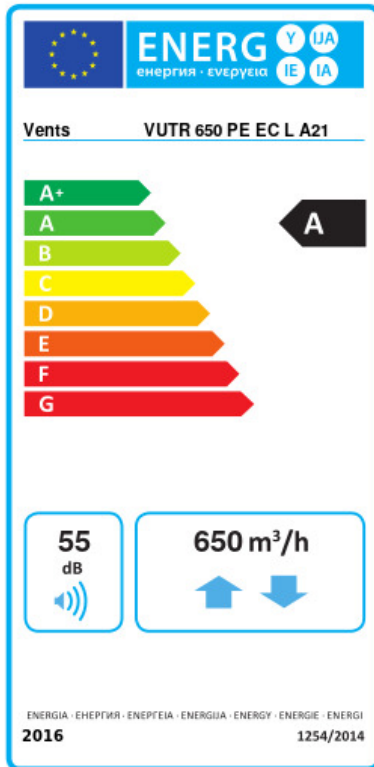

| | | | | | | | |
|--|----------------------|----|---------|---|------|---|--|
| Trademark | Vents | | | | | | |
| Model | VUTR 650 PE EC L A21 | | | | | | |
| Specific energy consumption (SEC) (kWh/(m²/a)) | Cold | | Average | | Warm | | |
| | 85.4 | A+ | 41.9 | A | 17 | E | |
| Type of ventilation unit | Bidirectional | | | | | | |
| Type of drive installed | Variable speed | | | | | | |
| Type of heat recovery system | Regenerative | | | | | | |
| Thermal efficiency of heat recovery (%) | 83 | | | | | | |
| Maximum flow rate (m³/h) | 650 | | | | | | |
| Electric power input (W) | 340 | | | | | | |
| Reference flow rate (m³/s) | 0.125 | | | | | | |
| Reference pressure difference (Pa) | 50 | | | | | | |
| Specific power input (SPI) (W/(m³/h)) | 0.269 | | | | | | |
| Control typology | Local demand control | | | | | | |
| Maximum internal leakage rates (%) | 2.7 | | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | | |
| Declared typology | RVU BVU | | | | | | |
| Sound power level (dB(A)) | 55 | | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | | |
| | 142 | | 142 | | 142 | | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | | |
| | 8898 | | 4548 | | 2057 | | |