








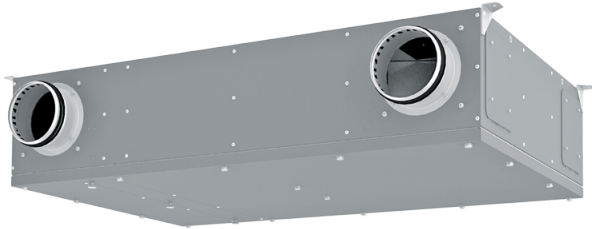

Series Uni

Hybrid decentralized universal installation type unit for single-room apartments with an air flow of up to 160 m³/h

- Heat exchanger type: Counter flow
- Sound insulation
- Motor type: EC
- Bypass: Auto
- BMS protocol: ModBus
- Control: Smartphone
- Casing material: Galvanized steel
- Humidity sensor: Optional
- Enthalpy heat exchanger



Lineup	Connected air duct size, mm	Rated power, W	Maximum airflow, m ³ /h	Service side	BMS protocol
 Uni R A14	125	58	160	Right	ModBus
 Uni L A14	125	58	160	Left	ModBus
 Uni ERV R A14	125	58	160	Right	ModBus
 Uni ERV L A14	125	58	160	Left	ModBus
 Uni R A21	125	58	160	Right	ModBus
 Uni L A21	125	58	160	Left	ModBus
 Uni ERV R A21	125	58	160	Right	ModBus

 Uni ERV L A21	125	58	160	Left	ModBus
---	-----	----	-----	------	--------