
Series **Uni**

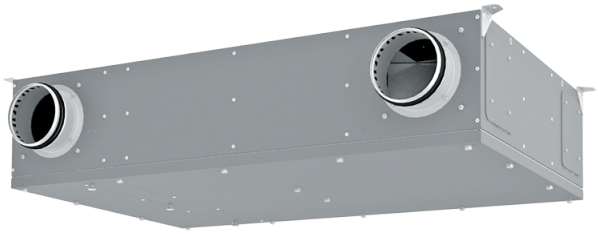

Hybrid decentralized universal installation type unit for single-room apartments with an air flow of up to 160 m³/h

- Heat exchanger type: Plate counterflow
- Heat exchanger material: Profiled polystyrene plates
- Sound-insulated casing
- Bypass: Auto
- BMS protocol: ModBus
- Casing material: Galvanized steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- PM2.5 sensor: Optional

Lineup	Connected air duct size, mm	Rated power, W	Maximum airflow, m³/h	Service side	BMS protocol
Uni R A14	125	58	160	Right	ModBus
Uni L A14	125	58	160	Left	ModBus
Uni ERV R A14	125	58	160	Right	ModBus
Uni ERV L A14	125	58	160	Left	ModBus
Uni R A21	125	58	160	Right	ModBus
Uni L A21	125	58	160	Left	ModBus
Uni ERV R A21	125	58	160	Right	ModBus

 Uni ERV L A21	125	58	160	Left	ModBus