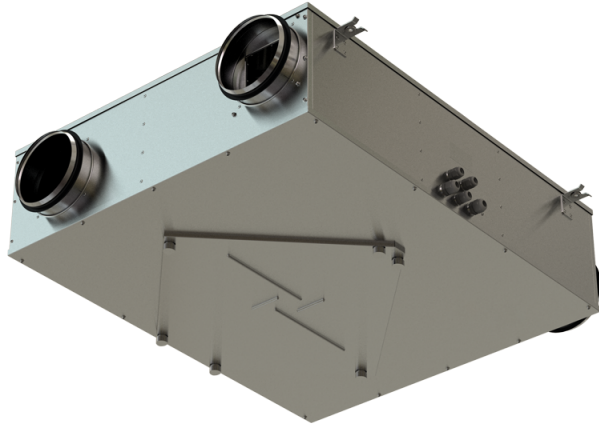








Series **VUE P3**











Heat recovery air handling units in heat- and sound-insulated casing

- Heat exchanger type: Cross flow
- Sound insulation
- Motor type: EC
- Enthalpy heat exchanger
- Control: Remote Control
- Casing material: Coated steel
- Bypass: Manual
- Humidity sensor: Optional

Lineup	Rated power, W	Maximum airflow, m ³ /h	Sound pressure level LpA at 3 m, dB(A)	Heat recovery efficiency, max, %	Service side	Control system	Bypass
 VUE 100 P3 R A3	76	160	47	87	Right	A3	✗
 VUE 200 P3 R A3	141	280	49	87	Right	A3	✗
 VUE 300 P3 R A3	193	340	52	87	Right	A3	✗
 VUE 450 P3 R A3	354	500	57	87	Right	A3	✗
 VUE 150 P3 A1	125	230	49	87	Right	A1	✗
 VUE 250 P3 A1	250	370	52	76	Right	A1	✗

 VUE 350 P3 A1	310	400	57	87	Right	A1	✘
 VUE 100 P3 L A3	76	160	47	87	Left	A3	✘
 VUE 100 P3 R A4	76	160	47	87	Right	A4	✘
 VUE 100 P3 L A4	76	160	47	87	Left	A4	✘
 VUE 200 P3 L A3	141	280	49	87	Left	A3	✘
 VUE 200 P3 R A4	141	280	49	87	Right	A4	✘
 VUE 200 P3 L A4	141	280	49	87	Left	A4	✘
 VUE 300 P3 L A3	193	340	52	87	Left	A3	✘
 VUE 300 P3 R A4	193	340	52	87	Right	A4	✘
 VUE 300 P3 L A4	193	340	52	87	Left	A4	✘
 VUE 450 P3 L A3	354	500	57	87	Left	A3	✘
 VUE 150 P3 A12	125	230	49	87	Right	A12	✘
 VUE 250 P3 A12	250	370	52	76	Right	A12	✘
 VUE 350 P3 A12	310	400	57	87	Right	A12	✘

 VUE 100 P3B EC R A14	66	170	30	82	Right	A14	✓
 VUE 100 P3B EC L A14	66	170	30	82	Left	A14	✓
 VUE 150 P3B EC R A14	83	215	32	82	Right	A14	✓
 VUE 150 P3B EC L A14	83	215	32	82	Left	A14	✓
 VUE 250 P3B EC R A14	84	300	36	73	Right	A14	✓
 VUE 250 P3B EC L A14	84	300	36	73	Left	A14	✓
 VUE 350 P3B EC R A14	171	430	46	85	Right	A14	✓
 VUE 350 P3B EC L A14	171	430	46	85	Left	A14	✓