

Series

KP-2...72S

Normally open fire-resisting duct damper with mechanical drive mechanism

Series

KP-2...PNP
KP-2...PVP
KP-2...PSP

Normally open fire-resisting duct damper with electric drive mechanism

Series

KP-2...PNP...-1
KP-2...PVP...-1
KP-2...PSP...-1

Normally open fire-resisting duct damper with simplified design with electric drive mechanism

Application

The fire dampers are intended for automatic closing of process openings and air duct penetrations in intermediate floors, walls and partitions, as well as closing of openings in supply and exhaust ducts of smoke ventilation systems. The dampers of this particular design are not suitable for installation in air ducts and ducts of premises with rated explosion and fire safety category A and B and in flammable and explosive mixture intakes. The KP-2 fire-resisting duct dampers are capable of resisting fire for at least 120 minutes (EI 120) at the temperature of 600 °C.

Conventional Designation:**Design**

The KP-2 series dampers are made in the general-purpose industrial version with a minimized variety of hardware components using low-alloy galvanized steel. The damper flap is made of fire-resistant material. The duct installation design results in two mounting flanges on the casing for integration into a ventilation ducts (air ducting) and external configuration of the drive mechanism for easier maintenance.

The KP-2...PNP/KP-2...PVP/KP-2...PSP dampers are equipped with a hot and cold zone baffle.

The KP-2...PNP...-1/KP-2...PVP...-1/KP-2...PSP...-1 dampers have a simplified construction:

- Simplified damper swing mechanism
- The zone baffle has been replaced by casing perforation covered with ceramic fibre material and aluminium foil tape
- New material and altered flap thickness.

Depending on the design variant the KP series dampers are equipped with:

- **Mechanical actuating unit with a thermal fuse and a return spring.**

The damper is set to the operating position upon the

KP-2-XxX-X-X-X-1**Series****Fire resistance**

2 – 2 hours

Damper flow area width

200; 250; 300; 400; 500; 600; 800; 1000

Damper flow area height

200; 250; 300; 400; 500; 600; 800; 1000

Number of flanges

1 – one

2 – two

Design variant

- 1 – simplified damper design
- _ – simple damper variant

Actuator location

SN – outside

VN – inside (except for dampers with a height or width less than 300 mm)

Actuator type

72S – thermal fuse and return spring (manual actuation)

PNP24T – 24 V NENUTEC electric actuator with a return spring

and a thermal breaker

PNP230T – 230 V NENUTEC electric actuator with a return spring

and a thermal breaker

PVP24T – 24 V BELIMO electric actuator with a return spring

and a thermal breaker

PVP230T – 230 V BELIMO electric actuator with a return spring

and a thermal breaker

PSP24T – 24 V SIEMENS electric actuator with a return spring

and a thermal breaker

PSP230T – 230 V SIEMENS electric actuator with a return spring

and a thermal breaker

thermal fuse breakdown resulting from a temperature increase. The damper can then be re-set to the protective position only manually by using a handle and by replacing the thermal fuse through the access hole. Emergency damper actuation: the flap remains in protective position (damper unaffected by fire) and is fixed by a thermal fuse (when the flap is installed in security position, a reverse spring is activated). Upon emergency actuation (damper directly affected by fire) the thermal fuse breaks down and the return spring moves the flap to operating position.

Upon an emergency activation (direct damper contact with fire) the thermal fuse breaks down enabling the

lock with releases the handle allowing the return spring to set the damper flap to the operating position.

► **Electric actuator with a built-in return spring and a back-up thermal breaker.**


Setting the damper to operating position (direct fire contact): remotely, via electric actuator.

The damper can be set to the operating or protective position either remotely via the control panel or manually using the manual cocking handle which is always included in the standard delivery set of the electric actuator. In case of the remote control panel failure, the back-up thermal breaker interrupts the power supply to the electric actuator and the return spring sets the


damper to the operating position. Emergency damper actuation: the damper flap is set to the protective position automatically (damper unaffected by fire).

The electric actuator remains energized at all times. In case of an emergency actuation (direct fire contact): the electric actuator equipped with a return spring is de-energized and the damper flap is set to the operating position by means of the spring energy. In case of a power failure not related to fire and its subsequent restoration at the actuator with a return spring, the damper flap returns to protective position.


■ **The KP-2...72S fire safety damper with a mechanical actuating unit with a thermal fuse and a return spring**

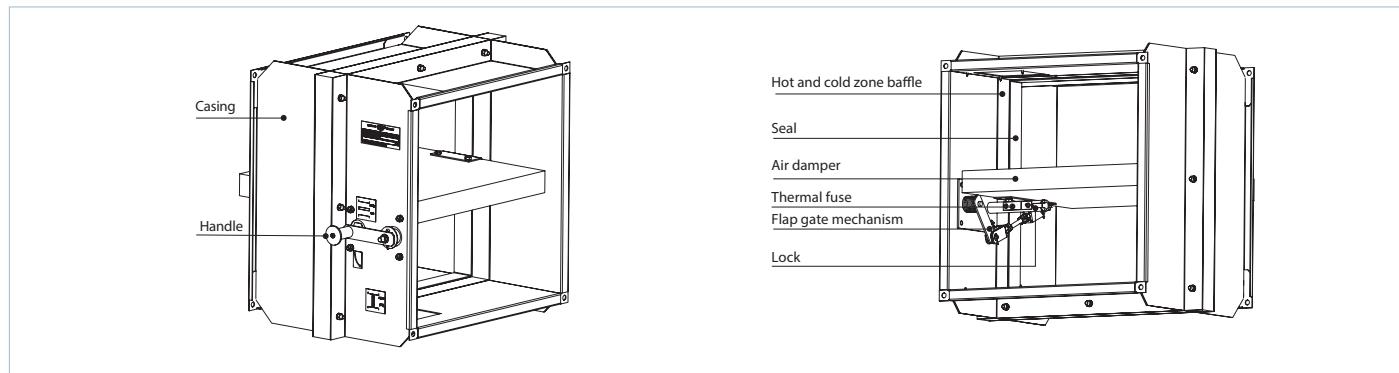

■ **The KP-2...PNP/KP-2...PVP/KP-2...PSP fire safety damper with BELIMO electric actuator and thermoelectric breaker**

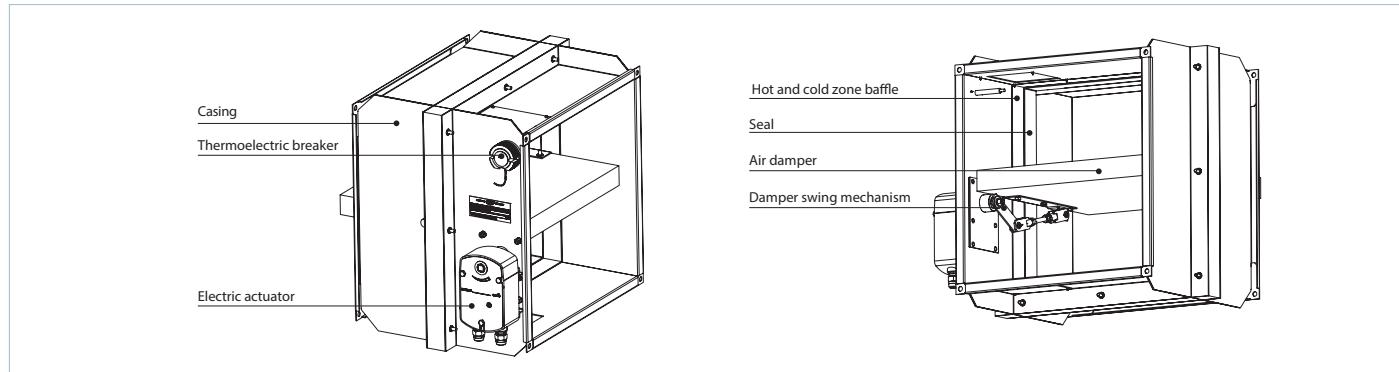

■ **The KP-2...PNP...-1/KP-2...PVP...-1/KP-2...PSP...-1 fire safety damper with BELIMO electric actuator and thermoelectric breaker**

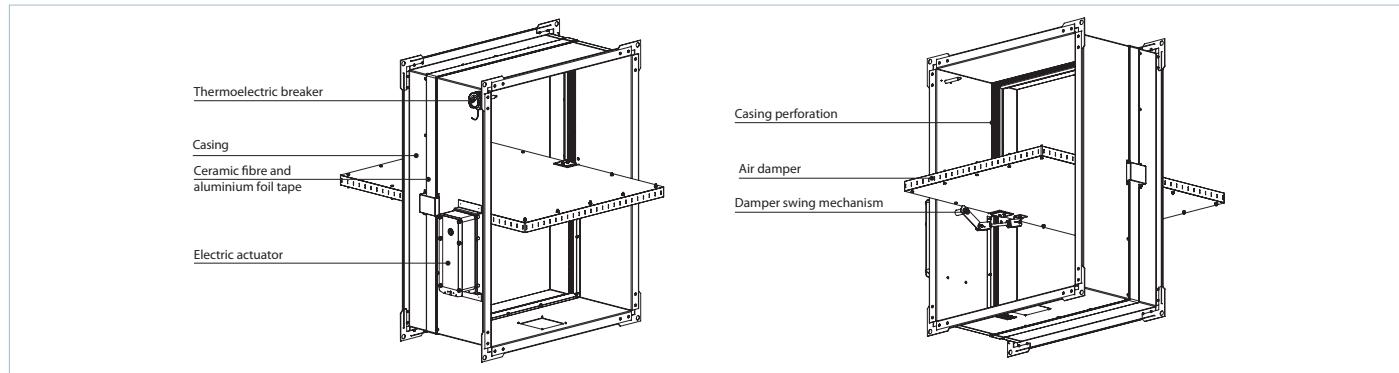

■ Mounting


The damper must be installed into the building envelope structure in accordance with the applicable standards and regulations. The seal fire resistance must be at least equal to that of the building envelope. The dampers can be installed in any position in vertical and horizontal ducts of fire-protection structures. The ducts for damper installation must be made in such a way so as to prevent the transfer of loads caused by the fire-protection structures to the damper casing. The adjoining air duct must be suspended in such a way so as to prevent the transfer of air duct load to the damper flange. The minimum free space for accessing the control parts

must be at least 350 mm. Make sure to arrange an inspection hole. While carrying out the installation consider size K. When two or more dampers are installed into the same fire-protection separation structure, the distance between the two adjacent dampers must be at least 200 mm. If such installation is not possible, the damper casing part between the fire-protection separation space and the damper flap must be insulated with a suitable material pursuant to the applicable standards. If such installation is not possible, the damper casing part between the fire-protection separation structure and the damper flap must be insulated with a suitable material pursuant to the applicable standards.

The damper control mechanism must be protected against damage and contamination. The damper casing must not deform any deformation during embedding. After the installation the flap must not catch against the damper casing while opening or closing.


The fire safety damper can be integrated into a tight wall structure - e.g. made of conventional concrete work of minimum width W = 100 mm or into a plasterboard wall of the necessary fire resistance class or into a tight ceiling structure - e.g. made of conventional concrete of minimum width W = 150 mm. Do not use any foaming substances for sealing the damper in the separation structure.

■ Installation recommendations for KP-2...72S dampers with a thermal fuse and a return spring




For sizes A and B please refer to the dimension table


– in vertical building structures

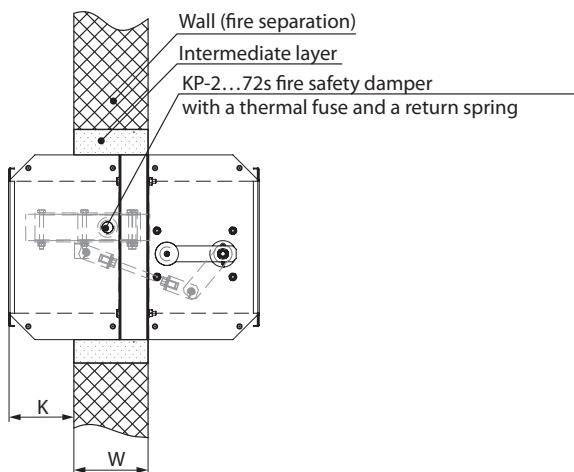


– in horizontal building structures

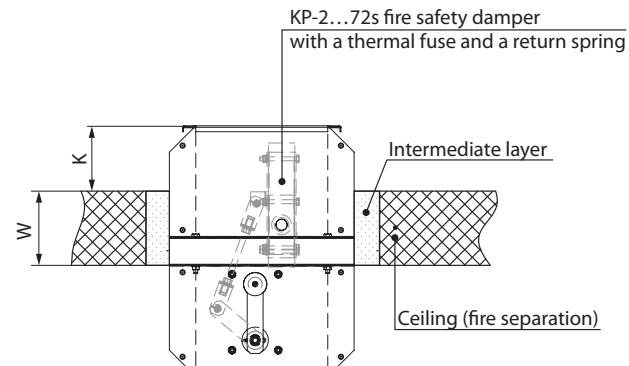

■ Installation recommendations for KP-2...PNP/KP-2...PVP/KP-2...PSP fire safety dampers with electric actuator and thermoelectric breaker

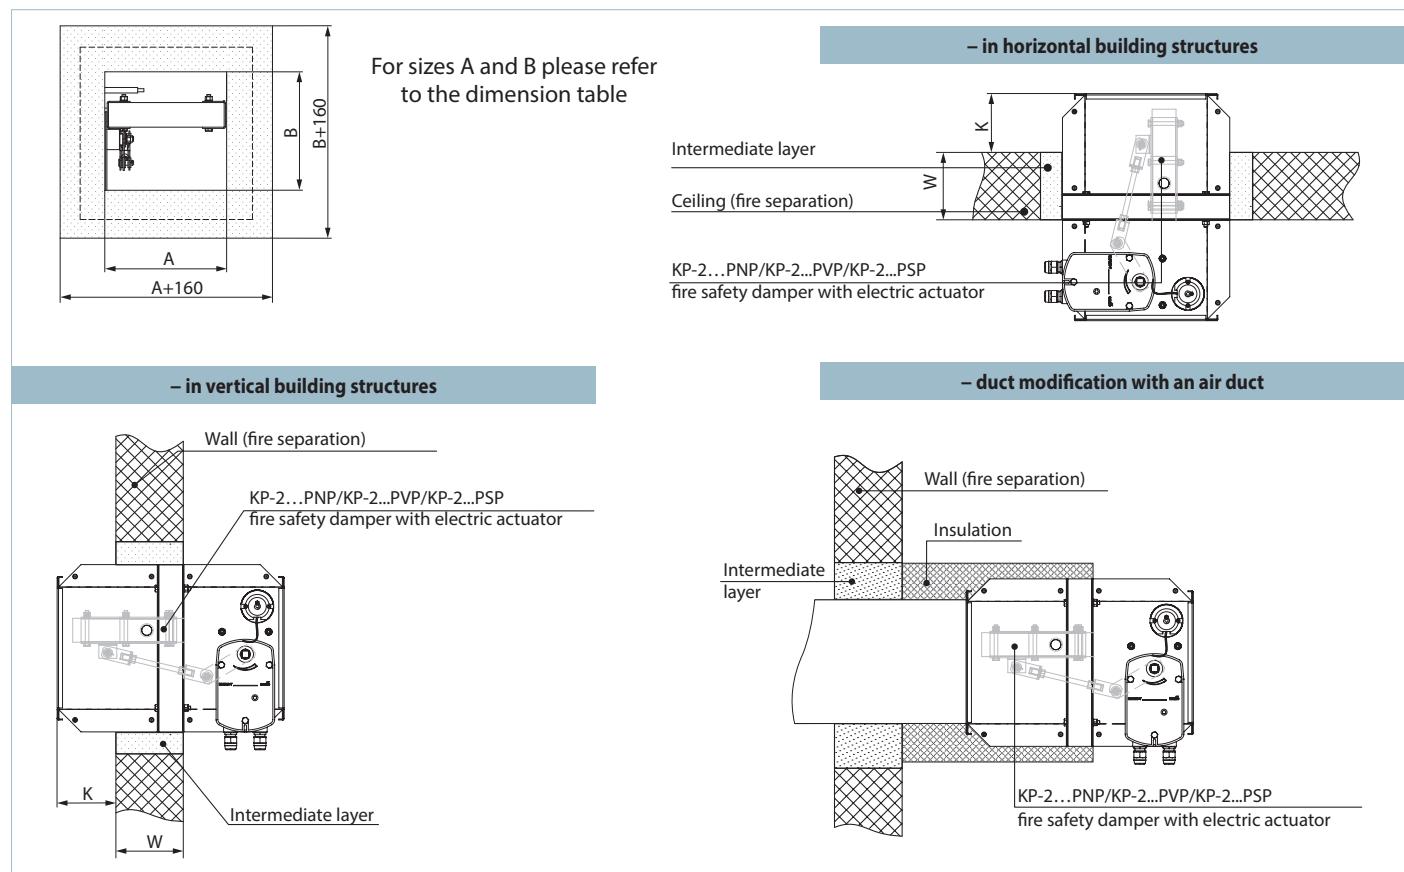


■ Installation recommendations for KP-2...PNP...-1/KP-2...PVP...-1/KP-2...PSP...-1 fire safety dampers with an electric actuator and thermoelectric breaker

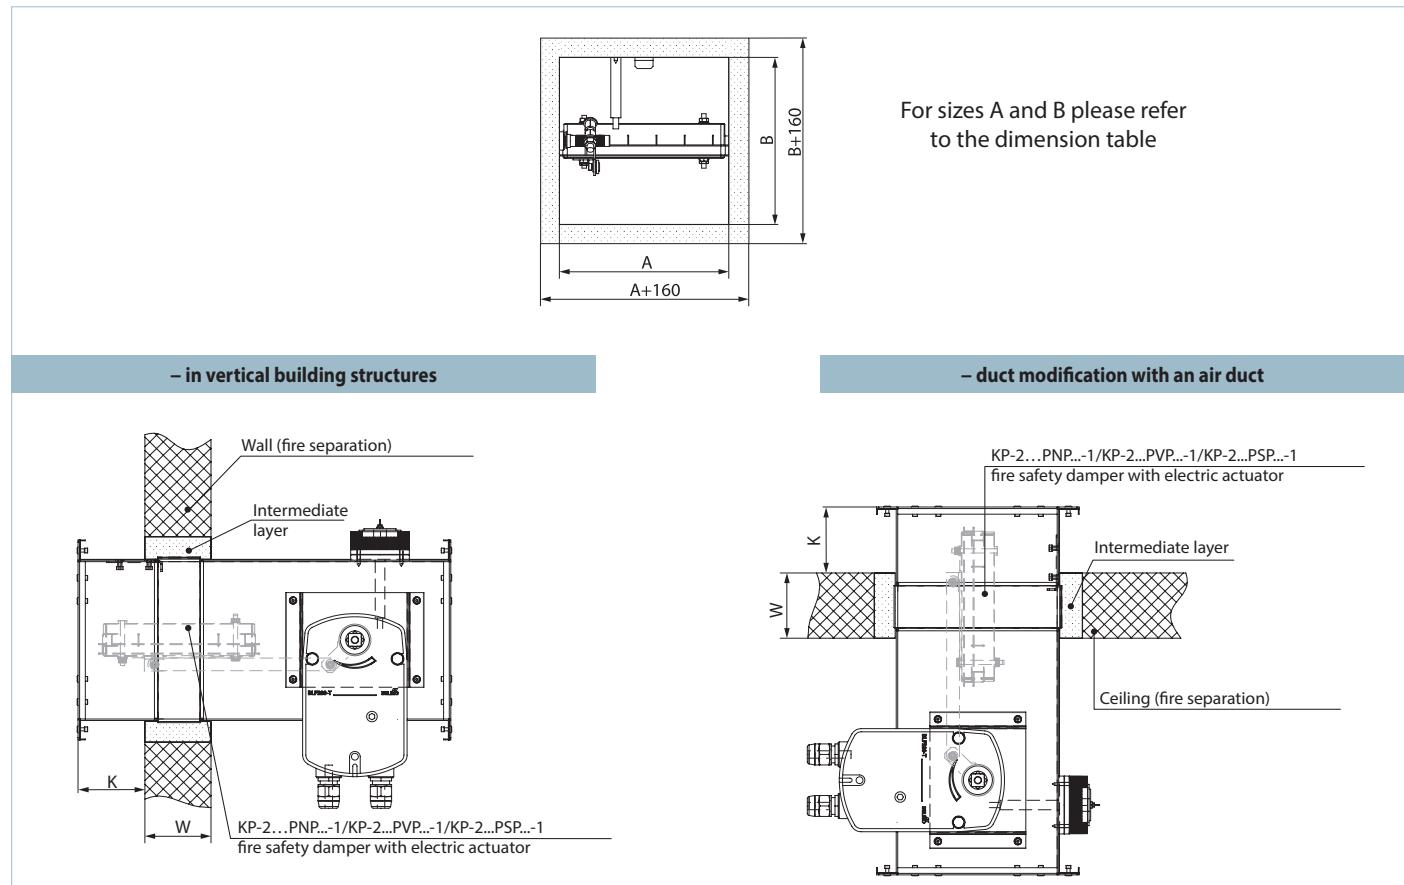

FIRE-RESISTING DAMPERS

■ Overall and connecting dimensions of KP-2...72S dampers with a mechanical actuator:

Duct cross-section	Dimensions [mm]									Weight [kg]
	A	A1	A2	A3	B	B1	B2	B3	S	
KP-2-200x200-2-72S-SN	200	220	240	280	200	220	240	280	315	12
KP-2-250x200-2-72S-SN	250	270	290	330	200	220	240	280	365	13
KP-2-250x250-2-72S-SN	250	270	290	330	250	270	290	330	365	14.1
KP-2-300x200-2-72S-SN	300	320	340	380	200	220	240	280	415	14
KP-2-300x250-2-72S-SN	300	320	340	380	250	270	290	330	415	15.3
KP-2-300x300-2-72S-SN	300	320	340	380	300	320	340	380	415	18.8
KP-2-400x250-2-72S-SN	400	420	440	480	250	270	290	330	515	19.2
KP-2-400x300-2-72S-SN	400	420	440	480	300	320	340	380	515	19.7
KP-2-400x400-2-72S-SN	400	420	440	480	400	420	440	480	515	22
KP-2-500x300-2-72S-SN	500	520	540	580	300	320	340	380	615	22.5
KP-2-500x400-2-72S-SN	500	520	540	580	400	420	440	480	615	24.7
KP-2-500x500-2-72S-SN	500	520	540	580	500	520	540	580	615	29.8
KP-2-600x400-2-72S-SN	600	620	640	680	400	420	440	480	715	29.7
KP-2-600x500-2-72S-SN	600	620	640	680	500	520	540	580	715	36
KP-2-600x600-2-72S-SN	600	620	640	680	600	620	640	680	715	38

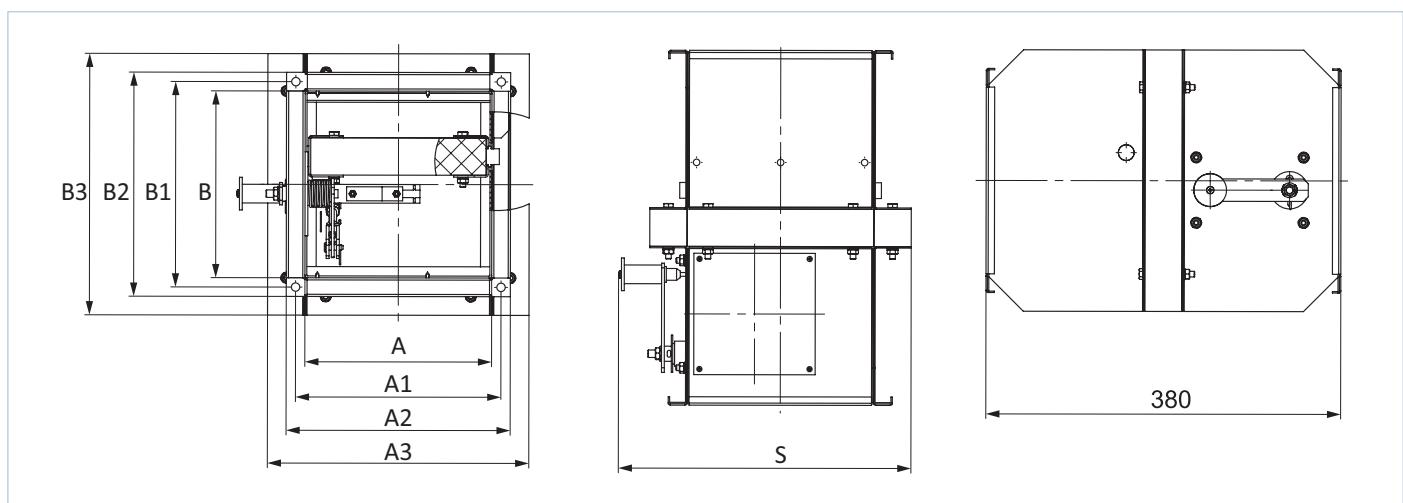

**Flow area of fire-resisting duct damper
with a mechanical actuator [m²]**


S2/S1	200	250	300	400	500	600
200	0.032					
250	0.04	0.053				
300	0.048	0.063	0.078			
400	0.064	0.084	0.104	0.144		
500	0.08	0.105	0.13	0.18	0.23	
600	0.096	0.126	0.156	0.216	0.276	0.336

Dampers with dimensions not included in the table can be produced on request.

Limit damper size: 600x600.

■ Overall and connecting dimensions of KP-2....PNP/KP-2...PVP/KP-1...PSP dampers with electric actuators:

Duct cross-section	Dimensions [mm]									Weight [kg]
	A	A1	A2	A3	B	B1	B2	B3	S	
KP-2-200x200-2...-SN	200	220	240	280	200	220	240	280	340	13.3
KP-2-250x200-2...-SN	250	270	290	330	200	220	240	280	390	14.3
KP-2-250x250-2...-SN	250	270	290	330	250	270	290	330	390	15.4
KP-2-300x200-2...-SN	300	320	340	380	200	220	240	280	440	15.3
KP-2-300x250-2...-SN	300	320	340	380	250	270	290	330	440	16.6
KP-2-300x300-2...-SN	300	320	340	380	300	320	340	380	440	20.1
KP-2-400x250-2...-SN	400	420	440	480	250	270	290	330	540	20.5
KP-2-400x300-2...-SN	400	420	440	480	300	320	340	380	540	21
KP-2-400x400-2...-SN	400	420	440	480	400	420	440	480	540	23.3
KP-2-500x300-2...-SN	500	520	540	580	300	320	340	380	640	23.8
KP-2-500x400-2...-SN	500	520	540	580	400	420	440	480	640	26
KP-2-500x500-2...-SN	500	530	560	580	500	530	560	580	650	33
KP-2-600x400-2...-SN	600	620	640	680	400	420	440	480	740	32.7
KP-2-600x500-2...-SN	600	630	660	680	500	530	560	580	750	38.4
KP-2-600x600-2...-SN	600	630	660	680	600	630	660	680	750	43
KP-2-800x500-2...-SN	800	830	860	880	500	530	560	580	950	47
KP-2-800x600-2...-SN	800	830	860	880	600	630	660	680	950	52
KP-2-800x800-2...-SN	800	830	860	880	800	830	860	880	950	63
KP-2-1000x600-2...-SN	1000	1030	1060	1080	600	630	660	680	1150	63
KP-2-1000x800-2...-SN	1000	1030	1060	1080	800	830	860	880	1150	75
KP-2-1000x1000-2...-SN	1000	1030	1060	1080	1000	1030	1060	1080	1150	87

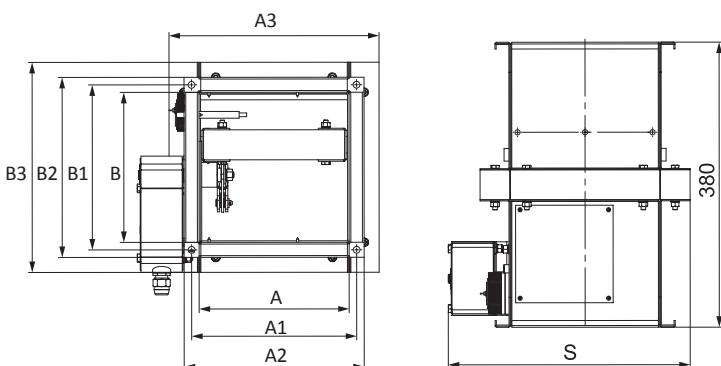

Note: The values given in the table for dampers with BF230-T/BLF230-T actuators are identical for those equipped with BF24-T/BLF24-T actuators.


Flow area of the duct fire-resistant damper with an electric actuator installed outside the damper [m^2]

S2/S1	200	250	300	400	500	600	800	1000
200	0.032							
250	0.04	0.053						
300	0.048	0.063	0.078					
400	0.064	0.084	0.104	0.144				
500	0.08	0.105	0.13	0.18	0.23			
600	0.096	0.126	0.156	0.216	0.276	0.336		
800	0.128	0.168	0.208	0.288	0.368	0.448	0.608	
1000	0.16	0.21	0.26	0.36	0.46	0.56	0.76	0.96

Dampers with dimensions not included in the table can be produced on request.
Limit damper size: 1000x1000.

■ Overall and connecting dimensions of KP-2....PNP...-1/KP-2...PVP...-1/KP-1...PSP...-1 dampers with electric actuators:

Duct cross-section	Dimensions [mm]							Weight [kg]
	A	A1	A2	A3	B	B1	B2	
KP-2-200x200-2...-SN-1	200	220	240	340	200	220	240	5.7
KP-2-250x200-2...-SN-1	250	270	290	390	200	220	240	6.2
KP-2-250x250-2...-SN-1	250	270	290	390	250	270	290	6.9
KP-2-300x200-2...-SN-1	300	320	340	440	200	220	240	6.8
KP-2-300x250-2...-SN-1	300	320	340	440	250	270	290	7.5
KP-2-300x300-2...-SN-1	300	320	340	440	300	320	340	9.2
KP-2-400x250-2...-SN-1	400	420	440	540	250	270	290	9
KP-2-400x300-2...-SN-1	400	420	440	540	300	320	340	10.8
KP-2-400x400-2...-SN-1	400	420	440	540	400	420	440	12.6
KP-2-500x300-2...-SN-1	500	520	540	640	300	320	340	12.3
KP-2-500x400-2...-SN-1	500	520	540	640	400	420	440	14.3
KP-2-500x500-2...-SN-1	500	530	560	650	500	530	560	23
KP-2-600x400-2...-SN-1	600	620	640	740	400	420	440	16.2
KP-2-600x500-2...-SN-1	600	630	660	750	500	530	560	25.6
KP-2-600x600-2...-SN-1	600	630	660	750	600	630	660	28.6
KP-2-800x500-2...-SN-1	800	830	860	950	500	530	560	31.3
KP-2-800x600-2...-SN-1	800	830	860	950	600	630	660	34.7
KP-2-800x800-2...-SN-1	800	830	860	950	800	830	860	42
KP-2-1000x600-2...-SN-1	1000	1030	1060	1150	600	630	660	40.7
KP-2-1000x800-2...-SN-1	1000	1030	1060	1150	800	830	860	50.2
KP-2-1000x1000-2...-SN-1	1000	1030	1060	1150	1000	1030	1060	58

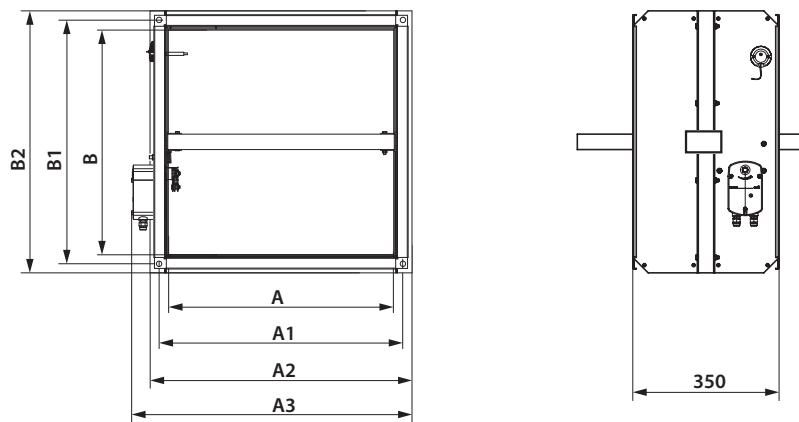

Note: The values given in the table for dampers with BF230-T/BLF230-T actuators are identical for those equipped with BF24-T/BLF24-T actuators.

**Flow area of the duct fire-resistant damper
with an electric actuator installed outside the damper [m²]**

A/B	200	250	300	400	500	600	800	1000
200	0.032							
250	0.04	0.053						
300	0.048	0.063	0.078					
400	0.064	0.084	0.104	0.144				
500	0.08	0.105	0.13	0.18	0.23			
600	0.096	0.126	0.156	0.216	0.276	0.336		
800	0.128	0.168	0.208	0.288	0.368	0.448	0.608	
1000	0.16	0.21	0.26	0.36	0.46	0.56	0.76	0.96

Dampers with dimensions not included in the table can be produced on request.

Limit damper size: 1000x1000.

■ Main technical specifications of BELIMO electric actuators with a return spring and a thermal breaker

Technical data	Basic models		Models with increased torque		Models with the highest torque			
Rated operation voltage	AC/DC 24 V	AC 230 V	AC/DC 24 V	AC 230 V	AC/DC 24 V	AC 230 V		
Permissible operating voltage tolerance	AC 19.2...28.8 V DC 21.6...28.8 V	AC 198...264 V	AC 19.2...28.8 V DC 21.6...28.8 V	AC 198...264 V	AC 19.2...28.8 V DC 21.6...28.8 V	AC 198...264 V		
AC mains frequency	50/60 Hz							
Power consumption at rest [W]	0.8	1.1	1.4	2.1	2	3		
Power consumption in operation [W]	2.5	3.5	4	5	7	8.5		
Maximum design capacity [VA]	4	6.5	6	10	10	11		
Motor torque [Nm]	4		9		18			
Spring torque [Nm]	3		7		12			
Protection class	III	II	III	II	III	II		
Ingress protection rating	IP54							
Auxiliary switches	2 pcs., single-pole, reversible 1 mA...3 (0.5) A, AC 250 V				2 pcs., single-pole, reversible, 1 mA...6(3)A, AC 250 V			
Electric motor connection cable	1 m, 2 x 0.75 mm ² (halogen-free)							
Auxiliary switch connection cable	1 m, 6 x 0.75 mm ² (halogen-free)							
Running time spring	20 seconds at -10...+55 °C < 60 seconds at -30...-10 °C				16 seconds at +20 °C			
Running time motor	< 60 s/90°				< 120 s/90°			
Response temperature of thermal breaker sensors	Duct sensor 72 °C Outdoor sensor 72 °C							
Service life	Min. 60 000 emergency positions							
Technical maintenance	Not required							


■ Main technical specifications of NENUTEC electric actuators with a return spring and a thermal breaker

Technical data	Basic models		Models with increased torque	
Rated operation voltage	AC/DC 24 V	AC 230 V	AC/DC 24 V	AC 230 V
Permissible operating voltage tolerance	AC/DC 21.8...26.4 V	AC 209...253 V	AC/DC 21.8...26.4 V	AC 209...253 V
AC mains frequency	50/60 Hz			
Power consumption in rest position [W]	2.5			2
Power consumption in operation [W]	7			10
Maximum design capacity [VA]	10			10
Motor torque [Nm]	5			8
Spring torque [Nm]				
Protection class	III	II	III	II
Ingress protection rating	IP54			
Auxiliary switches	2 pcs., single-pole, reversible, 3 (1.5) A, AC 250 V			
Electric motor connection cable	1 m, 2 x 0.75 mm ² (halogen-free)			
Auxiliary switch connection cable	1 m, 6 x 0.75 mm ² (halogen-free)			
Running time spring	50...70 s (return spring < 20 s)		75...90 s (return spring < 25 s)	
Service life	60 000 emergency positions			

■ Main technical specifications of Siemens electric actuators with a return spring and a thermal breaker

Technical data	Basic models		Models with increased torque		Models with the highest torque	
Rated operation voltage	AC 24 V/ DC 24...48 V	AC 230 V	AC 24 V/ DC 24...48 V	AC 230 V	AC 24 V/ DC 24...48 V	AC 230 V
Permissible operating voltage tolerance	AC/DC ±20 %	AC ±15 %	AC/DC ±20 %	AC ±15 %	AC/DC ±20 %	AC ±15 %
AC mains frequency	50/60 Hz					
Power consumption at rest [W]	2	3.5	2	3.5	3	4
Power consumption in operation [W]	3.5	4.5	3.5	4.5	5	6
Maximum design capacity [VA]	5	7	5	7	7	8
Motor torque [Nm]	4		9		18	
Spring torque [Nm]	4		7		18	
Protection class	III	II	III	II	III	II
Ingress protection rating	IP54					
Auxiliary switches	2 pcs., single-pole, reversible, 6(2)A, AC 24...250 V					
Electric motor connection cable	0.9 m, 2 x 0.75 mm ² (halogen-free)					
Auxiliary switch connection cable	0.9 m, 6 x 0.75 mm ² (halogen-free)					
Running time spring	15 seconds < 60 seconds at -30...-10 °C					
Running time motor	90 s/90°					
Response temperature of thermal breaker sensors	Duct sensor 72 °C Outdoor sensor 72 °C					
Service life	10 000 emergency positions					
Technical maintenance	Not required					

■ Electrical connection of the basic models of BELIMO and NENUTEC electric actuators, as well as BELIMO and NENUTEC models with increased torque

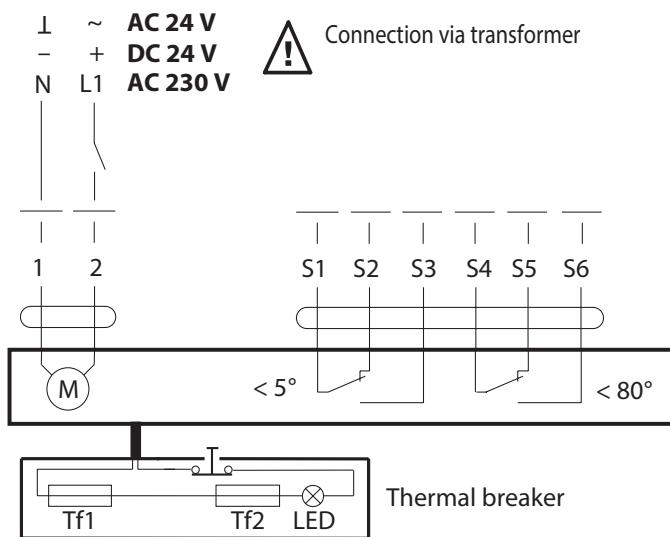

■ Electrical connection of BELIMO electric actuators with the highest torque, as well as Siemens electric actuators

