

SO 125 TH L




Axial decorative fans for exhaust ventilation

- Maximum airflow: 174
- Sound pressure level LpA at 3 m: 35
- Motor type: AC
- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Humidity sensor
- Timer: Turn off timer

| | Unit of measurement | SO 125 TH L |
|---------------------------------|---------------------|-------------|
| Connected air duct size | mm | 125 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 17.5 |
| Unit current | A | 0.117 |
| Maximum airflow | m ³ /h | 174 |
| Sound pressure level LpA at 3 m | dB(A) | 35 |
| Weight | kg | 0.74 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 45 |
| Ingress protection rating | - | IP24 |

Dimensions

| ØD | B | L | L1 |
|-----|-----|-----|----|
| 125 | 177 | 122 | 34 |

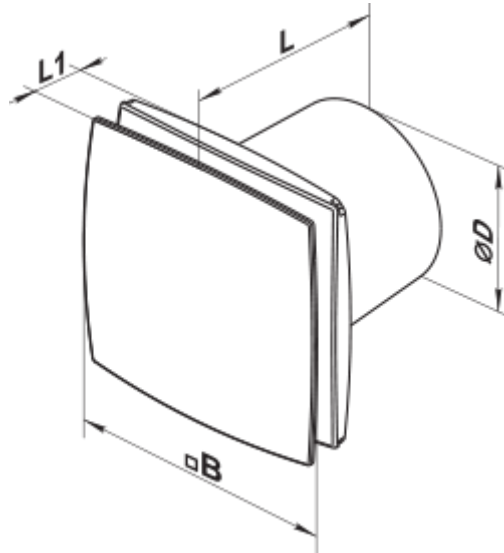

Accessories

Speed controllers

| Name | Photo | Description |
|--------------------------|--|------------------|
| RS-1-300 |  | Speed controller |

Flat duct

| Name | Photo | Description |
|----------------------|---|---------------------------------------|
| 2121 |  | Connection of same diameter air ducts |

Cooker Hoods

| Name | Photo | Description |
|------------------------|---|--|
| FO 125 |  | The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF |