


# 150 MA turbo



Axial fans with automatic louver shutters for exhaust ventilation

- Maximum airflow: 345
- Sound pressure level LpA at 3 m: 41
- Motor type: AC
- Casing material: Polypropylene/Thermoplastic elastomer

	Unit of measurement	150 MA turbo
Connected air duct size	mm	150
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	32
Unit current	A	0.13
Maximum airflow	m <sup>3</sup> /h	345
Sound pressure level LpA at 3 m	dB(A)	41
Weight	kg	0.99
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IP24

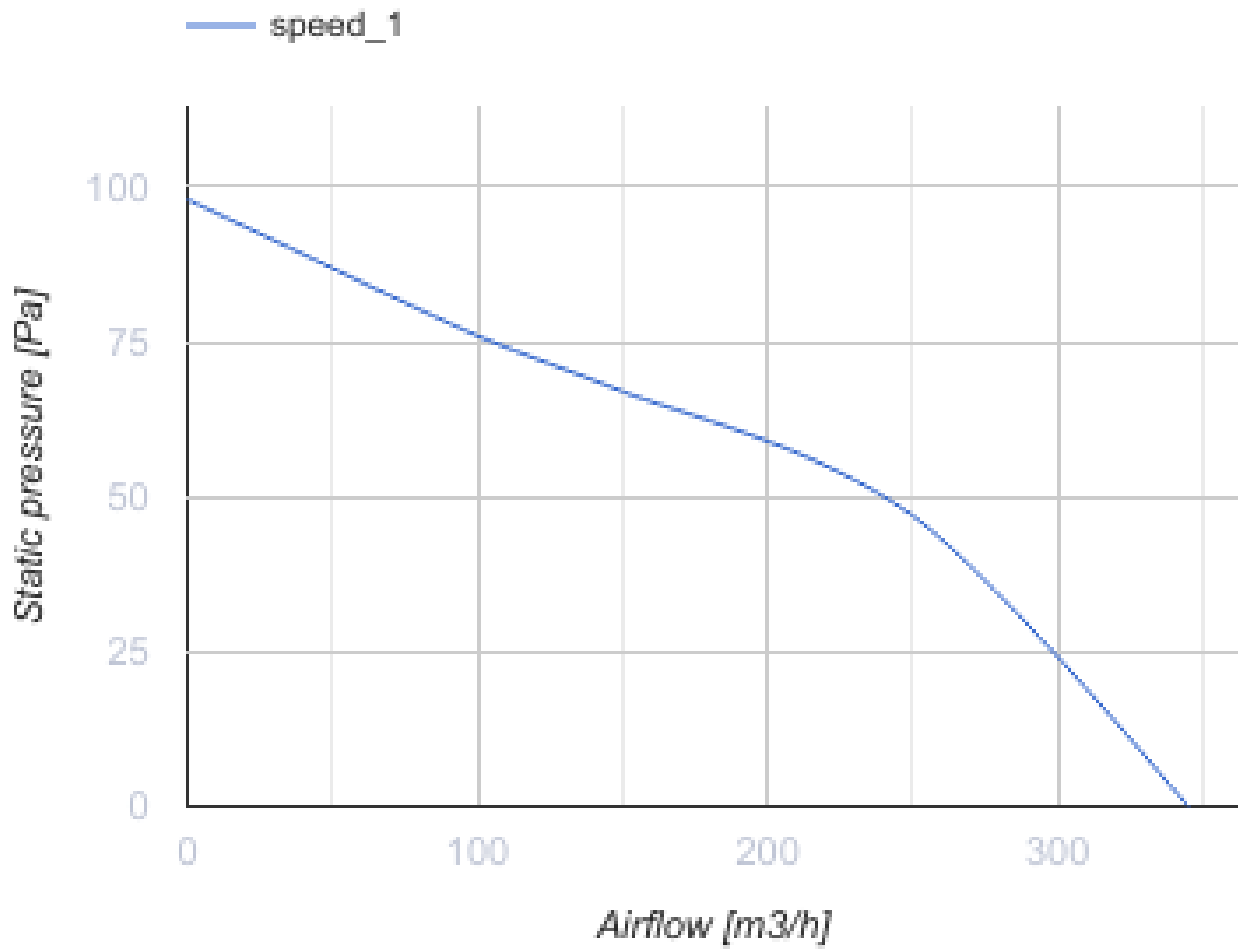


### Dimensions

∅D	B	B1	B2	H	L	L1
150	212	196	150	195	114	33




## Accessories

### Flanges

Name	Photo	Description
<a href="#">FO 150</a>		The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF

## Ecodesign

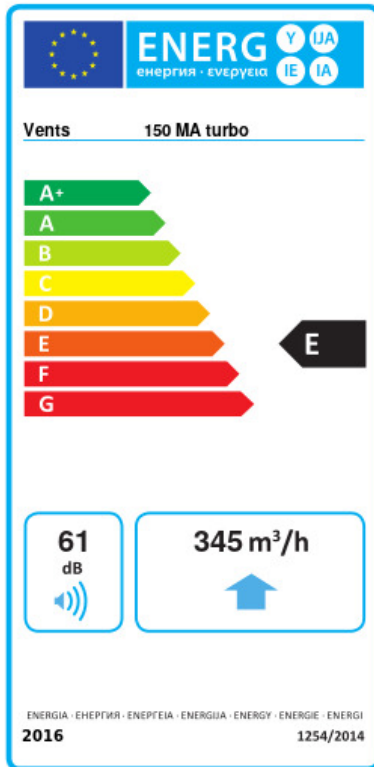

Trademark	Vents					
Model	150 MA turbo					
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold		Average		Warm	
	-31.7	B	-15.3	E	-5.9	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Multi-speed					
Type of heat recovery system	None					
Maximum flow rate (m <sup>3</sup> /h)	345					
Electric power input (W)	32					
Reference flow rate (m <sup>3</sup> /s)	0.067					
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.06					
Control typology	Manual control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	61					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	75		75		75	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	3355		1715		776	