

# 150 Silenta-ST



Low noise and low watt axial fans for exhaust ventilation

- Maximum airflow: 240
- Sound pressure level LpA at 3 m: 33
- Motor type: AC
- Impeller type: Axial
- Casing material: Plastic
- Timer: Turn off timer


	Unit of measurement	150 Silenta-ST
Connected air duct size	mm	150
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	20
Unit current	A	0.14
Maximum airflow	m <sup>3</sup> /h	240
Sound pressure level LpA at 3 m	dB(A)	33
Weight	kg	0.85
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IP34

## Dimensions

Ø D	B	H	L	L1
150	205	165	132	14



## Ecodesign

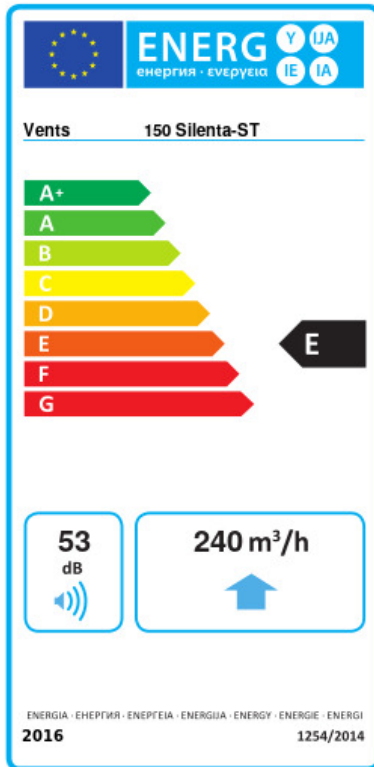

Trademark	Vents					
Model	150 Silenta-ST					
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold		Average		Warm	
	-35.1	A	-17.2	E	-6.9	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Multi-speed					
Type of heat recovery system	None					
Maximum flow rate (m <sup>3</sup> /h)	240					
Electric power input (W)	20					
Reference flow rate (m <sup>3</sup> /s)	0.047					
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.054					
Control typology	Clock control					
Maximum external leakage rates (%)	2.7					
Sound power level (dB(A))	53					
Declared typology	RVU UVU					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	62		62		62	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	3667		1874		848	