



# Boost-I 400 EC



Mixed-type duct fans with EC motors in casing with noise and heat insulation


- Maximum airflow: 5415
- Sound pressure level LpA at 3 m: 49
- Sound insulation
- Motor type: EC
- Impeller type: Mixed-flow
- Casing material: Galvanized steel
- Installation in any position

	Unit of measurement	Boost-I 400 EC
Connected air duct size	mm	400
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	726
Unit current	A	4.8
Maximum airflow	m <sup>3</sup> /h	5415
rotation speed at 50hz	-	2580
Sound pressure level LpA at 3 m	dB(A)	49
Weight	kg	22.8
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

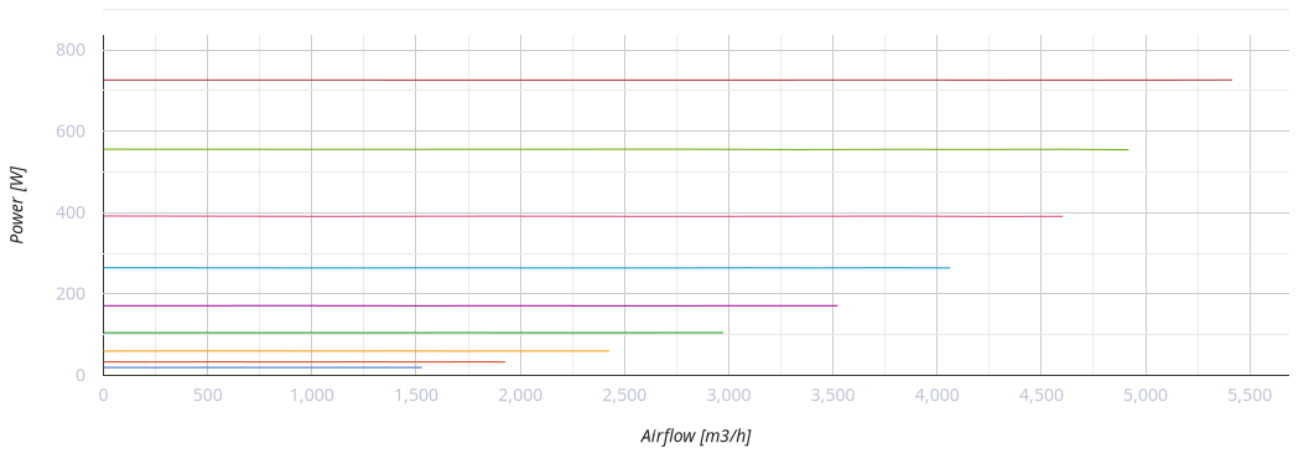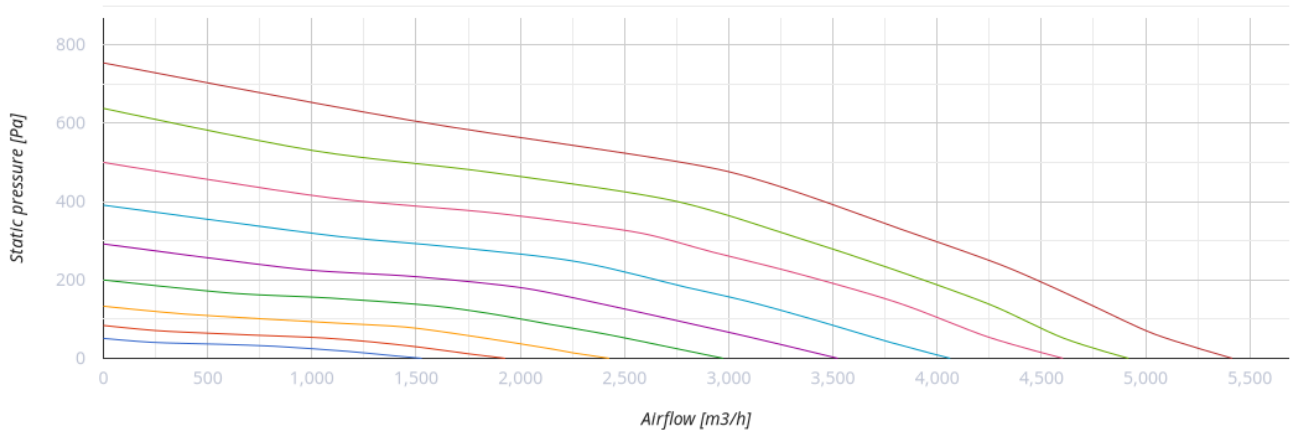

## Dimensions

$\varnothing D$	$\varnothing D1$	B	L	L1
399	460	517	648	785

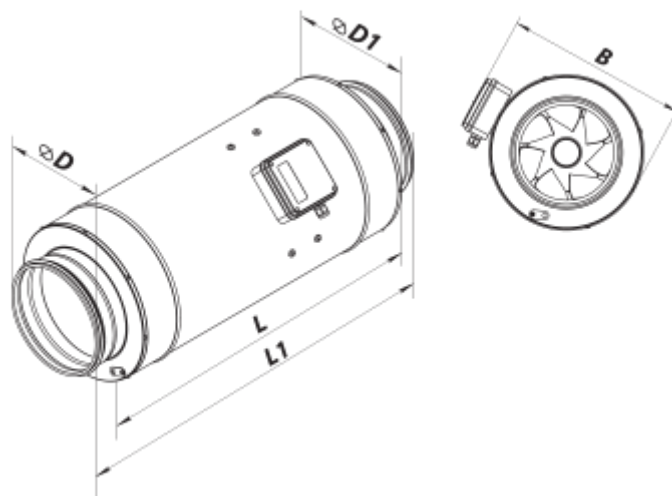



## Accessories

### For round ducts

Name	Photo	Description
<a href="#">KR 400</a>		Air damper for air flow control in round air ducts

### For round ducts

Name	Photo	Description
<a href="#">SR 400/1200</a>		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
<a href="#">SR 400/900</a>		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems

### Speed controllers

Name	Photo	Description
<a href="#">R-1/010</a>		Speed controller for EC motors

## Ecodesign

Trademark	Vents
Model	Boost-I 400 EC
Type of drive installed	Integrated VSD
Type of heat recovery system	None
Nominal flow rate (m <sup>3</sup> /s)	1.103
Nominal external pressure (Pa)	298
Maximum external leakage rates (%)	2.7
Static efficiency (%)	45.9
Effective electric power input (kW)	0.73
Sound power level (dB(A))	68
Declared typology	NRVU UVU