DVUT 1200 HB EC R A21 V.2



School floor-mounted AHUs

- Sound pressure level LpA at 3 m: 30
- Sound pressure level LpA at 1 m: 40
- Heat exchanger type: Counter flow
- Heat exchanger material: Polystyrene
- Supply filter: ISO ePM1 60% (F7)
- Extract filter: ISO Coarse >60% (G4)
- Sound-insulated casing
- Bypass: Auto
- BMS protocol: ModBus
- Control: Smartphone
- Casing material: Coated steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- PM2.5 sensor: Optional
- Temperature sensor

	Unit of measurement	DVUT 1200 HB EC R A21 V.2
Connected air duct size	mm	400
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	345
Unit current	A	2.3
Maximum airflow	m³/h	1240
Sound pressure level LpA at 3 m	dB(A)	30
Sound pressure level LpA at 1 m	dB(A)	40
Heat recovery efficiency, max	%	96
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	352
Supply filter	-	ISO ePM1 60% (F7)
Extract filter	-	ISO Coarse >60% (G4)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1

Ambient air temperature max	°C	40
Ingress protection rating	-	IP20
Ambient air humidity max	%	60
Ingress protection rating of the drive	-	IP44
Minimum wall thickness	mm	100
Maximum wall thickness	mm	2000

Dimensions

H	H1	D	H3	H4	H5	L	L1	L2	L3
2106	2000	400	545	1110	70	1900	1951	265	535

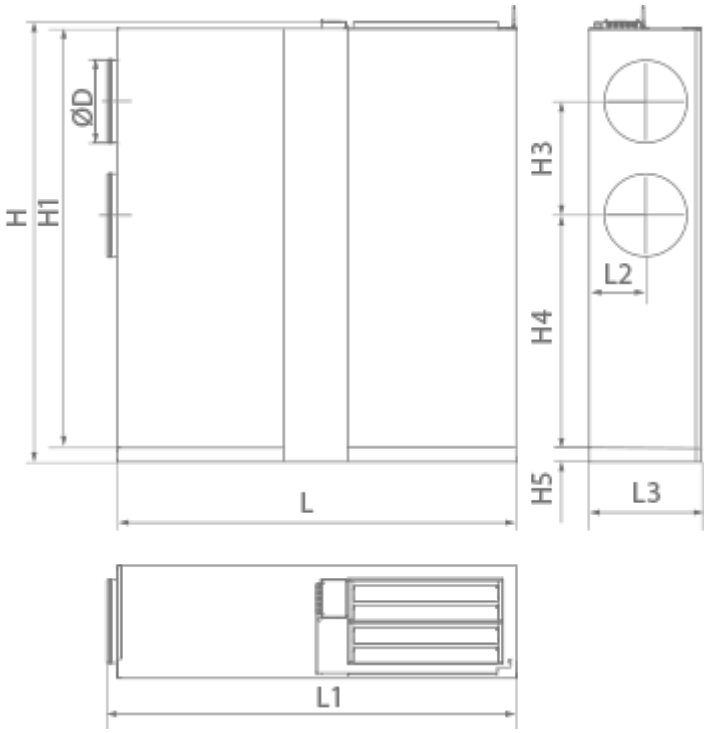

Accessories

Sensors

Name	Photo	Description
HV2		Humidity sensor
CO2-1		CO2 sensors
CO2-2		CO2 sensors

HR-S		Electro-mechanical humidistat
DPWC11200		Humidity sensor
CO2-3		CO2 sensor

VOC sensors

Name	Photo	Description
DPWQ30600		VOC sensors

CO2 sensors

Name	Photo	Description
DPWQ40200		CO2 sensor

Condensation drainage

Name	Photo	Description
SH-32		Hydraulic U-trap to drain condensate from heat exchangers and coolers
DN-2		Drain pump for pumping out and draining condensation

Other accessories

Name	Photo	Description
NB DVUT 1200 HB chrome		Outer ventilation hood
NB DVUT 1200 HB white		Outer ventilation hood
SF 540x450x48 F7		F7 panel filter

SF 450x395x48 G4		Panel filter G4