

Micra 200 E2 ERV WiFi




MICRA 200 ERV WiFi is a single-room energy-efficient air handling unit intended for decentralised ventilation of residential and commercial spaces as well as apartments and houses


- Power of electrical preheater: 650
- Power of electrical reheater: 700
- Maximum airflow: 200
- Sound pressure level LpA at 3 m: 45
- Heat recovery efficiency: 85
- Heat exchanger type: Counter flow
- Extract filter: G4
- Supply filter: G4 + F7 (H13 option)
- Sound insulation
- Motor type: EC
- Enthalpy heat exchanger
- Bypass: Auto
- Reheater: Electric
- Preheater: Electric
- Control: Smartphone
- Casing material: Polypropylene/Thermoplastic elastomer
- Humidity sensor: Optional
- CO2 sensor: Optional
- Temperature sensor: Built-in

	Unit of measurement	Micra 200 E2 ERV WiFi				
Connected air duct size	mm	100				
Speed	-	5				
Minimum supply voltage	V	230				
Maximum supply voltage	V	230				
Power supply frequency	Hz	50/60				
Rated power	W	10	15	25	44	134
Power of electrical preheater	W	650				
Power of electrical reheater	W	700				
Unit current	A	7.2				
Maximum airflow	m ³ /h	30	60	90	120	200
Sound pressure level LpA at 3 m	dB(A)	12	22	30	36	45
Heat recovery efficiency	%	85	81	75	68	66
Heat exchanger type	-	Counter flow				
Heat exchanger material	-	Enthalpy				
Weight	kg	55				
Extract filter	-	G4				
Supply filter	-	G4 + F7 (H13 option)				
Transported air temperature (max)	°C	40				
Transported air temperature (min)	°C	-15				

Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	60
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

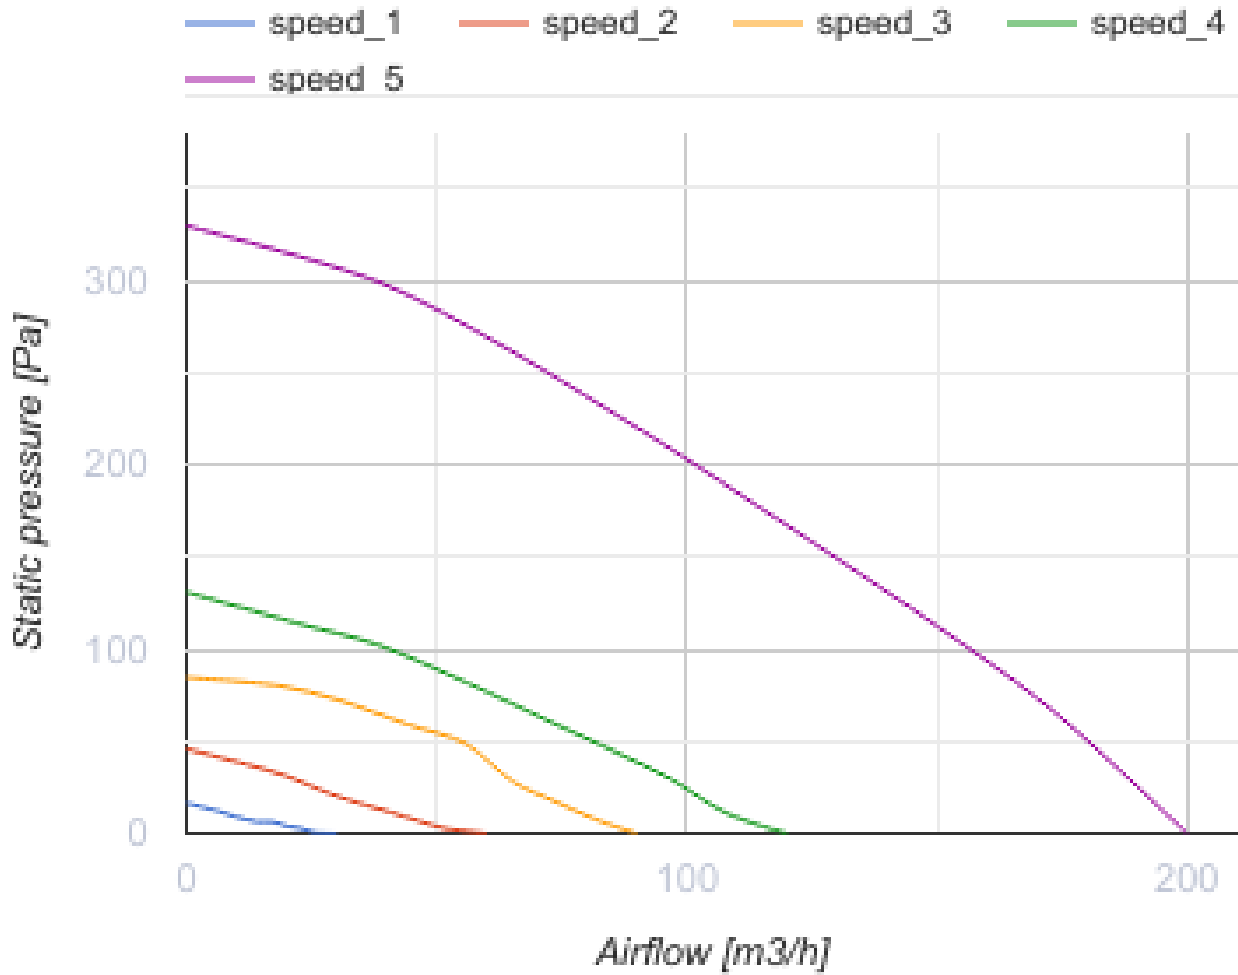



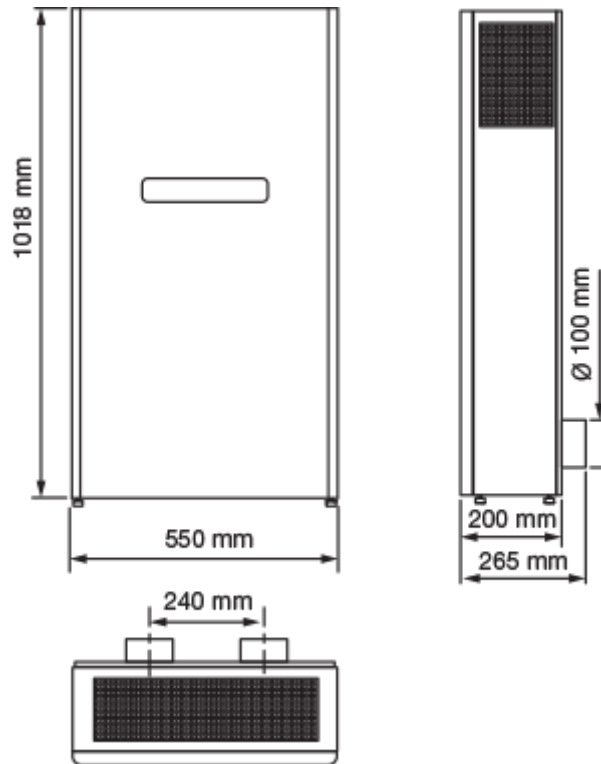





Dimensions





Accessories

Other accessories


Name	Photo	Description
NB Micra 200 chrome		Outdoor box
NB Micra 200 white		Outdoor box
SF 201x162x20 G4		Panel filter G4
SF 243x162x20 G4		Panel filter G4
SF 502x162x40 F7		F7 panel filter
MK Micra 200 chrome		Mounting kit: Two plastic air ducts; Outdoor box; Cardboard template
MK Micra 200 white		Mounting kit: Two plastic air ducts; Outdoor box; Cardboard template

SF 502x162x40 H13		H13 HEPA filter
-------------------	---	-----------------

Sensors

Name	Photo	Description
CO2-1		CO2 sensors
CO2-2		CO2 sensors

Ecodesign

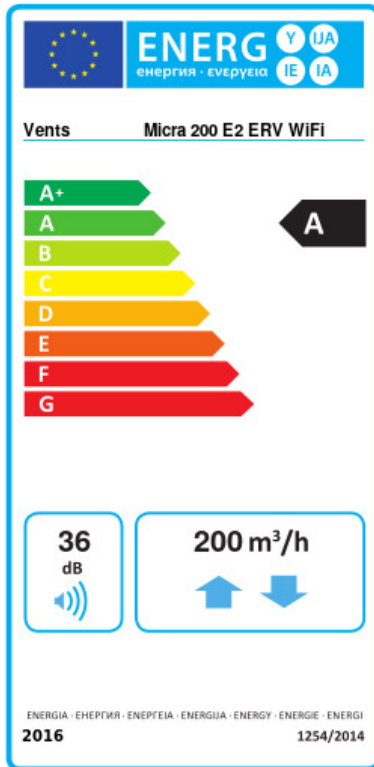

Trademark	Vents					
Model	Micra 200 E2 ERV WiFi					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average		Warm	
	-69.7	A+	-35.2	A	-12.8	E
Type of ventilation unit	Bidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	Recuperative					
Thermal efficiency of heat recovery (%)	68					
Maximum flow rate (m ³ /h)	200					
Electric power input (W)	134					
Reference flow rate (m ³ /s)	0.039					
Specific power input (SPI) (W/(m ³ /h))	0.415					
Control typology	Local demand control					
Maximum internal leakage rates (%)	0.1					
Maximum external leakage rates (%)	0.9					
Mixing rate (%)	20					
Airflow sensitivity at +20 Pa and -20 Pa (%)	0.93					
The indoor/outdoor air tightness (m ³ /h)	7					
Declared typology	RVU BVU					
Sound power level (dB(A))	36					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	824		287		242	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	8161		4172		1886	