



OV 2E 300



Wall-mounted axial fans


- Maximum airflow: 2230
- Sound pressure level LpA at 3 m: 53
- Motor type: AC
- Impeller type: Axial
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

| | Unit of measurement | OV 2E 300 |
|-----------------------------------|---------------------|-----------|
| Connected air duct size | mm | 300 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 145 |
| Unit current | A | 0.66 |
| Maximum airflow | m ³ /h | 2230 |
| Sound pressure level LpA at 3 m | dB(A) | 53 |
| Weight | kg | 6.1 |
| Transported air temperature (max) | °C | 60 |
| Transported air temperature (min) | °C | -30 |
| Ingress protection rating | - | IP24 |

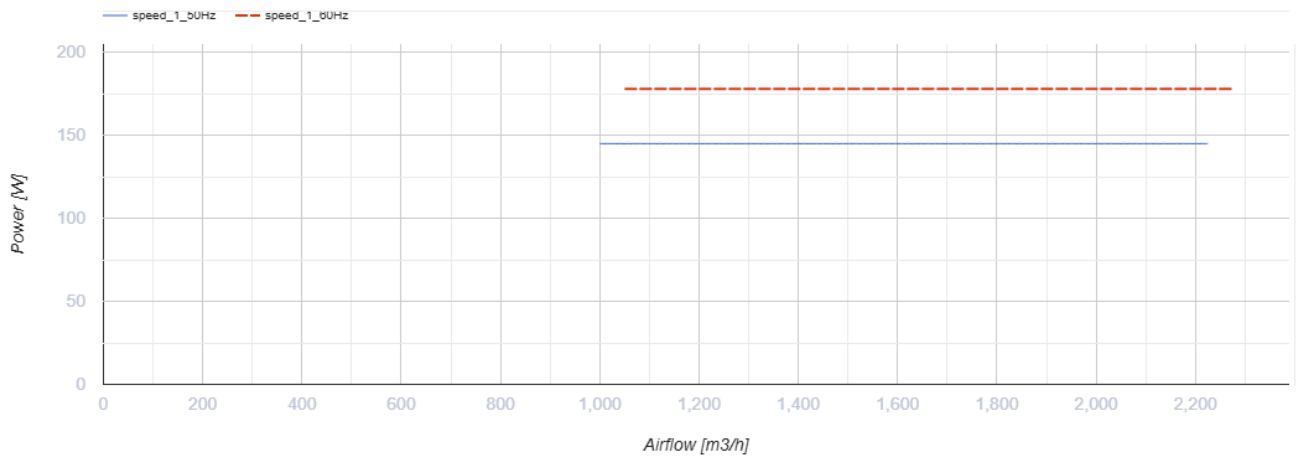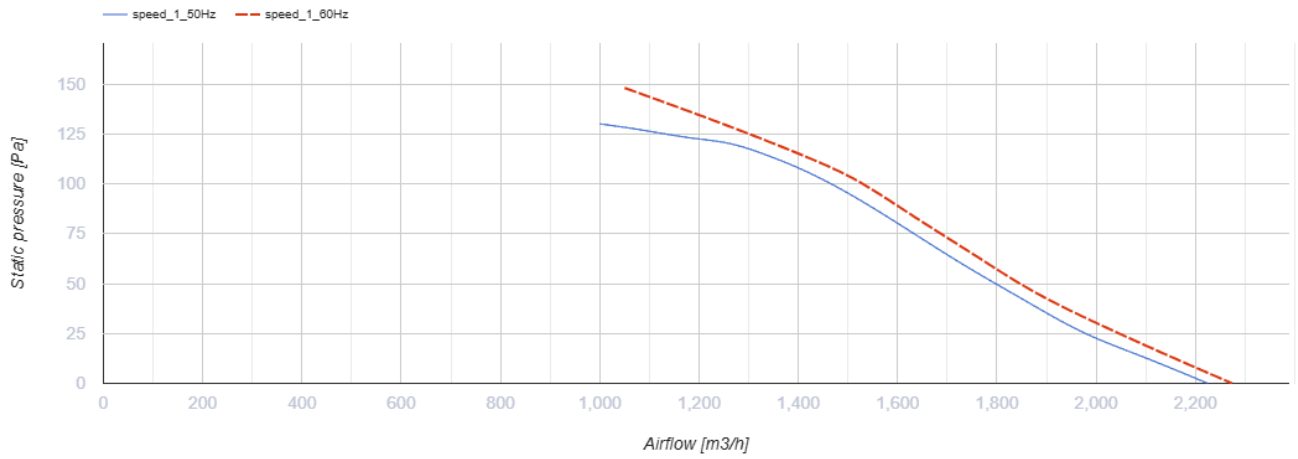

Dimensions

| ØD | Ød | B | B1 | L |
|-----------|-----------|----------|-----------|----------|
| 317 | 9 | 430 | 380 | 145 |

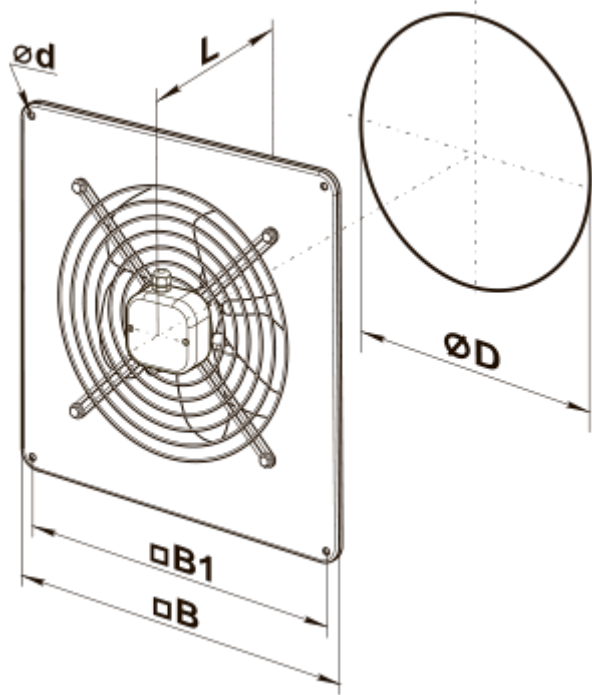

Ecodesign

| | |
|---------------------------------------|---------------------|
| Trademark | Vents |
| Model | OV 2E 300 |
| Type of drive installed | External MSD or VSD |
| Type of heat recovery system | None |
| Nominal flow rate (m ³ /s) | 0.383 |
| Nominal external pressure (Pa) | 110 |
| Maximum external leakage rates (%) | 2.7 |
| Static efficiency (%) | 30.5 |
| Declared typology | NRVU UVU |
| Effective electric power input (kW) | 0.141 |
| Sound power level (dB(A)) | 80 |