


# OV 4D 350




Low pressure axial fans in the steel casing for wall mounting

- Maximum airflow: 2350
- Sound pressure level LpA at 3 m: 46
- Motor type: AC
- Impeller type: Axial
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position


	Unit of measurement	OV 4D 350
Connected air duct size	mm	350
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50/60
Rated power	W	140
Unit current	A	0.38
Maximum airflow	m <sup>3</sup> /h	2350
Sound pressure level LpA at 3 m	dB(A)	46
Weight	kg	7.8
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IP24

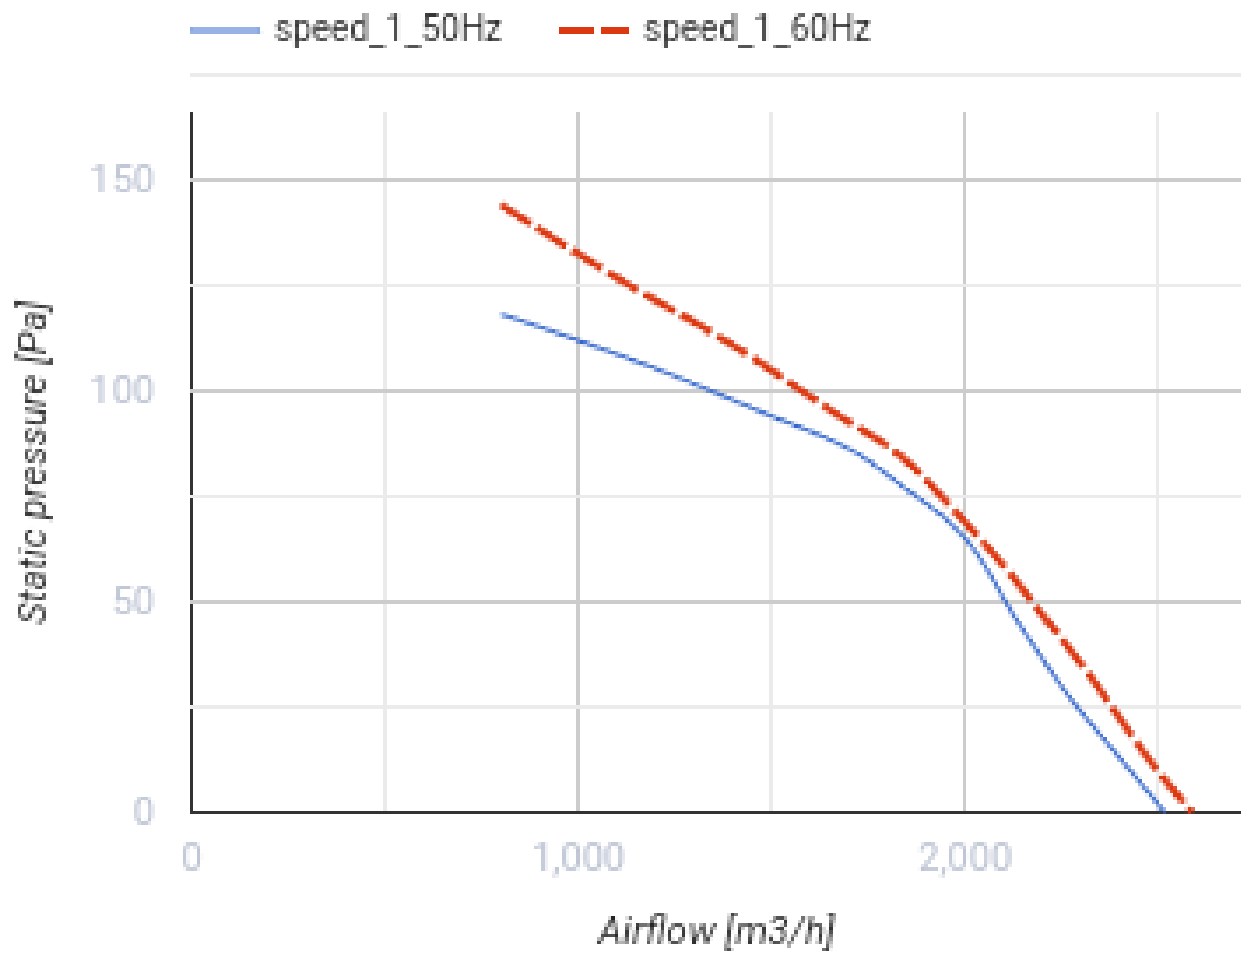

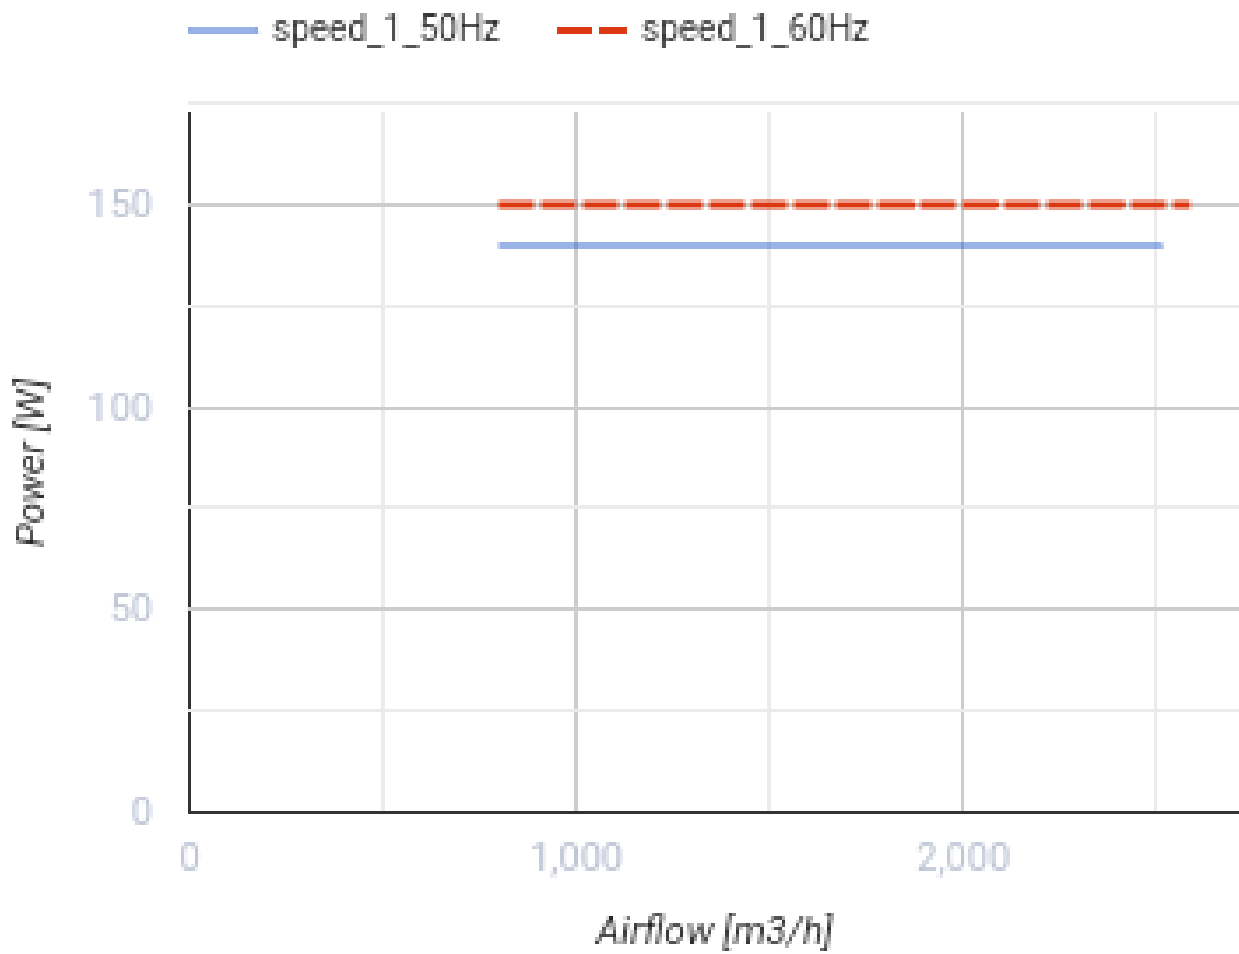

### Dimensions

<b>∅D</b>	<b>∅d</b>	<b>B</b>	<b>B1</b>	<b>L</b>
374	9	485	435	165

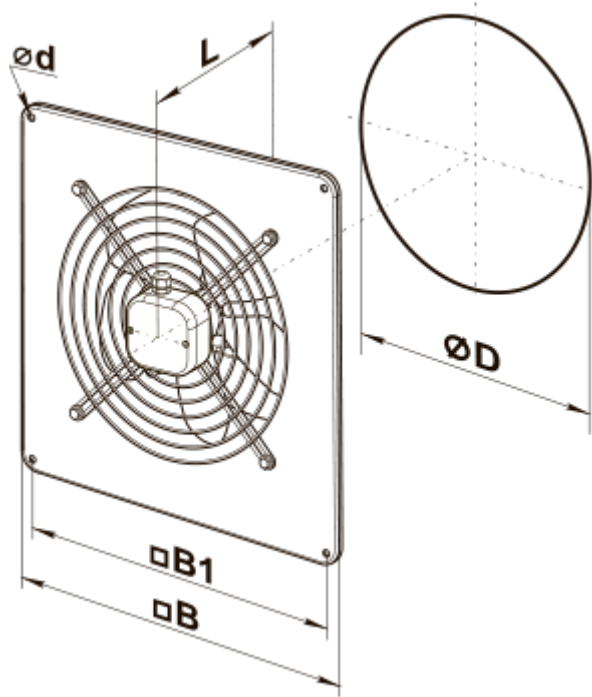

## Ecodesign

Trademark	Vents
Model	OV 4D 350
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m <sup>3</sup> /s)	0.501
Nominal external pressure (Pa)	80
Maximum external leakage rates (%)	2.7
Static efficiency (%)	31.7
Declared typology	NRVU UVU
Effective electric power input (kW)	0.129
Sound power level (dB(A))	82