PA 01 W4 LCD



Suspended air supply units in the sound- and heat-insulated casing with the water or electric heater

- Sound pressure level LpA at 3 m: 51
- Filter: G4 (F7 option)
- Sound-insulated casing
- Reheater: Water
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	PA 01 W4 LCD
Connected air duct size	mm	400x200
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	320
Unit current	A	0.55
Maximum airflow	m³/h	1200
Rotation speed at 50hz	-	2700
Sound pressure level LpA at 3 m	dB(A)	51
Weight	kg	57
Filter	-	G4 (F7 option)
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	-25
Ambient air temperature max	°C	55
Ingress protection rating	-	IP22
Ambient air humidity max	%	80
Ingress protection rating of the drive	-	IP44

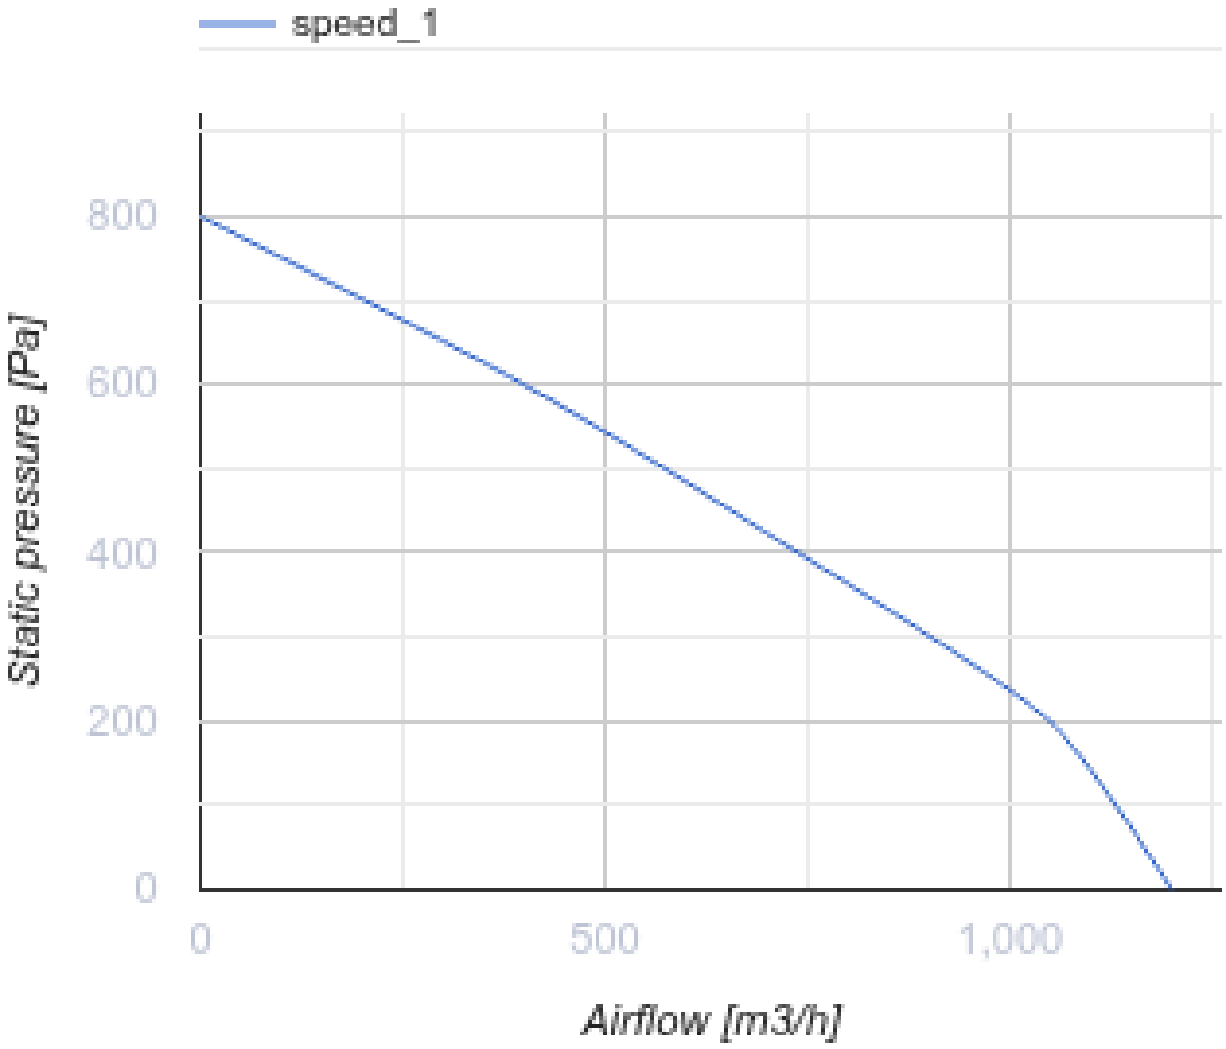

Dimensions

B	B1	B2	B3	H	H1	H2	L	L1
400	420	624	582	200	220	374	1145	1106

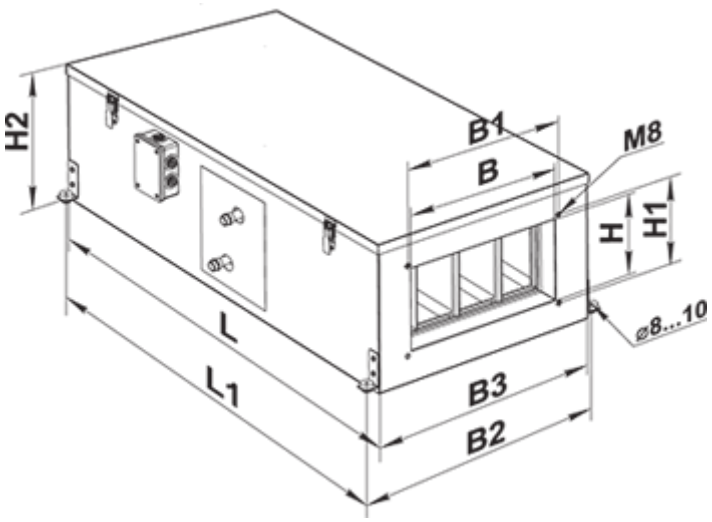

Accessories

For rectangular ducts

Name	Photo	Description
SR 400x200		Plate silencer for installation in rectangular ducts

For rectangular ducts

Name	Photo	Description
VVG 400x200		Flexible anti-vibration inserts for round air ducts

Mixing chambers

Name	Photo	Description
SKRA 400x200/24		Mixing chambers for mixing (recirculating) part of the exhaust air with the outdoor air in the appropriate proportion

Water coolers

Name	Photo	Description
OKW 400x200-3		Rectangular inline water coolers

Mixing chambers

Name	Photo	Description

USWK 3/4-4		The mixing unit USWK is designed for smooth heat medium flow control in ventilation systems equipped with water heaters or coolers for supply air temperature regulation
USWK 3/4-6		The mixing unit USWK is designed for smooth heat medium flow control in ventilation systems equipped with water heaters or coolers for supply air temperature regulation

Airflow regulators

Name	Photo	Description
RRV 400x200		Air flow controllers

Freon coolers

Name	Photo	Description
OKF 400x200-3		Rectangular inline direct evaporative coolers

Other accessories

Name	Photo	Description
SFK 474x269x27 F7		F7 pocket filter
SFK 474x269x27 G4		G4 pocket filter