

Quiet-Mild 150 TH




Extra quiet axial extract fans with low power consumption

- Maximum airflow: 315
- Sound pressure level LpA at 3 m: 33
- Motor type: AC
- Casing material: Polypropylene/Thermoplastic elastomer
- Backdraft protection: Backdraft damper
- Humidity sensor
- Timer: Turn off timer

| | Unit of measurement | Quiet-Mild 150 TH | |
|---------------------------------|---------------------|-------------------|------|
| Connected air duct size | mm | 150 | |
| Speed | - | 2 | |
| Minimum supply voltage | V | 220 | |
| Maximum supply voltage | V | 240 | |
| Power supply frequency | Hz | 50/60 | |
| Rated power | W | 17 | 19 |
| Unit current | A | 0.08 | 0.09 |
| Maximum airflow | m ³ /h | 220 | 315 |
| Sound pressure level LpA at 3 m | dB(A) | 28 | 33 |
| Weight | kg | 1.33 | |
| Ambient air temperature min | °C | 1 | |
| Ambient air temperature max | °C | 40 | |
| Ingress protection rating | - | IP45 | |


Dimensions

| ØD | B | H | L | L1 |
|-------|-----|-----|-----|----|
| 147.5 | 214 | 190 | 111 | 32 |

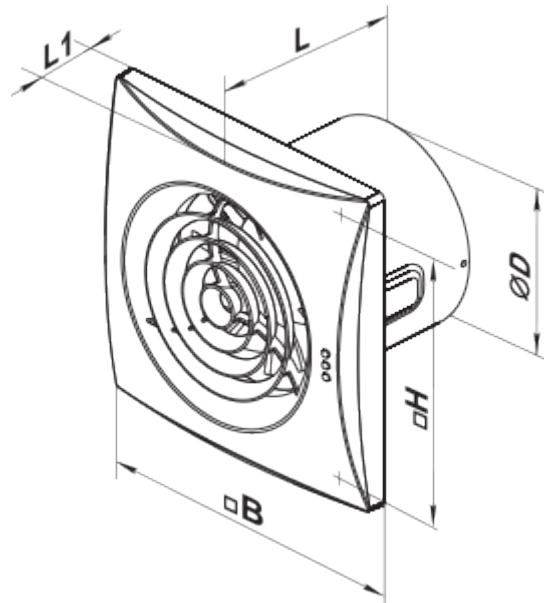


Accessories

Flanges

| Name | Photo | Description |
|------------------------|---|--|
| FO_150 |  | The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF |

Ecodesign

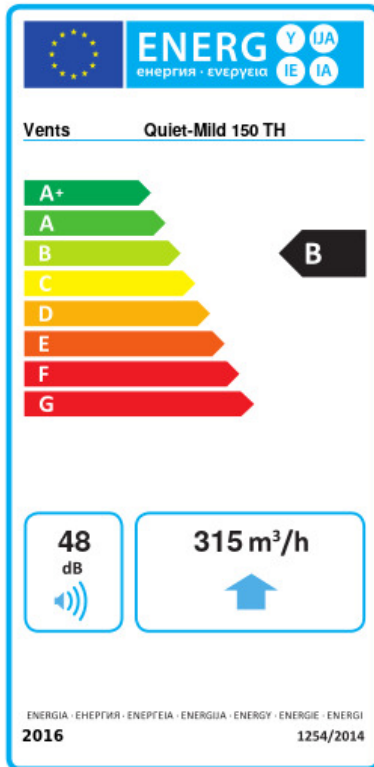

| | | | | | | |
|---|----------------------|----|---------|---|-------|---|
| Trademark | Vents | | | | | |
| Model | Quiet-Mild 150 TH | | | | | |
| Specific energy consumption (SEC) (kWh/(m ² /a)) | Cold | | Average | | Warm | |
| | -53.9 | A+ | -26.9 | B | -11.4 | E |
| Type of ventilation unit | Unidirectional | | | | | |
| Type of drive installed | 2-speed | | | | | |
| Type of heat recovery system | None | | | | | |
| Maximum flow rate (m ³ /h) | 315 | | | | | |
| Electric power input (W) | 19 | | | | | |
| Reference flow rate (m ³ /s) | 0.061 | | | | | |
| Specific power input (SPI) (W/(m ³ /h)) | 0.077 | | | | | |
| Control typology | Local demand control | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Declared typology | RVU UVU | | | | | |
| Sound power level (dB(A)) | 48 | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 58 | | 58 | | 58 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 5536 | | 2830 | | 1280 | |