



VKF 4E 400



Low pressure axial fans in the steel casing with for wall mounting

- Maximum airflow: 3580
- Sound pressure level LpA at 3 m: 53
- Motor type: AC
- Impeller type: Axial
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	VKF 4E 400
Connected air duct size	mm	400
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	180
Unit current	A	0.82
Maximum airflow	m ³ /h	3580
Sound pressure level LpA at 3 m	dB(A)	53
Weight	kg	8.1
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IPX4

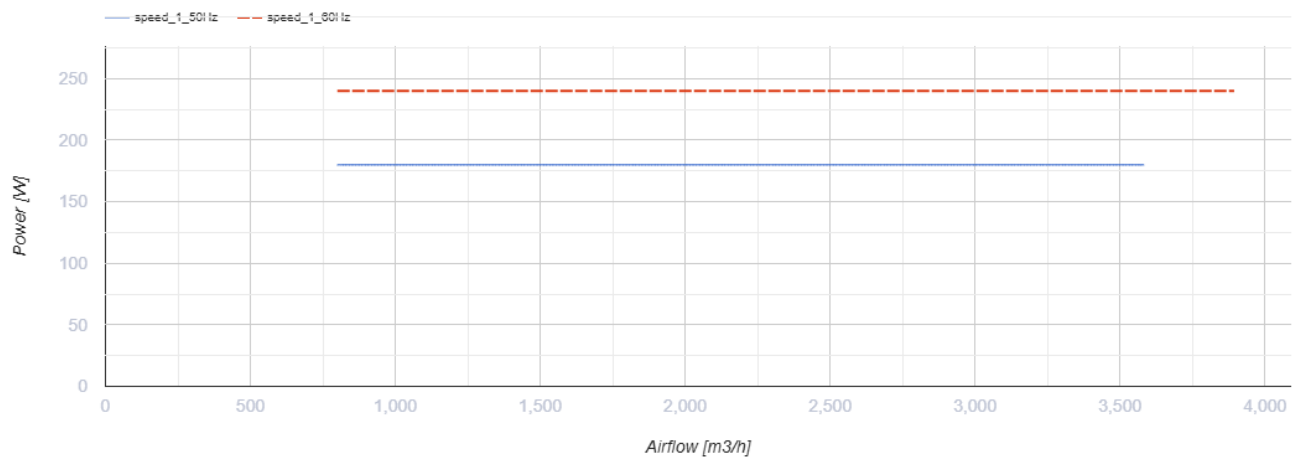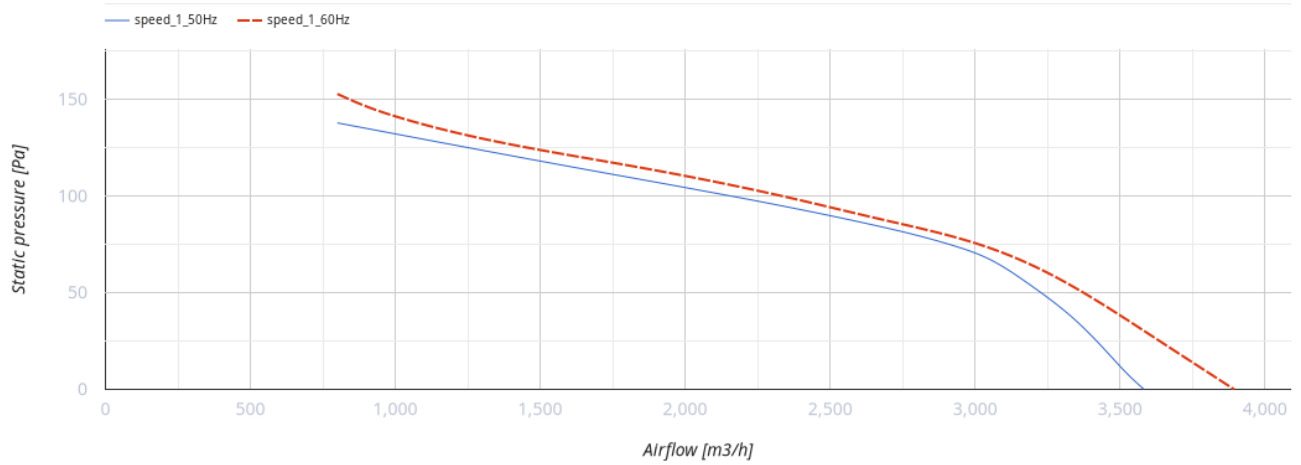

Dimensions

ØD	ØD1	ØD2	Ød	B	L
412	438	465	9.5	500	170



Ecodesign

Trademark	Vents
Model	VKF 4E 400
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m ³ /s)	0.774
Nominal external pressure (Pa)	80
Maximum external leakage rates (%)	2.7
Static efficiency (%)	33.8
Declared typology	NRVU UVU
Effective electric power input (kW)	0.187
Sound power level (dB(A))	83