



# VKHz 6D 500



Centrifugal roof fans with horizontal air exhaust

- Maximum airflow: 6000
- Sound pressure level LpA at 3 m: 52
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel

	Unit of measurement	VKHz 6D 500
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50/60
Rated power	W	440
Unit current	A	1.23
Maximum airflow	m <sup>3</sup> /h	6000
Sound pressure level LpA at 3 m	dB(A)	52
Weight	kg	52.7
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP54

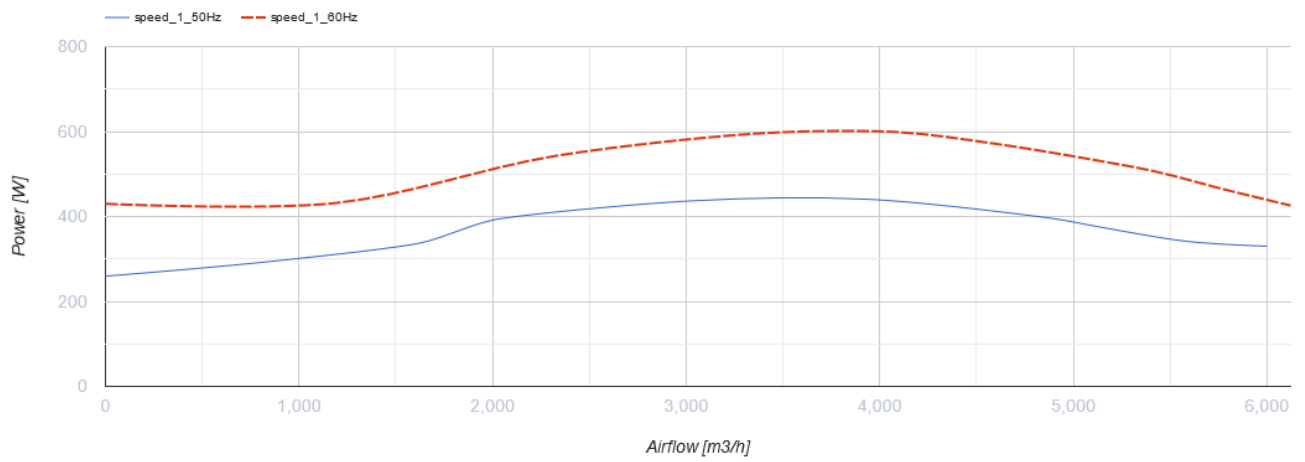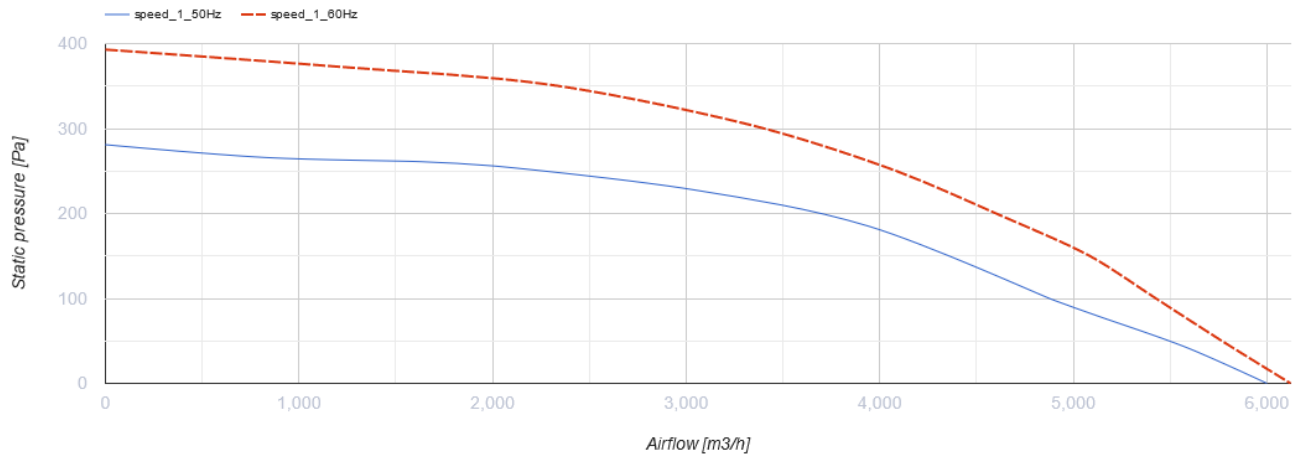

## Dimensions

H	H1	A	B	C	Ød	ØD
461	501	710	700	535	11	438



## Ecodesign

Trademark	Vents
Model	VKHz 6D 500
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m <sup>3</sup> /s)	1.095
Nominal external pressure (Pa)	185
Maximum external leakage rates (%)	2.7
Static efficiency (%)	47
Declared typology	NRVU UVU
Effective electric power input (kW)	0.44
Sound power level (dB(A))	72