



VKP 100/100*5 mini X3



Compact centrifugal fans in steel casing with permanent air flow maintaining at alternating pressure in the system

- Maximum airflow: 176
- Sound pressure level LpA at 3 m: 44
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position

| | Unit of measurement | VKP 100/100*5 mini X3 | | |
|--|---------------------|-----------------------|------|-----|
| Connected air duct size | mm | 100 | | |
| Speed | - | 3 | | |
| Minimum supply voltage | V | 230 | | |
| Maximum supply voltage | V | 230 | | |
| Power supply frequency | Hz | 50 | | |
| Rated power | W | 20 | 26 | 45 |
| Unit current | A | 0.32 | 0.34 | 0.4 |
| Maximum airflow | m ³ /h | 97 | 138 | 176 |
| Sound pressure level LpA at 3 m | dB(A) | 33 | 36 | 44 |
| Weight | kg | 3.37 | | |
| Transported air temperature (max) | °C | 50 | | |
| Ingress protection rating | - | IPX4 | | |
| Ingress protection rating of the drive | - | IP44 | | |

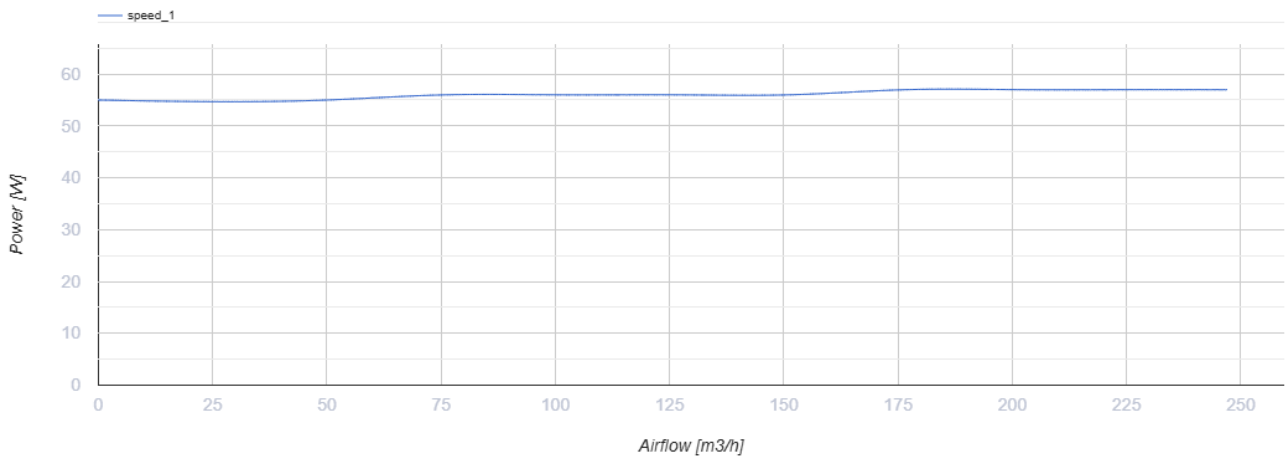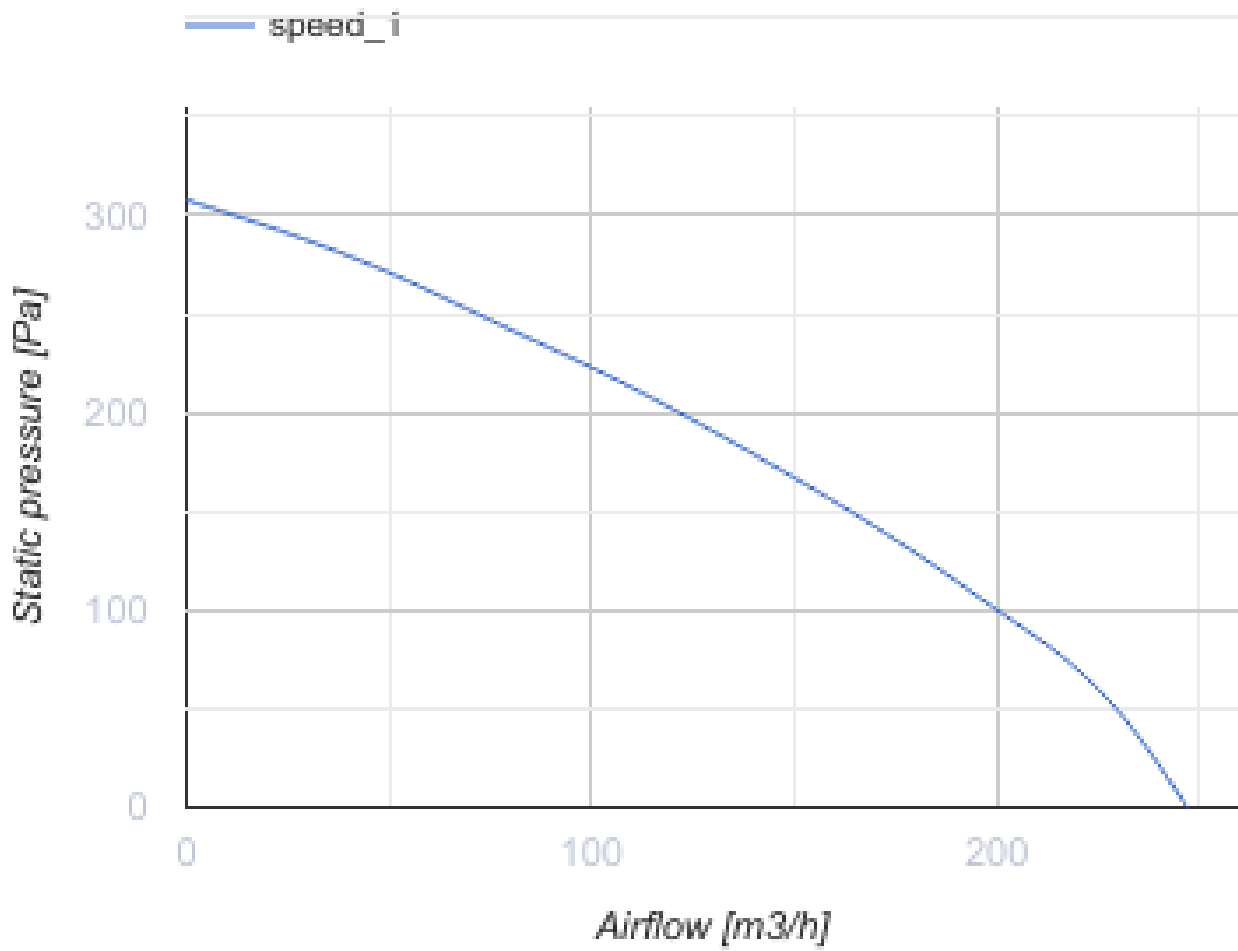

Dimensions

| ØD | ØD1 | B | H | H1 | L | L2 |
|----|-----|-----|-----|-----|-----|-----|
| 99 | 99 | 252 | 110 | 166 | 351 | 253 |

